



## **IPTC Standards**



### Specification Version 1.3 Power Conformance Level

Document Revision 1

International Press Telecommunications Council  
Copyright © 2009. All Rights Reserved.  
[www.iptc.org](http://www.iptc.org)

---



## Copyrights

Copyright © 2009 by IPTC, the International Press Telecommunications Council. All Rights Reserved.

This project intends to use materials that are either in the public domain or are available by the permission for their respective copyright holders. Permissions of copyright holder will be obtained prior to use of protected material. All materials of this IPTC standard covered by copyright shall be licensable at no charge.

## Acknowledgements

This documentation is the result of a team effort by members of the International Press Telecommunications Council, with input and assistance from other contributors.

The document reflects and includes contributions from work by the following persons (ordered by family name):

The effort to develop EventsML-G2 was lead by Johan Lindgren (Tidningarnas Telegrambyrå) and these persons contributed: Dominic Chan (CNW Group), Arnaud Descamps (Relax News), Darko Gulija (HINA), Geoffrey Haynes (AP), George Landau (NewsEngin), Laurent Le Meur (AFP), Michele Mottini (Tera DP), Michael Steidl (IPTC Managing Director), Charles Tichenor (AP).

The Technical Writer of this document was Scott Meltzer.

## About the Standard

### Specification Versioning History

Version	Issue Date	Approved by	Remarks
1.0	2008-01-31	IPTC Standards Committee	
1.3	2009-06-17	IPTC Standards Committee	

### Document Revision History

Revision	Issue Date	Author (revised by)	Remarks
1	2009-09-04	Michael Steidl	

### About this Document

This document specifies the IPTC news exchange standard EventsML-G2 which is a conceptual and processing model making freely available the IPTC knowledge of the most effective ways to structure, describe, manage and exchange newsworthy information about events.

### Status of this Document

This document is under the governance of the IPTC EventsML-G2 Working Group (EventsML-G2 WG) of the IPTC G2-Standards Working Party (G2S WP).

This is a specification document which was endorsed by the IPTC members and may be updated, replaced or obsoleted by other documents at any time.

Public versions of this document and of related IPTC documents are available at:

<http://www.iptc.org/std/EventsML-G2/1.3/>

Public comments should be sent to the forum and mailing list at:

<http://tech.groups.yahoo.com/group/eventsml-g2>

A page with all errata not covered by the latest version of the EventsML-G2 specification is available at:

<http://www.iptc.org/goto?EventsML-G2-Errata>



## The Full Set of Specification Documents

The full set of specification documents for EventsML-G2 1.3 consists of (file names are added, # is to be substituted by the most current document revision number):

- ◆ This Specification document - EventsML-G2\_1.3-spec-CCL\_#.pdf
- ◆ These XML Schema files:

For the Core Conformance Level (see [Conformance Levels](#) on page 15):

- EventsML-G2\_1.3-spec-Framework-Core.xsd
- EventsML-G2\_1.3-spec-Framework-Core\_#.xsd
- EventsML-G2\_1.3-spec-ConceptItem-Core.xsd
- EventsML-G2\_1.3-spec-ConceptItem-Core\_#.xsd
- EventsML-G2\_1.3-spec-KnowledgeItem-Core.xsd
- EventsML-G2\_1.3-spec-KnowledgeItem-Core\_#.xsd
- NAR\_1.5-spec-Framework-Core.xsd
- NAR\_1.5-spec-Framework-Core\_1.xsd

For the Power Conformance Level (see [Conformance Levels](#) on page 15):

- EventsML-G2\_1.3-spec-Framework-Power.xsd
- EventsML-G2\_1.3-spec-Framework-Power\_#.xsd
- EventsML-G2\_1.3-spec-ConceptItem-Power.xsd
- EventsML-G2\_1.3-spec-ConceptItem-Power\_#.xsd
- EventsML-G2\_1.3-spec-KnowledgeItem-Power.xsd
- EventsML-G2\_1.3-spec-KnowledgeItem-Power\_#.xsd
- NAR\_1.5-spec-Framework-Power.xsd
- NAR\_1.5-spec-Framework-Power\_1.xsd

All files above can be obtained from:

<http://www.iptc.org/std/EventsML-G2/1.3/specification/>

## Note on the XML Schema File Names

XML Schemas are revised for two reasons:

- ◆ The EventsML-G2 specifications have been changed: this results in a new version of the standards, this will be reflected by a new path to files and a new standard version number like EventsML-G2\_1.9
- ◆ The XML Schema has been edited a) to fix errors and b) to change non-normative parts, like the wording of an element's annotation: this is reflected by a new revision number at the end of the file name like the "8" in EventsML-G2\_1.3-spec-Framework-Core\_8.xsd.

The XML Schema files without the document revision number (e.g. "\_8") at the end of the file name are true copies of the latest document revision. This allows to apply a persistent reference to the latest XML Schema file version regardless of any edits of the document.



## License Agreement

This document is issued under the *Non-Exclusive License Agreement for International Press Telecommunications Council Specifications and Related Documentation*

Important: International Press Telecommunications Council (IPTC) standard specifications for news (the Specifications) and supporting software, documentation, technical reports, web sites and other material related to the Specifications (the Materials) including the document accompanying this license (the Document), whether in a paper or electronic format, are made available to you subject to the terms stated below. By obtaining, using and/or copying the Specifications or Materials, you (the licensee) agree that you have read, understood, and will comply with the following terms and conditions.

1. The Specifications and Materials are licensed for use only on the condition that you agree to be bound by the terms of this license. Subject to this and other licensing requirements contained herein, you may, on a non-exclusive basis, use the Specifications and Materials.

2. The IPTC openly provides the Specifications and Materials for voluntary use by individuals, partnerships, companies, corporations, organizations and any other entity for use at the entity's own risk. This disclaimer, license and release is intended to apply to the IPTC, its officers, directors, agents, representatives, members, contributors, affiliates, contractors, or co-venturers acting jointly or severally.

3. The Document and translations thereof may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the copyright and license notices and references to the IPTC appearing in the Document and the terms of this Specifications License Agreement are included on all such copies and derivative works. Further, upon the receipt of written permission from the IPTC, the Document may be modified for the purpose of developing applications that use IPTC Specifications or as required to translate the Document into languages other than English.

4. Any use, duplication, distribution, or exploitation of the Document and Specifications and Materials in any manner is at your own risk.

5. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE REGARDING THE ACCURACY, ADEQUACY, COMPLETENESS, LEGALITY, RELIABILITY OR USEFULNESS OF ANY INFORMATION CONTAINED IN THE DOCUMENT OR IN ANY SPECIFICATION OR OTHER PRODUCT OR SERVICE PRODUCED OR SPONSORED BY THE IPTC. THE DOCUMENT AND THE INFORMATION CONTAINED HEREIN AND INCLUDED IN ANY SPECIFICATION OR OTHER PRODUCT OR SERVICE OF THE IPTC IS PROVIDED ON AN "AS IS" BASIS. THE IPTC DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY ACTUAL OR ASSERTED WARRANTY OF NON-INFRINGEMENT OF PROPRIETARY RIGHTS, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. NEITHER THE IPTC NOR ITS CONTRIBUTORS SHALL BE HELD LIABLE FOR ANY IMPROPER OR INCORRECT USE OF INFORMATION. NEITHER THE IPTC NOR ITS CONTRIBUTORS ASSUME ANY RESPONSIBILITY FOR ANYONE'S USE OF INFORMATION PROVIDED BY THE IPTC. IN NO EVENT SHALL THE IPTC OR ITS CONTRIBUTORS BE LIABLE TO ANYONE FOR DAMAGES OF ANY KIND, INCLUDING BUT NOT LIMITED TO, COMPENSATORY DAMAGES, LOST PROFITS, LOST DATA OR ANY FORM OF SPECIAL, INCIDENTAL, INDIRECT, CONSEQUENTIAL OR PUNITIVE DAMAGES OF ANY KIND WHETHER BASED ON BREACH OF CONTRACT OR WARRANTY, TORT, PRODUCT LIABILITY OR OTHERWISE.

6. The IPTC takes no position regarding the validity or scope of any Intellectual Property or other rights that might be claimed to pertain to the implementation or use of the technology described in the Document or the extent to which any license under such rights might or might not be available. The IPTC does not represent that it has made any effort to identify any such rights. Copies of claims of rights made available for publication, assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of the Specifications and Materials, can be obtained from the Managing Director of the IPTC.

7. By using the Specifications and Materials including the Document in any manner or for any purpose, you release the IPTC from all liabilities, claims, causes of action, allegations, losses, injuries, damages, or detriments of any nature arising from or relating to the use of the Specifications, Materials or any portion thereof. You further agree not to file a lawsuit, make a claim, or take any other formal or informal legal action against the IPTC, resulting from your acquisition, use, duplication, distribution, or exploitation of the Specifications, Materials or any portion thereof. Finally, you hereby agree that the IPTC is not liable for



any direct, indirect, special or consequential damages arising from or relating to your acquisition, use, duplication, distribution, or exploitation of the Specifications, Materials or any portion thereof.

8. Specifications and Materials may be downloaded or copied provided that ALL copies retain the ownership, copyright and license notices.

9. Materials may not be edited, modified, or presented in a context that creates a misleading or false impression or statement as to the positions, actions, or statements of the IPTC.

10. The name and trademarks of the IPTC may not be used in advertising, publicity, or in relation to products or services and their names without the specific, written prior permission of the IPTC. Any permitted use of the trademarks of the IPTC, whether registered or not, shall be accompanied by an appropriate mark and attribution, as agreed with the IPTC.

11. Specifications may be extended by both members and non-members to provide additional functionality (Extended Specifications) provided that there is a clear recognition of the IPTC IP and its ownership in the Extended Specifications and the related documentation and provided that the extensions are clearly identified and provided that a perpetual license is granted by the creator of the Extended Specifications for other members and non-members to use the Extended Specifications and to continue extensions of the Extended Specifications. The IPTC does not waive any of its rights in the Specifications and Materials in this context. The Extended Specifications may be considered the intellectual property of their creator. The IPTC expressly disclaims any responsibility for damage caused by an extension to the Specifications.

12. Specifications and Materials may be included in derivative work of both members and non-members provided that there is a clear recognition of the IPTC IP and its ownership in the derivative work and its related documentation. The IPTC does not waive any of its rights in the Specifications and Materials in this context. Derivative work in its entirety may be considered the intellectual property of the creator of the work. The IPTC expressly disclaims any responsibility for damage caused when its IP is used in a derivative context.

13. This Specifications License Agreement is perpetual subject to your conformance to the terms of this Agreement. The IPTC may terminate this Specifications License Agreement immediately upon your breach of this Agreement and, upon such termination you will cease all use, duplication, distribution, and/or exploitation in any manner of the Specifications and Materials.

14. This Specifications License Agreement reflects the entire agreement of the parties regarding the subject matter hereof and supersedes all prior agreements or representations regarding such matters, whether written or oral. To the extent any portion or provision of this Specifications License Agreement is found to be illegal or unenforceable, then the remaining provisions of this Specifications License Agreement will remain in full force and effect and the illegal or unenforceable provision will be construed to give it such effect as it may properly have that is consistent with the intentions of the parties.

15. This Specifications License Agreement may only be modified in writing signed by an authorized representative of the IPTC.

16. This Specifications License Agreement is governed by the law of United Kingdom, as such law is applied to contracts made and fully performed in the United Kingdom. Any disputes arising from or relating to this Specifications License Agreement will be resolved in the courts of the United Kingdom. You consent to the jurisdiction of such courts over you and covenant not to assert before such courts any objection to proceeding in such forums.

**IF YOU DO NOT AGREE TO THESE TERMS YOU MUST CEASE ALL USE OF THE SPECIFICATIONS AND MATERIALS NOW. IF YOU HAVE ANY QUESTIONS ABOUT THESE TERMS, PLEASE CONTACT THE MANAGING DIRECTOR OF THE INTERNATIONAL PRESS TELECOMMUNICATION COUNCIL. AS OF THE DATE OF THIS REVISION OF THIS SPECIFICATIONS LICENSE AGREEMENT YOU MAY CONTACT THE IPTC at [www.iptc.org](http://www.iptc.org).**

License agreement version of: 30 January 2006



# Contents

- 1 Introduction to EventsML-G2 ..... 13
  - 1.1 Overview ..... 13
    - 1.1.1 What is EventsML-G2? ..... 13
    - 1.1.2 Business Advantages of Using EventsML-G2 ..... 13
    - 1.1.3 What is an Event – to be represented by EventsML-G2 ..... 13
  - 1.2 Definitions ..... 14
    - 1.2.1 Event Information ..... 14
    - 1.2.2 Coverage Information ..... 14
    - 1.2.3 The Data Model ..... 14
  - 1.3 Conformance Levels ..... 15
  - 1.4 EventsML-G2 and iCalendar ..... 15
- 2 Events ..... 17
  - 2.1 The Core Information about Events ..... 17
  - 2.2 Event Information in Items ..... 18
    - 2.2.1 Identification and Versioning of Items ..... 18
    - 2.2.2 Events in a NewsItem ..... 18
      - 2.2.2.1 News Metadata ..... 19
    - 2.2.3 An Event in a Concept Item or Many Events in a Knowledge Item ..... 19
- 3 Representing News - newsItem ..... 22
  - 3.1 Description ..... 22
  - 3.2 Indication of Compliance with a Standard and Conformance Level ..... 22
  - 3.3 Identification and Versioning ..... 22
  - 3.4 Catalog of Controlled Vocabularies ..... 23
  - 3.5 Signature Information ..... 24
  - 3.6 Rights Information ..... 24
  - 3.7 Item Metadata ..... 25
    - 3.7.1 Management Metadata ..... 25
    - 3.7.2 Processing the Publish Status of an Item ..... 25
      - 3.7.2.1 State Transition Diagram ..... 26
      - 3.7.2.2 Use Cases Associated with a Status of Withheld ..... 26
      - 3.7.2.3 Processing Model on the Recipient Side ..... 26
    - 3.7.3 Processing of versionCreated ..... 27
  - 3.8 Item Links ..... 27
    - 3.8.1 Processing Links ..... 28
  - 3.9 News Content Metadata ..... 28
    - 3.9.1 Administrative Metadata ..... 28
      - 3.9.1.1 Dates Processing Model ..... 29
      - 3.9.1.2 Audience Processing Model ..... 29
    - 3.9.2 Descriptive Metadata ..... 29
    - 3.9.3 Other Content Metadata ..... 30
  - 3.10 Part Metadata ..... 30
    - 3.10.1 Edit Units and Time Codes ..... 31
    - 3.10.2 Time Unit Types and Start/End Timestamp Formats ..... 31
    - 3.10.3 Assertions About Concepts ..... 31
  - 3.11 References to Inline Concepts ..... 32
  - 3.12 newsItem Content ..... 32
  - 3.13 News Content Characteristics ..... 33
  - 3.14 Channels ..... 33
- 4 Representing Concept Information - concept Component ..... 34



- 4.1 Concept Component ..... 34
- 4.2 Relationships Between Concepts ..... 34
- 4.3 Details on Specific Entities ..... 35
  - 4.3.1 Contact Information ..... 35
  - 4.3.2 Postal Address ..... 35
- 5 Managing Individual Concepts - conceptItem ..... 36
  - 5.1 Description ..... 36
  - 5.2 Structure of a conceptItem ..... 36
  - 5.3 Item Metadata ..... 36
  - 5.4 Concept related Metadata ..... 36
  - 5.5 conceptItem Content ..... 36
- 6 Managing Sets of Concepts - knowledgeItem ..... 37
  - 6.1 Description ..... 37
  - 6.2 Structure of a knowledgeItem ..... 37
  - 6.3 Item Metadata ..... 37
  - 6.4 Knowledge Related Metadata ..... 37
  - 6.5 knowledgeItem Content ..... 37
- 7 Packaging Items - packageItem ..... 38
  - 7.1 Structure of a packageItem ..... 38
  - 7.2 Item Metadata ..... 38
  - 7.3 Package Related Metadata ..... 38
  - 7.4 packageItem Content ..... 38
- 8 Dealing with Controlled Values ..... 40
  - 8.1 {scheme, code} Pair, Scheme URI and Concept URI ..... 40
  - 8.2 Qualified Code (QCode) ..... 41
    - 8.2.1 Lexical Space Specification and Processing Model for Scheme URIs, Scheme Aliases, Codes, and QCodes 41
      - 8.2.1.1 Lexical Space ..... 41
      - 8.2.1.2 Processing Model ..... 42
  - 8.3 Processing Catalogs ..... 43
    - 8.3.1 Structure of a Catalog ..... 43
    - 8.3.2 Processing Remote Catalogs ..... 43
    - 8.3.3 Caching a Catalog ..... 43
    - 8.3.4 Checking a Catalog ..... 43
  - 8.4 Processing Schemes ..... 43
    - 8.4.1 Evolution of Scheme URIs ..... 43
    - 8.4.2 Retrieving All Terms of a Scheme ..... 43
  - 8.5 Qualified and Typed Properties ..... 44
  - 8.6 Flexible Properties ..... 44
  - 8.7 Composite Concepts ..... 45
  - 8.8 Editing Attributes ..... 45
- 9 Dealing with Labels and Blocks ..... 46
  - 9.1 Introduction ..... 46
  - 9.2 Internationalization Attributes ..... 46
- 10 Exchanging Items - newsMessage ..... 47
  - 10.1 Message Information ..... 47
  - 10.2 About Using Schemes in a newsMessage ..... 47
- 11 Specification Reference ..... 48



11.1 Introduction to the Common Components .....	48
11.2 General Specifications .....	48
11.2.1 XML Namespaces .....	48
11.2.2 MIME Types .....	49
11.2.3 Extension Points in XML .....	49
11.3 Implementation Design Rules .....	49
11.4 Processing Model Terminology .....	49
11.5 Component Structure Format .....	50
11.6 Element Definitions .....	51
11.6.1 Access .....	51
11.6.2 Access Status .....	52
11.6.3 Accountable Person .....	53
11.6.4 Address Line .....	54
11.6.5 Affiliation .....	55
11.6.6 Alternative Identifier .....	56
11.6.7 Alternative Locator .....	57
11.6.8 Alternative Representation .....	58
11.6.9 Anchor .....	59
11.6.10 Assertion .....	60
11.6.11 Assigned To .....	61
11.6.12 Audience .....	62
11.6.13 Bag .....	63
11.6.14 Bag Item .....	64
11.6.15 Broader .....	65
11.6.16 By .....	66
11.6.17 Capacity .....	67
11.6.18 Catalog .....	68
11.6.19 Channel of Remote Content .....	69
11.6.20 Channel for News Message .....	71
11.6.21 Concept .....	72
11.6.22 Concept Definition .....	73
11.6.23 Concept Identifier .....	74
11.6.24 Concept Item .....	75
11.6.25 Concept Name .....	76
11.6.26 Concept Set .....	77
11.6.27 Confirmation .....	78
11.6.28 Contact Information .....	79
11.6.29 Content Metadata for Concept Items .....	80
11.6.30 Content Metadata for Knowledge Items .....	81
11.6.31 Content Metadata for News Items .....	82
11.6.32 Content Metadata for Package Items .....	83
11.6.33 Content Provider .....	85
11.6.34 Content Set .....	86
11.6.35 Contributor .....	87
11.6.36 Copyright Holder .....	88
11.6.37 Copyright Notice .....	89
11.6.38 Country .....	90
11.6.39 Country Area .....	91
11.6.40 Creator .....	92
11.6.41 Credit Line .....	93
11.6.42 Date Content Created .....	94
11.6.43 Date Content Modified .....	95
11.6.44 Date Item Embargo Ends .....	96
11.6.45 Date Item First Created .....	97
11.6.46 Date Item Version Created .....	98
11.6.47 Date of Birth .....	99





11.6.48 Date of Death ..... 100

11.6.49 Date of Dissolution ..... 101

11.6.50 Date of Foundation ..... 102

11.6.51 Date of Transmission ..... 103

11.6.52 Dateline ..... 104

11.6.53 Dates ..... 105

11.6.54 Recurrence Group ..... 105

11.6.55 Date Resource Created ..... 106

11.6.56 Description ..... 107

11.6.57 Destination ..... 108

11.6.58 Duration ..... 109

11.6.59 Editorial Note ..... 110

11.6.60 Editorial Service ..... 111

11.6.61 Email Address ..... 112

11.6.62 End Date/Time ..... 113

11.6.63 Event ..... 114

11.6.64 Event Details ..... 115

11.6.65 Event Location ..... 116

11.6.66 Events Wrapper ..... 117

11.6.67 Excluded Audience ..... 118

11.6.68 Exclusion Date ..... 119

11.6.69 Exclusion Rule ..... 120

11.6.70 Facet ..... 121

11.6.71 Fax Number ..... 122

11.6.72 File Name ..... 123

11.6.73 G2 Content Type ..... 124

11.6.74 G2 Item Class ..... 125

11.6.75 Generator Tool ..... 126

11.6.76 Genre ..... 127

11.6.77 Geographic Position ..... 128

11.6.78 Geopolitical Area Details ..... 129

11.6.79 Group ..... 130

11.6.80 Group Reference ..... 131

11.6.81 Group Set ..... 132

11.6.82 Headline ..... 133

11.6.83 Icon ..... 134

11.6.84 Inline Concept Marker ..... 135

11.6.85 Inline Data (NewsML-G2 Specific) ..... 136

11.6.86 Inline Reference ..... 138

11.6.87 Inline XML (NewsML-G2 Specific) ..... 139

11.6.88 Instance Of ..... 141

11.6.89 Instant Messaging Address ..... 142

11.6.90 Information Source ..... 143

11.6.91 Item Class ..... 144

11.6.92 Item Metadata ..... 145

11.6.93 Item Reference ..... 146

11.6.94 Item Set ..... 147

11.6.95 Item Title ..... 148

11.6.96 Keyword ..... 149

11.6.97 Knowledge Item ..... 150

11.6.98 Language ..... 151

11.6.99 Line Break ..... 152

11.6.100 Link ..... 153

11.6.101 Locality ..... 154

11.6.102 Located ..... 155

11.6.103 Location ..... 156

11.6.104 Location Details ..... 157

11.6.105 Member Of ..... 158



11.6.106 Message Header .....	159
11.6.107 Narrower .....	160
11.6.108 News Coverage .....	161
11.6.109 News Coverage Status .....	162
11.6.110 News Item (NewsML-G2 Specific) .....	163
11.6.111 News Message .....	164
11.6.112 Note .....	165
11.6.113 Object Details .....	166
11.6.114 Occurrence Status .....	167
11.6.115 Opening Hours .....	168
11.6.116 Origin .....	169
11.6.117 Organisation Details .....	170
11.6.118 Organiser .....	171
11.6.119 Package Item .....	172
11.6.120 Participant .....	173
11.6.121 Participation Requirement .....	174
11.6.122 Part Metadata .....	175
11.6.123 Person Details .....	177
11.6.124 Phone Number .....	178
11.6.125 POI Details .....	179
11.6.126 Postal Address .....	180
11.6.127 Postal Code .....	181
11.6.128 Priority .....	182
11.6.129 Profile .....	183
11.6.130 Property Value Name .....	184
11.6.131 Publish Status .....	185
11.6.132 Recurrence Date .....	186
11.6.133 Recurrence Rule .....	187
11.6.134 Registration .....	188
11.6.135 Related Concept .....	189
11.6.136 Remote Catalog Reference .....	190
11.6.137 Remote Content (NewsML-G2 Specific) .....	191
11.6.138 Remote Information about a Concept .....	194
11.6.139 Rights Information .....	195
11.6.140 Role in the Content Stream .....	196
11.6.141 Role in the Workflow .....	197
11.6.142 Ruby .....	198
11.6.143 Ruby Base .....	199
11.6.144 Ruby Parenthesis .....	200
11.6.145 Ruby Text .....	201
11.6.146 Same As .....	202
11.6.147 Scheduled .....	203
11.6.148 Scheme Declaration .....	204
11.6.149 Sender .....	205
11.6.150 Signal .....	206
11.6.151 Slugline .....	207
11.6.152 Span .....	208
11.6.153 Start Date/Time .....	209
11.6.154 Subject .....	210
11.6.155 Time Delimiter .....	211
11.6.156 Timestamp .....	213
11.6.157 Transmission Identifier .....	214
11.6.158 Type of a Concept .....	215
11.6.159 Urgency .....	216
11.6.160 Usage Terms .....	217
11.6.161 Visual Region Delimiter .....	218
11.6.162 Web Address .....	219



11.7 Element Group Definitions .....	220
11.7.1 Concept Definition Group .....	220
11.7.2 Concept Relationships Group .....	220
11.7.3 Entity Details Group .....	220
11.7.4 Administrative Metadata Group .....	221
11.7.5 Knowledge Descriptive Metadata Group .....	221
11.7.6 Descriptive Metadata Group .....	221
11.7.7 Item Management Group .....	222
11.8 Datatype Definitions .....	223
11.8.1 Any Item Type .....	223
11.8.2 Approximate Date and Time Property Type .....	224
11.8.3 Audience Type .....	225
11.8.4 Block Type .....	226
11.8.5 Concept Identifier Type .....	227
11.8.6 Content Metadata Type .....	228
11.8.7 Date and Optional Time Property Type .....	229
11.8.8 Date and Optional Time Type .....	230
11.8.9 Date and Time or Null Value Property Type .....	231
11.8.10 Date and Time Property Type .....	232
11.8.11 Electronic Address Type .....	233
11.8.12 Electronic Address Tech Type .....	234
11.8.13 Flexible 1 Concept Property Type .....	235
11.8.14 Flexible 1 Party Property Type .....	236
11.8.15 Flexible 1 Property Type .....	237
11.8.16 Flexible Location Property Type .....	238
11.8.17 Flexible Organisation Property Type .....	239
11.8.18 Flexible Party Property Type .....	240
11.8.19 Flex Person Property Type .....	241
11.8.20 Flexible Property Type .....	242
11.8.21 Integer 0 to 100 Type .....	243
11.8.22 Integer 1 to 9 Type .....	244
11.8.23 International String Type .....	245
11.8.24 IRI Type .....	246
11.8.25 Label 1 Type .....	247
11.8.26 Link 1 Type .....	248
11.8.27 QCode List Type .....	250
11.8.28 QCode Property Type .....	251
11.8.29 QCode Type .....	252
11.8.30 Qualified Property Type .....	253
11.8.31 Recurrence Rule Type .....	254
11.8.32 Related Concept Type .....	255
11.8.33 Rights Label Type .....	256
11.8.34 Truncated Date and Time Property Type .....	257
11.8.35 Truncated Date and Time Type .....	258
11.8.36 Typed Qualified Property Type .....	259
11.8.37 Versioned String Type .....	260
11.9 Attribute Group Definitions .....	261
11.9.1 Internationalization Attributes Group .....	261
11.9.2 Editing Attributes Group .....	261
11.9.3 Time Validity Attributes Group .....	261
11.9.4 Ranking Attributes Group .....	262
11.9.5 Quantify Attributes Group .....	263
11.9.6 News Content Attributes .....	263
11.9.7 Target Resource Attributes Group .....	264
11.9.8 News Content Characteristics .....	264
12 Glossary .....	268



13 References .....	271
14 Index .....	272
14.1 Elements .....	272
14.2 Datatypes .....	274



# 1 Introduction to EventsML-G2

EventsML-G2 specifications are a member of the Family of IPTC G2-Standards which is built on a common structural and function framework called the IPTC News Architecture (NAR). For this reason many components of EventsML-G2 are common with other members of the G2-Standards, e.g. NewsML-G2.

To better understand the terminology the IPTC used for the G2-Standards specification we recommend the **Glossary** (page 268) as reference, as it provides an extensive set of terms and their definitions.

## 1.1 Overview

### 1.1.1 What is EventsML-G2?

- ◆ EventsML-G2 is a standard for conveying event information in a news industry environment.
- ◆ EventsML-G2 is a member of the Family of IPTC G2-Standards, this family shares a lot of common specifications (the IPTC “News Architecture - NAR”) for the exchange of news items and knowledge about topics and concepts.
- ◆ EventsML-G2 may be used for:
  - Receiving all facts about an event from the event organiser,
  - Publishing all facts about a specific event by a news provider,
  - Publishing all or only a subset of the facts of one to many events by event listings,
  - Adding information regarding the coverage of an event by a news provider to the distributed event facts, e.g. for daybooks,
  - Storing facts about knowledgeable events in archives.

### 1.1.2 Business Advantages of Using EventsML-G2

EventsML-G2 are:

- ◆ Comprehensive (= many types of events may be covered).
- ◆ Flexible (= copies of substructures may be used many times, e.g. all the people appearing at an event).
- ◆ Extensible (= news provider specific data may be added) data structure to capture facts about events.

EventsML-G2 may express facts and information about events by concepts identified either by literal text (free text) or by codes from controlled vocabularies.

EventsML-G2 provides very flexible date types:

- ◆ year, month, day, optionally plus time
- ◆ year and month only or even year only
- ◆ approximative dates = a date range

EventsML-G2 reuses building blocks from the common News Architecture allowing to reuse software components, making their implementation cheaper.

EventsML-G2 makes use of industry standards: allows processing with standard tools. The EventsML-G2 syntax is built on XML, the Extensible Markup Language of the W3C, furthermore, EventsML-G2 makes use of W3C XML Schema and complies with the basic notion of the Semantic Web, the Resource Description Framework (RDF). This allows an easy transfer of EventsML-G2 structures to other XML-based standards and the integration of information about an event into the Semantic Web.

### 1.1.3 What is an Event – to be represented by EventsML-G2

An event is “something that happens” by definition. For the news industry, it is “something that happens and is subject to news coverage.” All the events in a day make up an “agenda,” which can be a marketable product sold to clients or simply an internal daybook used by editors to organise their work.



An event is planned or unplanned, with breaking news capable of overshadowing everything on the schedule.

Breaking news can generate a series of planned events; it becomes part of the daily news agenda the moment a decision is made to cover it. For agencies, this occurs with the first advisory announcing plans to provide coverage. For broadcasters it comes with the dispatch of a news team to the site; for newspapers it is when space is reserved for the story or page makeups rearranged.

Automated systems need to store and exchange information about news events. This is currently done in an ad-hoc manner, leading to overly-specialized formats and incompatible exchange by models. From that the IPTC learned that the industry would benefit from an event information interchange standard. Such a standard would facilitate the efficient exchange of event information, and the creation of better tools to support event management.

## 1.2 Definitions

### 1.2.1 Event Information

The event information describes a particular event in detail. This includes the “who”, “what”, “when”, and “where” information for the event along with identification and publication (news management) information. The event information also includes facilities for relating events to each other and relating news items (both complete and incomplete) to the event information.

### 1.2.2 Coverage Information

The coverage information describes the plan of news coverage for this event. Each event may have zero or more assignments containing this coverage information. This information can be used internally within a news organisation for assignment of resources, planning of coverage, etc. It can also be used to publish information about expected coverage, so that consumers of the news coverage can plan their own news coverage accordingly.

### 1.2.3 The Data Model

The data model for EventsML-G2 has to cover two different facets of event information which relate to a basic distinction made for all G2 standards:

- ◆ Topical News: is typically volatile information in the sense of “nothing is older than yesterday's news”.
- ◆ Persisting Knowledge: is information which is remembered and referenced to for a long time.

For EventsML-G2 this is reflected by two different data models:

- ◆ Volatile information about an event is represented by an “event” structure which is plugged into a NewsML-G2 news item as its content. A single news item may include one to many event structures. This kind of event information cannot be referenced as persisting information from any other item. Find details about this data model in section [Events in a NewsItem](#) (page 18).
- ◆ Persistent information about an event is represented by an EventsML-G2-Concept Item which is a generic NAR structure for concepts extended by a set of detailed information specific to an event. As any other kind of a Concept Item also this specific one for events can be referenced by its Concept Identifier.

The same applies to KnowledgeItems: a variant with event specific extensions is available, in particular event details are added to the concept structure inside the KnowledgeItem. KnowledgeItems may be used to exchange a set of event information if it should be distributed with a concept identifier.

Find details about this data model in section [An Event in a Concept Item or Many Events in a Knowledge Item](#) (page 19).

The most important thing to note about the EventsML-G2 data model is that the core structures holding information about an event are identical for both the content plugged into a News Item and the extension of a Concept Item. Hence it is very easy to build a single EventsML-G2 processor for topical and persisting information about an event.



### 1.3 Conformance Levels

Another feature EventsML-G2 inherits from the NAR are the two conformance levels “Core” and “Power”. Different conformance levels are defined in the model, each of them related to a level of complexity (at the conceptual and processing level) of the related Items. This feature adds modularity to the model.

The current model defines two conformance levels named “core conformance level” (CCL) and “power conformance level” (PCL). The core conformance level is focused on simplicity and interoperability. The power conformance level is a superset of the core conformance level which gives more flexibility to providers who choose it, but the recipient processors are more complex to program to comply with PCL and interoperability is lower than for CCL as not all recipients will implemented the power level.

A compliant processor must therefore assert supporting either “core” or “power” functionality.

As the “power” features are only an extension of the “core” features, a “core” compliant processor SHOULD process “power” Items by simply ignoring the information pertaining to the “power” level.

EventsML-G2 specifies does not specify in its own scope data structures which are different for the two conformance levels, but it inherits specifications of datatypes of properties and attributes from the NAR which are different at the two conformance levels. The data types corresponding to the conformance level are defined in the specification tables in the [Specification Reference](#) (page 48).

### 1.4 EventsML-G2 and iCalendar

A well known and widely used standard for events data is “iCalendar” which is specified by RFC 2445.

EventsML-G2 compares very well to it as it covers virtually all features of an iCalendar Event Component:

Table 1. iCalendar-to-EventsML-G2 Component Mapping

iCalendar Event Component (Alphabetically)	Corresponding EventsML-G2 Component
attach	“link” property of a G2-item
attendee	“participant” property
categories	“subject” property
class	Access management functionality, no direct equivalence in EventsML-G2
comment	“note” property (under “event” for news and “concept” for a concept)
contact	“contactInfo” property (under eventDetails)
created	“contentCreated” property (in contentMeta) of a G2-item for news or a concept.
description	“definition” property (under “event” for news and “concept” for a concept)
dtend	“end” property (under eventDetails/dates)
dtstamp	“contentCreated” property (in contentMeta) of a G2-item for news or a concept.
dtstart	“start” property (under eventDetails/dates)
duration	“duration” property (under eventDetails/dates)
exdate	“exDate” property (under eventDetails/dates)
exrule	“exRule” property (under eventDetails/dates)
geo	“position” property (under eventDetails/location/geoAreaDetails)



Table 1. iCalendar-to-EventsML-G2 Component Mapping (Continued)

iCalendar Event Component (Alphabetically)	Corresponding EventsML-G2 Component
last-mod	“contentModified” property (in contentMeta) of a G2-item for news or a concept.
location	“location” property (under eventDetails)
organizer	“organiser” property (under eventDetails)
priority	As this iCalendar property reflects the priority for a calendar of an individual no equivalent exists in EventsML-G2.
rdate	“rDate” property (under eventDetails/dates)
recurid	No direct equivalence in EventsML-G2, assigned functionality may be replicated by G2-item means.
related	No direct equivalence, but relationships can be expressed by other G2-item means
resources	Not covered by EventsML-G2 1.0, planned for future versions.
rrule	“rRule” property (under eventDetails/dates)
rstatus	Scheduling protocol functionality is not covered by EventsML-G2
seq	“version” attribute of the G2-item's root element
status	“confirmation” (under eventDetails/dates) reflects the status of confirmation of the dates of the event, while “occurStatus” (under eventDetails) reflects the overall status of the event.
summary	“name” property (under “event” for news and “concept” for a concept)
transp	Not covered by EventsML-G2
uid	“guid” attribute of the G2-item's root element
url	No direct equivalence. For G2-items it may be defined individually by each news provider how to resolve the identifier of an G2-item to an accessible location.
x-prop	EventsML-G2 provides “Extension points” for this purpose.





## 2 Events

### 2.1 The Core Information about Events

Regardless whether the information about an event is topical or persistent (see [The Data Model](#) on page 14) the same structure is used to mark it up.

The information about an event includes, first a set of more generic properties:

- ◆ A natural language **name** (page 76) for the event. This name should be rather concise and could be expressed in different languages.
- ◆ A natural language **definition** (page 73) for the event and it could be more extensive than the name, it could explain facets in detail. It can also be expressed in different languages.

The *role* attribute of a definition could be used to provide variants of an explanation, e.g. a short one for overviews and a rather extensive one for a detailed presentation.

- ◆ A natural language **note** (page 165) about the event. This could be an explanation of details or background information regarding the definition. Again this note can be expressed in different languages and can be qualified by a *role* attribute.
- ◆ A **facet** (page 121) property to further qualify the nature of the event. The facet can take either literal values or values from a controlled vocabulary and could be used to express e.g. that this event is a concert, a hockey game or a press conference.
- ◆ The properties **sameAs** (page 202), **broader** (page 65), **narrower** (page 160) and **related** (page 189) can be used to define a relationship with this event to another event or concept.

In particular broader may be used to express that this event is a sub-event to another event, e.g. a break-out session of a big conference, one competition of the Olympic Games or one of the concerts of a festival.

Then a set of rather event-specific properties - wrapped by the **eventDetails** (page 115) property:

- ◆ A **dates** (page 105) sub-structure to express the start date and the end date or duration of the event. This includes using the “approximative dates”, i.e. a range of dates, and on date in this range as a kind of best guess or most likely date.

If this event is recurring this can be expressed by means of recurrence properties which align to equivalent properties of the iCalendar standard RFC 2445 (see more below).

- ◆ An **occurStatus** (page 167) to indicate the status of the occurrence - if this is a unplanned or planned event, and if it is planned how likely it is to occur.
- ◆ A set of **registration** (page 188) information which may be used to define how persons have register for the event, this may include the accreditation of journalists.
- ◆ A set of **accessStatus** (page 52) information.
- ◆ A set of **participationRequirement** (page 174) properties. This could be used e.g. for expressing age limits - think of required parental guidance for movies - or for formal requirements for training course events.
- ◆ A set of **subject** (page 210) properties to express what the event is about. Be aware of the difference between a facet and a subject: a facet should indicate the nature of the event, what the event is, while a subject indicates applicable categories for what the event is about. For example, “concert” is a facet, while “music” or “Wolfgang Amadeus Mozart” is a matching subject.
- ◆ A set of **location** (page 156) properties. In most cases it will be the only location of where the event will take place - but e.g. festivals could have more than one location.
- ◆ A set of **participant** (page 173) properties to list all kinds of parties appearing in different roles at the event - the particular role can be expressed by the *role* attribute.



- ◆ A set of **organiser** (page 171) properties to list all parties involved in organising the event - the particular role can be expressed again by the *role* attribute
- ◆ A set of **contactInfo** (page 79) properties for the event. Be aware that the location, the participant and the organiser properties may contain contactInfo structures, but they pertain only to this particular property while this contactInfo is to be used for the event as a whole.
- ◆ A set of **language** (page 151) properties to reflect all languages which will be spoken at the event.
- ◆ A set of **newsCoverage** (page 161) properties. They can provide all necessary information about the planned coverage for this event by a news provider. To express this planned coverage either a free-text property **edNote** (page 110) may be used or at the PCL a rich set of details about the G2 items which are planned to cover this event including the projected time and service of their distribution. Further provider specific properties may be added.
- ◆ As for many wrapping elements in G2-Standards, the information about an event can also be extended by provider-specific properties.

## 2.2 Event Information in Items

### 2.2.1 Identification and Versioning of Items

It is possible to positively identify any kind of an item specified by the G2-Standards as it moves through the news workflow, and is transferred from place to place and from system to system.

Each and every item – including News Items, Concept Items, Knowledge Items and Package Items – MUST have a *guid* attribute, that is a persistent and globally unique identifier. The guid is required to be in the form of an IRI. Any IRI capable of acting as a globally unique identifier is accepted.

Note: the IPTC will provide the newsmml-URN for this purpose, specified by a successor of RFC-3085.

A newsItem MAY have a *version* attribute, and this version MUST be incremented when the content of the Item is updated. The first version MUST be numbered 1: if the version is not explicitly set, the value "1" must be assumed as default by the recipient of the Item.

The *standard* attribute must reflect the G2-Standard which governs the structure:

- ◆ For topical events in a News Item this is NewsML-G2.
- ◆ For persisting information about an event in a Concept Item this is EventsML-G2.

The *standardversion* attribute must reflect the version of the standard as it is implemented by the corresponding XML Schema.

Samples:

```
<newsItem standard="NewsML-G2" standardversion="2.0"
  guid="urn:newsmml:iptc.org:20071231:newssample" version="2"
  xmlns="http://iptc.org/std/nar/2006-10-01/" >
</newsItem>


<conceptItem standard="EventsML-G2" standardversion="1.0"
  guid="urn:newsmml:iptc.org:20071231:eventsample" version="4"
  xmlns="http://iptc.org/std/nar/2006-10-01/" >
</conceptItem>
```

### 2.2.2 Events in a NewsItem

Topical event information must be conveyed by using the NewsML-G2 NewsItem (see **Representing News - newsItem** on page 22) as a wrapping item instance. The structure of a NewsItem defines a special node where to attach content plug-ins, the inlineXML element.

For EventsML-G2 an **Events Wrapper** (page 117) element will be added as child to **Inline XML (NewsML-G2 Specific)** (page 139) and it acts as a wrapper of one-to-many **Event** (page 114) elements, each representing the topical information of a single event.

Figure 1. Event Information in a News Item

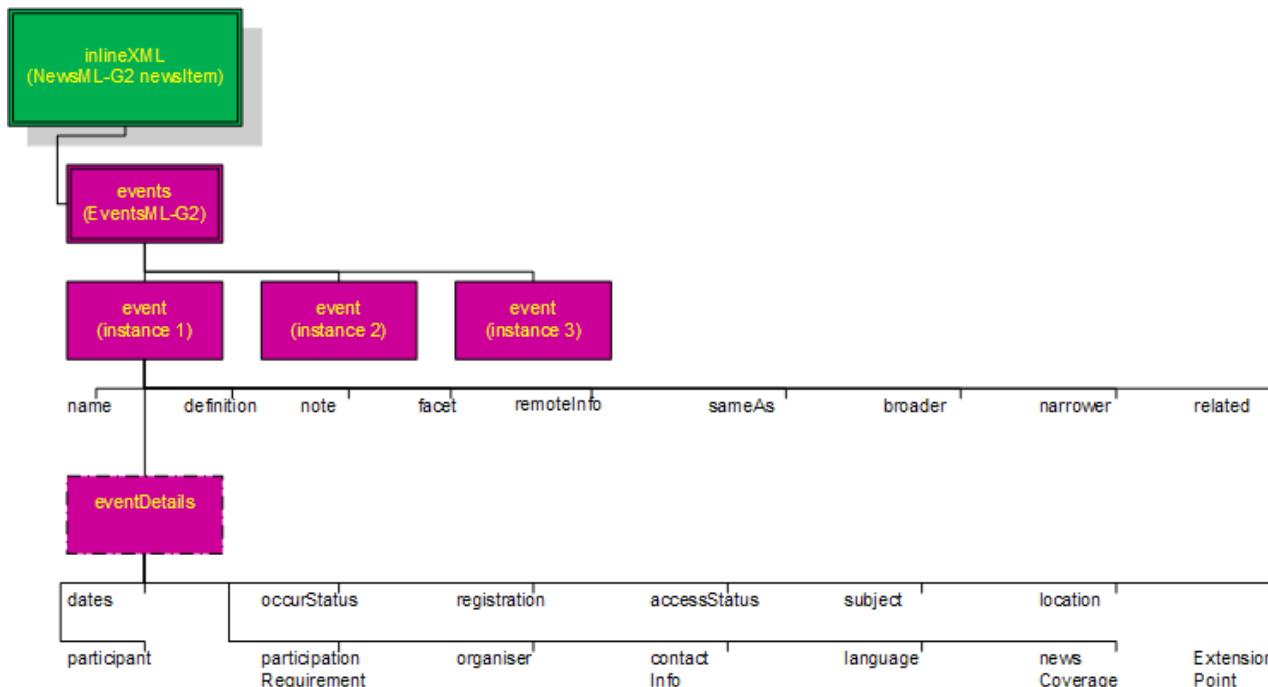

The event element wraps a group of more generic descriptions and a couple of details about an event. The first group is made of a short name which can be displayed as a one-liner, a more comprehensive definition of the event and a note with supplemental information.

A sibling to this group is eventsDetails, it wraps all the details of the event, when and where it happens, who is involved and how to get there.

Finally optional information about the planned news coverage of this item may be added.

### 2.2.2.1 News Metadata

In general the News Metadata section of a NewsItem - wrapped by the **Content Metadata for News Items** (page 82) element - should be populated and used as specified for NewsML-G2.

Further to this general recommendation these event specific considerations apply:

- ◆ If more than a single event is conveyed by a NewsItem the content metadata apply to the set of events as a whole. In most cases this set will be selected from a larger repository by some rules, like “events of next week”, or “music events”. This could be reflected by e.g. the headline, the description or even the subject property.
- ◆ Genre property: an appropriate value should be applied, like “almanac” or “daybook” from the IPTC Genre NewsCodes
- ◆ Language property: be aware of the difference between the language property of the content metadata - it reflects the languages used in the content, in this case in the description of the events - and the language property of the event structure - it reflects a language which is used at an event.

### 2.2.3 An Event in a Concept Item or Many Events in a Knowledge Item

The persisting knowledge facet of event information is represented by the EventsML-G2 Concept Item, an extended variant of the generic G2 Concept Item (see **Managing Individual Concepts - conceptItem** on page 36), and subsequently the EventsML-G2 Knowledge Item, an extended variant of the generic G2 Knowledge Item (see **Managing Sets of Concepts - knowledgeItem** on page 37).

Any Concept Item or Knowledge Item provides a group of generic definitions and a set of details specific to a kind of concept, in this case specific to an event.


Generic definitions are part of the basic Concept Item or Knowledge Item and include:

- ◆ The Concept Identifier for this event.
- ◆ Relationships to other events.
- ◆ A name, a definition, explanatory notes and refining facets.

Find more about the generic part in section **Representing Concept Information - concept Component** (page 34).

In EventsML-G2 Concept Items the value of the type of a concept (conceptItem/concept/type) must be set to concept URI of <http://cv.iptc.org/newscodes/cpnature/event> which may translate to a QCode of cpnat:event.

Figure 2. Event Information in a concept element

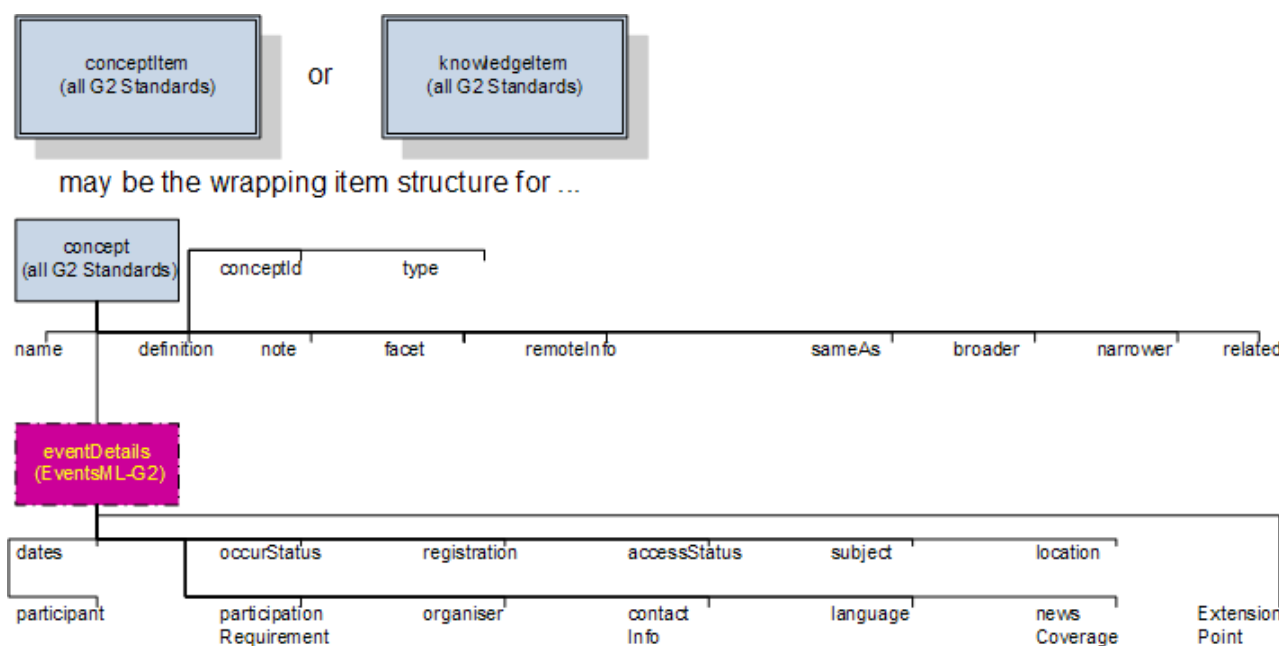

The event specific details are expressed by an eventDetails structure plugged into the “concept” of a Concept Item or a Knowledge Item. The eventDetails used there are completely identical to the structure with the same name used for the “event” element in the content set of a News Item.

The Concept Identifier of an event may be used by other items (either News Items or Concept Items) to reference this event. On a purely technical level this Concept Identifier can be used for any “qcode” qualifier of a property. On a semantic level the only prerequisite are reasonable semantics of the property to reference an event – e.g. a property not limited to persons or locations by its semantics.

Examples are:

- ◆ Using an event's Concept Identifier as QCode for the “subject” property of a News Item. This indicates that the content of the News Item is about this event, the News Item's content may be a text, a photo, audio or video covering the event.
- ◆ Using an event's Concept Identifier with the **Same As** (page 202), **Broader** (page 65), **Narrower** (page 160) and **Related Concept** (page 189) properties of another Concept Item. By these means a structure or network of events can be created, e.g. to link individual performances with a cultural festival or different talks to a conference.



Knowledge Items with event concepts should be used to distribute event information if this information is planned to be updated - as this requires an identifier for each event.

A provider could think of this use case scenario: he circulates a "top events of the next weekend" Knowledge Item with event concepts on Monday. On Wednesday he sends a new version of this Knowledge Item with updated events, and events that have been cancelled will be removed from the Knowledge Item.



### 3 Representing News - newsItem

An XML Schema file corresponding to the specifications for this item is available (see [The Full Set of Specification Documents](#) on page 3).

#### 3.1 Description

A newsItem aims to convey news with the sense of the reporting of a newsworthy event or fact. Its content is gathered by journalists, presented with a journalistic style, and updated according to the progression of the story.

Examples of newsItems are a news report, a picture, a graphical illustration of some event, a video clip or an illustrated biography.

Typical characteristics of a newsItem are:

- ◆ Its content may be of any media type or format, e.g., the thumbnail, preview and high definition renditions of a picture.
- ◆ It can also convey more structured news information, e.g., information about companies, sports events and general events, in instances when this information is related to an event or fact.
- ◆ Its content is of short term interest: newsItems are volatile, and interest in them fades as time passes (“nothing is older than yesterday’s news”).
- ◆ It is expressed via a set of alternative renditions of some media content.
- ◆ It will usually be updated only for a short period of time, as long as the covered event evolves, and then may be archived.
- ◆ It refers to an arbitrary set of concepts and entities.
- ◆ It may be associated with other newsItems or Web resources via typed links.

#### 3.2 Indication of Compliance with a Standard and Conformance Level

The IPTC **newsItem** (page 163) *standard* attribute MUST be set to “NewsML-G2”.

The schema version to which the newsItem conforms MUST be indicated as an attribute. The current version is identified by the string “2.0”.

The IPTC conformance level to which the newsItem conforms in this specification MUST be indicated by the value “power”.

Sample:

```
<newsItem standard="NewsML-G2" standardversion="2.0"
  xmlns="http://iptc.org/std/nar/2006-10-01/" >
</newsItem>
```

#### 3.3 Identification and Versioning

It is possible to positively identify a newsItem as it moves through the news workflow and is transferred from place to place and from system to system.

A newsItem MUST have a *guid* attribute, which is a persistent and globally unique identifier. The guid is required to be in the form of an IRI. Any IRI capable of acting as a globally unique identifier is accepted.

**Note:** The IPTC will provide the newsml-URN for this purpose, specified by a successor of RFC-3085.

A newsItem MAY have a *version* attribute, and this version MUST be incremented when the content of the Item is updated. The first version MUST be numbered 1: if the version is not explicitly set, this value must be assumed by the recipient of the Item.

The *standardversion* attribute must reflect the version of the standard as it is implemented by the corresponding XML Schema.



Sample:

```
<newsItem standard="NewsML-G2" standardversion="2.0"
  guid="urn:newsml:iptc.org:20071231:sample" version="2"
  xmlns="http://iptc.org/std/nar/2006-10-01/" >
</newsItem>
```

### 3.4 Catalog of Controlled Vocabularies

NewsML-G2 recommends the use of controlled values for most properties. Each news provider is free to use their own taxonomies of subjects, genres, geopolitical areas, organisations etc., and to use any value scheme it decides in the Items it provides. A provider must therefore indicate the list of the schemes he is using.

Cataloguing information **MUST** be included at the top of each Item.

A **catalog** (page 68) is defined as a set of scheme declarations in use by a news provider for a given Item.

Due to the large number of schemes potentially used in a single Item, and knowing that bandwidth is very important to the News industry, the catalog may be stored remotely (see **catalogRef** on page 190).

A remote catalog **MUST** have a *href* attribute which contains the URI of a remote catalog. A remote catalog takes the form of an XML file with a catalog element as root.

The URI of a remote catalog acts both as a locator and a global identifier, therefore:

- ◆ The URI of a remote catalog **MUST NOT** be relative.
- ◆ If a remote catalog is functionally changed, the URI used to access it **MUST** be changed. Functional changes are:
  - the addition or removal of a scheme declaration,
  - a change to a scheme alias,
  - a change to a scheme URI.

One or more additional title for a catalog or catalogRef **MAY** be provided in different languages and variants.

As some required properties take a QCode as a value, at least one catalog or remoteCatalog **MUST** be present.

In general, a given provider will define a unique catalog of all used schemes, store it in a central repository and reference it from all Items it provides. A provider **MAY** declare several catalogs in the same Item. This may be especially useful for an aggregator which uses property values from different sources, but requires a way to avoid scheme alias clashes. In this case, catalog and remote catalog elements **MAY** appear in any order, and their order is not relevant.

Detailed information on the structure of catalogs and their processing is given in **Dealing with Controlled Values** (page 40).

Sample:

```
<newsItem standard="NewsML-G2" standardversion="2.0"
  guid="urn:newsml:iptc.org:20071231:sample" version="2" xmlns="http://
  iptc.org/std/nar/2006-10-01/" >
  <catalogRef href="http://aprovider.com/cv/newsml-g2-catalog-4.xml" />
  . . . .
</newsItem>
```



### 3.5 Signature Information

A digital signature may be associated with a whole Item or only parts of it. For example, it is possible to sign each individual news content component of a newsItem using their local identifiers as a local reference.

A digital signature is a unique seal placed on data. It is very difficult to forge and assures that any change made to the signed data cannot go undetected.

This specification supports the model and syntax defined by the W3C in [XMLDSIG], and introduced by the following: “XML Signatures provide integrity, message authentication, and/or signer authentication services for data of any type, whether located within the XML that includes the signature or elsewhere”.

This specification model excludes two functionalities defined by the W3C XML-Signature Processing Recommendation. These are: “Signed content included within an XML Signature Construct” and “Detached Signatures”.

Therefore this specification offers the following features:

- ◆ A Signature **MUST** be “enveloped” (the Signature Component is contained within the Item being signed).
- ◆ A Signature **MUST** sign the Item containing the Signature component or child components of the Item containing the Signature.
- ◆ The Signature **MUST NOT** be “enveloping” (it cannot sign content found within the signature itself).
- ◆ A Signature **MUST NOT** be “detached” (a detached Signature Component would not be contained within the Item being signed and could be external to the containing document).
- ◆ A Signature **MUST NOT** be related to Items and Components external to the enclosing document (via references).

### 3.6 Rights Information

The content of a newsItem is bound to a set of copyrights and licensing information.

A **rightsInfo** (page 195) wrapper element acts as a container for a set of properties related to rights, which offer a basic expression of the copyright and usage conditions associated with an Item.

This set is limited to an **accountable** (page 53) person, a **copyrightHolder** (page 88) and a set of **copyrightNotice** (page 89) elements and **usageTerms** (page 217).

The order of the properties is flexible: The non-repeatable properties **MUST** come first, then the repeatable properties **MAY** be inserted in any order.

The expression of rights can be verbose, and the volume of information exchanged or stored may suffer from the repetition of such information. Therefore each property provides an *href* attribute as an alternative locator of a remote expression of rights. In the case where both inline and remote expression of rights is indicated, the inline expression **MUST** take precedence.

In some situations, different parts of the content are associated with different sets of rights; the rightsInfo element is therefore repeatable.

Each set of rights provides an optional reference attribute (*idrefs*) which indicates which part of content is bound to these rights. This can be achieved by referencing the id of a content component of an item, i.e. inlineXML, inlineData and remoteContent for a News Item, and concept for a Knowledge Item. The *idrefs* attribute **MAY** reference more than one component.

A same piece of content **MAY** have different set of rights associated with it; in this case the union of the rights applies to this content. In case of a logical clash, the recipient **SHOULD** consider it as an error and check with the provider.

The rightsInfo element also provides optional time validity attributes (*validfrom* and *validto*) which express the date and time between which the set of rights properties apply.





Each provider may add a set of metadata properties which have to be defined in a non-IPTC-G2 namespace. See also [XML Namespaces](#) (page 48) and [Extension Points in XML](#) (page 49).

### 3.7 Item Metadata

Such information is wrapped in the itemMeta wrapper element and split between news management metadata and Item links.

#### 3.7.1 Management Metadata

Management metadata is bound to the Item as a whole and reflects its processing in a professional workflow.

The order of the properties in this set is imposed by the W3C XML schema.

Table 2. Item Management Group Elements

Element Title	Element Name	Card	Described on Page
Item Class	<a href="#">itemClass</a>	(1)	144
Content Provider	<a href="#">provider</a>	(1)	85
Date Item Version Created	<a href="#">versionCreated</a>	(1)	98
Date Item First Created	<a href="#">firstCreated</a>	(0..1)	97
Date Item Embargo Ends	<a href="#">embargoed</a>	(0..1)	96
Publish Status	<a href="#">pubStatus</a>	(0..1)	185
Role in the Workflow	<a href="#">role</a>	(0..1)	197
File Name	<a href="#">filename</a>	(0..1)	123
Generator Tool	<a href="#">generator</a>	(0..1)	126
Profile	<a href="#">profile</a>	(0..1)	183
Editorial Service	<a href="#">service</a>	(0..unbounded)	111
Item Title	<a href="#">title</a>	(0..unbounded)	148
Editorial Note	<a href="#">edNote</a>	(0..unbounded)	110
Member Of	<a href="#">memberOf</a>	(0..unbounded)	158
Instance Of	<a href="#">instanceOf</a>	(0..unbounded)	141
Signal	<a href="#">signal</a>	(0..unbounded)	206
Alternative Representation	<a href="#">altRep</a>	(0..unbounded)	58

The IPTC provides a mandatory standardised scheme applicable to the [itemClass](#) (page 144) property of a newsItem, identified by the URI <http://cv.iptc.org/newscodes/ninature/>.

Each provider may add a set of metadata properties which have to be defined in a non-IPTC-G2 namespace. See also [XML Namespaces](#) (page 48) and [Extension Points in XML](#) (page 49).

#### 3.7.2 Processing the Publish Status of an Item

The IPTC makes these values normative for the exchange of Items between a provider and its customers:

- ◆ Usable: The Item MAY be published without restriction.
- ◆ Withheld: Until further notice, the Item MUST NOT be published or used under any circumstances. If the Item has been published the publisher MUST take immediate action to withdraw or retract it.
- ◆ Canceled: The Item MUST NOT be published or used under any circumstances. If the Item has been published the publisher MUST take immediate action to withdraw or retract it.


Embargoes are managed by the [embargoed](#) (page 96) property. At the level of the data model the embargoed element could be linked now to an [edNote](#) (page 110) element if the existing embargoed is empty (<embargoed />).

Details are described in the Processing model below

### 3.7.2.1 State Transition Diagram

This depicts the state transition diagram reflecting the ways in which the **pubStatus** (page 185) values are intended to be used. Thus, upon creation of an Item, allowed statuses are usable and withheld. It is possible to withhold a usable document; it is possible to release a withheld document; it is possible to cancel a usable or withheld document. Once an Item has had its status set to canceled, it has reached a final state.

Figure 3. State Transition Diagram

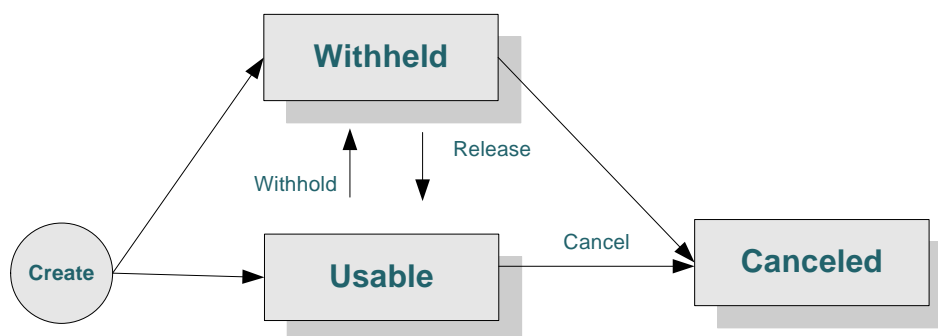

### 3.7.2.2 Use Cases Associated with a Status of Withheld

Use Case 1: A provider distributes a story as a newsletter (version 1) with the status usable. At a later stage he learns that there may be a problem with the information included in the Item. He sends a new version of the newsletter (version 2) with a status set to withheld. All recipients systems must display a warning on this newsletter, and recipient publishers must postpone the publication of the information contained in the newsletter until further notice. The news provider has confirmation that the information is false and decides to set the status to canceled (version 3).

Use Case 2: An eCommerce system proposes a large collection of illustrated articles managed as news items. The publisher managing the system sees that the information included in a newsletter (version 1) is not up to date anymore, and decides to hide this Item from its customers until it is properly revised. He set then its status to withheld (version 2), edits the newsletter and set its status back to usable (version 3).

### 3.7.2.3 Processing Model on the Recipient Side

Here is the processing model on the recipient side and relies on the **pubStatus** (page 185) and embargoed properties:

```
Test pubStatus = canceled:
    The Item must not be used, ever. Any usage of the Item must be prohibited, if needed by the way of alerts.
    Else: next
Test pubStatus = withheld:
    The Item must not be used until further notice. Any usage of the Item must be prohibited, if needed by the way of alerts.
    Else: next
Test pubStatus = usable:
    Test embargoed as described in Table 3.
```

Table 3. Test `pubStatus = Usable`

<embargoed>	<pubStatus>	How to Process
Element is absent.	Usable	Item is usable and not embargoed.
Element exists, provides a Date/Time value.	Usable	The embargo on the item ends at the given date and time.
Element exists, but is empty. Corresponding <code>edNote</code> exists.	Usable	The item is embargoed as long as a condition applies which is described in an editorial note. The <code>edNote</code> should be formulated like this: <edNote @role="noteRole:embargo">Until end of speech</edNote>
Element exists, but is empty. No corresponding <code>edNote</code> exists.	Usable	The item is embargoed indefinitely. This may be overridden by a contractual agreement between the provider and the client.

### 3.7.3 Processing of `versionCreated`

If the value provided by any date/time field does not conform to the appropriate syntax (e.g. format "YYYY-MM-DDTHH:MM:SS[+-]HH:MM:SS") it MUST be considered as being not existent.

In the case of the mandatory `versionCreated` (page 98) property the full Item MUST be considered as being void.

## 3.8 Item Links

A powerful feature of NewsML-G2 is the capability to associate Items via links. It is therefore possible to create a network of news resources, for management and navigation purposes.

The `link` (page 153) element offers a generic mechanism for linking Items within the NAR framework as well as creating links from Items to other Web resources.

The semantic of the link MAY be refined via a relationship attribute (`rel`). In the absence of such indicator, the implied meaning of the link is "see also" (i.e. a navigation link).

The IPTC provides a recommended scheme of link relationships identified by the URI <http://cv.iptc.org/newscodes/itemrelation/>.

To identify the target resource either the `residref` attribute or the `href` attribute MUST be set, optionally both MAY be used in parallel. The `residref` attribute identifies the target resource by its globally unique identifier (if the resource has such an identifier), while the `href` attribute identifies the location of the target resource in e.g. a (remote) file system. If the target resource is an Item and the `residref` attribute is used, a `version` attribute MAY indicate the target Item version; in the absence of version information, the target resource is the latest version available.

The content type, a.k.a. IANA MIME type of the target resource MAY be indicated by the `contenttype` attribute. It MAY be complemented by a `format` attribute to refine the MIME type information.

In order to ease the processing of a linked resource, the size in bytes of the target resource MAY be indicated. This feature is useful if the target on the link is a Web resource. If the target resource is an Item, the size which is given here MUST be the size of the XML representation of the Item.

A `rank` attribute may represent the rank of the link among other links.

This property also provides `timeValidityAttributes` (page 261) (`validfrom` and `validto`) which express the date and time between which the link is valid.

Supplemental metadata extracted from the target resource (usually an Item) may be added to the linking information as child elements. Such information is not constrained by the data model. It may be part of the target Item Metadata (e.g. Publish Status, Alternative Location ...), Content Metadata (e.g. Intended



Audience, Subject, Genre ...) or Characteristics of the content (e.g. Size, Content Type, Format, or specific characteristics like the Height and Width of a picture). Different sets of characteristics may be provided, corresponding to specialized content components.

All properties SHOULD be included directly under the [link](#) (page 153) property (see the details for this inclusion in the [link](#) specification table for the "Hint and Extension Point" child elements).

### 3.8.1 Processing Links

Link processing rules:

Link.1: Processor on the consumer side: If a *guid* and a *version* are provided, check whether the specific version of the Item is accessible using this information.

Processor on the provider side: If a *guid* and a *version* are provided deliver only the item version with the requested version number.

Link.2: Processor on the consumer side: If only a *guid* is available and no *version*, check whether an item is delivered by the provider. Consider a delivered version of the item as being the latest one.

Processor on the provider side: if only a *guid* is requested and not *version*, check if any version of the item exists, and if yes provide the one with the highest version number.

Link.3: Check whether the value of the *href* attribute allows some direct retrieval of the target resource via the Web (e.g. if the scheme is http: or ftp:), or an implicit resolution mechanism (e.g. DOI).

Link.4: Check whether an Alternative Representation ([altRep](#) (page 58)) is exposed in the link. This information may complement the *href* attribute and provide an immediate URI resolution mechanism for Items. Multiple locations may be given, as allowed in the Item Metadata component. In such a case the processor will use the role qualifier and URL scheme for choosing the most appropriate resource.

Link.5: Signal an error or ignore the link.

## 3.9 News Content Metadata

News Content Metadata is directly associated with the news information conveyed by the Item, independently of the processing of the Item in a professional workflow. Such information is wrapped in the `contentMeta` wrapper element and split between administrative and descriptive metadata.

### 3.9.1 Administrative Metadata

This is a set of properties associated with the administrative facet of content, i.e. data that cannot be inferred from "consuming" (reading, listening to, watching) the content.

All properties are optional. The order of the properties in this set is flexible: the non-repeatable properties MUST come first and then the repeatable properties may be inserted in any order.

Table 4. Administrative Metadata Group Elements

Element Title	Element Name	Card	Described on Page
Urgency	<a href="#">urgency</a>	(0..1)	216
Date Content Created	<a href="#">contentCreated</a>	(0..1)	94
Date Content Modified	<a href="#">contentModified</a>	(0..1)	95
Located	<a href="#">located</a>	(0..unbounded)	155
Information Source	<a href="#">infoSource</a>	(0..unbounded)	143
Creator	<a href="#">creator</a>	(0..unbounded)	92
Contributor	<a href="#">contributor</a>	(0..unbounded)	87
Audience	<a href="#">audience</a>	(0..unbounded)	62
Excluded Audience	<a href="#">exclAudience</a>	(0..unbounded)	118
Alternative Identifier	<a href="#">altId</a>	(0..unbounded)	56



### 3.9.1.1 Dates Processing Model

Two optional dates are associated with the content of an Item.

**contentCreated** (page 94) and **contentModified** (page 95) processing rules:

DatesGeneral.1: If the value provided by any date/time field does not conform to the appropriate syntax (e.g. format "YYYY-MM-DDTHH:MM:SS[+-]HH:MM:SS") it MUST be considered as being not existent.

DateValues.1: If contentCreated is present it MUST NOT be later than **versionCreated** (page 98).

Error handling if it is later: at the creator's site an error alert should be issued, on the receiver's site it should be set to versionCreated.

DateValues.2: If contentModified is present contentCreated SHOULD be present as well.

In this case contentModified MUST NOT be earlier than contentCreated.

Error handling if it is earlier: at the creator's site an error alert should be issued, on the receiver's site it should be set to contentCreated

DateValues.3: If contentModified is present it MUST NOT be later than versionCreated.

Error handling if it is later: at the creator's site an error alert should be issued, on the receiver's site it should be set to versionCreated.

DateProcessing.1: The recipient processor MUST first check if a contentModified element is present.

DateProcessing.2: If not it MUST check if a contentCreated element is present.

DateProcessing.3: If not it SHOULD assume that the content was created at the time indicated by versionCreated element in itemMeta.

### 3.9.1.2 Audience Processing Model

Audience processing may be used to form ad hoc groups of recipients for which the Item is particularly significant or to filter out some users from the list of intended recipients of an Item.

The audience is expressed as a set of "positive" values (**audience** (page 62) and a set of "negative" values. The logic is to make the content easy to find to the audience identified by the positive values, but keep this content away from the audience identified by the negative values. An attribute of each property may indicate the expected significance of the content for this specific audience, and acts as a threshold for recipient filters.

The model for the audience processing is only a part of the overall filter that is used to determine whether a particular recipient is entitled to have access to the Item. It could be combined with the processing of other properties to further narrow the number of Items that match the recipient profile.

The processing rule has to be considered as a function which returns TRUE to indicate the recipient is entitled to receive the content, FALSE in case he is not entitled and NULL if the item does not contain any audience statements that apply to the Recipient.

Audience processing rules:

Audience.1: If any of the exclAudience properties applies to the recipient: return FALSE

Audience.2: If any of the audience properties applies to the recipient: return TRUE.

Audience.3: Return NULL.

## **3.9.2 Descriptive Metadata**

This is a set of properties associated with the descriptive facet of news content, i.e. data that can be inferred from "consuming" (reading, listening to, watching) the news.



All properties are optional, repeatable and may be inserted in any order.

Table 5. Descriptive Metadata Group Elements

Element Title	Element Name	Card	Described on Page
Language	<b>language</b>	(0..unbounded)	151
Genre	<b>genre</b>	(0..unbounded)	127
Keyword	<b>keyword</b>	(0..unbounded)	149
Subject	<b>subject</b>	(0..unbounded)	210
Slugline	<b>slugline</b>	(0..unbounded)	207
Headline	<b>headline</b>	(0..unbounded)	133
Dateline	<b>dateline</b>	(0..unbounded)	104
By	<b>by</b>	(0..unbounded)	66
CreditLine	<b>creditline</b>	(0..unbounded)	93
Description	<b>description</b>	(0..unbounded)	107

### 3.9.3 Other Content Metadata

Each provider may add a set of metadata properties which have to be defined in a non-IPTC-G2 namespace. See also [XML Namespaces](#) (page 48) and [Extension Points in XML](#) (page 49).

### 3.10 Part Metadata

Streamed content may be split into different sections (called “shots” in the video world). Images may also be split in regions.

A specific set of metadata MAY be associated with any individual content part. Such metadata is wrapped in a [partMeta](#) (page 175) element, which is repeatable in the newsItem and MUST be inserted after contentMeta.

Each part MAY have a part identifier (partId) and a sequence number (seq).

Each part MAY be illustrated by an [icon](#) (page 134) - e.g. a keyframe of a video clip - which takes the form of an IRI. It is not mandatory for such icon to be a pure extraction of the content. If multiple icon elements are present they MUST represent the same visual content, only differentiated by rendition, contentType or format.

A section of a stream MAY be defined by a [timeDelim](#) (page 211) element. The time scope is expressed as *start* and *end* timestamp attributes plus an additional time unit (*timeunit*) attribute.

A region of an image MAY be defined by a [regionDelim](#) (page 218) element. Currently regions are limited to rectangles defined by {x, y, width, height} coordinates in pixels expressed as a set of attributes.

The role of this part in a stream of content MAY be defined by the [role](#) (page 196) property.

If, during the processing of the content, it appears that part delimiters do not correspond to any physical content, then the corresponding set of metadata MUST simply be discarded.

News Administrative and Descriptive Metadata may be applied to each part, in complement to the administrative and descriptive metadata applicable to the whole content.

Each provider may add a set of metadata properties which have to be defined in a non-IPTC -G2 namespace. See also [XML Namespaces](#) (page 48) and [Extension Points in XML](#) (page 49).

Note that partMeta is specific to the newsItem structure, and this feature is not present in other classes of Items.



### 3.10.1 Edit Units and Time Codes

It is recommended that time and durations are expressed in “edit units” (EditUnit), which represent the smallest editable portion of content, i.e. a video frame or an audio sample.

EditUnit = 1 / EditRate.

For video, the EditRate is the FrameRate.

For audio, the EditRate is the SampleRate.

The use of EditUnit is independent of the mode of representation of time (e.g. timecode) in editing devices. The timecode associates one value to each video frame or audio sample.

For video, the usual timecode format is HH:MM:SS:FF (Hours:Minutes:Seconds:Frames).

In the case of simple frame rates (e.g. 25 fps, 30 fps, 50 fps or 60 fps), the conversion of a number of EditUnits to timecode is simple.

However, there exist other frame rates (e.g. 29.97 fps, 59.94fps) for which this calculation requires more attention. A precise calculation would consist of replacing e.g. 29.97 fps by its exact value 1.001/30 fps and multiplying the number of EditUnits by 1.001 before conversion on the basis of 30 fps. Another method consists of calculating the timecode using the drop frame method defined in SMPTE 12M. The drop frame method is an approximation based e.g. on 29.97 fps (1.001001001/30 fps). The drop frame timecode is not systematically used, particularly if content is of a short duration with insignificant drift with the actual clock time. SMPTE 12M will evolve as it doesn't address higher frame rates with progressive scanning.

For audio, the usual video timecode (HH:MM:SS:FF) is used if the content also contains video. A time restricted timecode (HH:MM:SS) is often used for audio only content, although it can be completed by a number of complementary frames or its conversion in hundredths or thousandths of a second.

The time reference will be the one of reception or edition in the production system, which should be able to locate content in time based on the number of EditUnits.

### 3.10.2 Time Unit Types and Start/End Timestamp Formats

The format of the Start Timestamp (@start) and/or End Timestamp (@end) is implied by the associated Time Unit type (@timeunit), see the Time Delimiter element - [timeDelim](#) (page 211).

**Table 6** defines the processing of values of the three related attributes - but be aware: they are required by the XML Schema but may either show invalid values or be empty.

Table 6. Time Unit Type and Start/End Value Processing

Time Unit Type [@timeunit]	Start/End Timestamp [@start / @end]	How to Process
Invalid value	None	Ignore the Time Delimiter.
Invalid value	One or both	The default Time Unit Type value of editUnit MUST be used; the related format is used to parse the Timestamp value(s).
Valid value	None	Ignore the Time Delimiter.
Valid value	One or both	The defined Time Unit Type value MUST be used; the related format is used to parse the Timestamp value(s).

### 3.10.3 Assertions About Concepts

When a concept is used as the value of many properties, it may be useful to group supplemental information about this concept at a unique location.

The optional and repeatable [assert](#) (page 60) property provides information about a concept identified by a qualified code. The information is given as a set of properties providing metadata about the concept. Many assertions may be included in an Item.



Any property of the concept may be included at this point, especially its name, its relationships with other concepts, its definition.

**Note:** This information is only up to date at the time of last modification of the Item.

### 3.11 References to Inline Concepts

When the same concept appears as a string in several different labels or in the textual content of a newsItem, it may be useful to group information about this concept at a unique location.

The optional and repeatable **inlineRef** (page 138) property provides information about a concept found in some textual content. The string associated with the concept can be tagged by any element which provides an attribute of type ID. One or more local identifiers MAY be listed as value of the *idrefs* attribute of the inlineRef element.

The concept MUST be identified either by a qualified code or a literal value, and supplemental information MAY be given as a set of properties relative to the concept.

It is possible to give values for the confidence with which the metadata has been assigned, the relevance of the metadata to the string to which it is attached, and why the metadata has been included.

### 3.12 newsItem Content

Content may be included by value or by reference, and useful characteristics are represented along with such content, in order to facilitate its processing.

Alternative renditions of the news content, i.e. different technical representation of the same logical content, are wrapped by a **contentSet** (page 86) wrapper element. Their order of appearance in contentSet is of no relevance. Their presence is optional: this allows for a lightweight and extensible representation of information.

Each rendition SHOULD be defined by a *rendition* attribute.

All alternative renditions SHOULD be derived from an original rendition by a software processor. For example: images in different resolutions, vector graphics and alternative bitmap images, text in different formats (e.g. NITF and PDF). The rendition from which all other renditions originate is indicated by the *original* attribute of contentSet; this attribute takes as a value the local identifier (id) of the original content component included in the contentSet.

They are three kinds of content components, inline XML, inline data and remote content:

- ◆ The **inlineXML** (page 139) wrapper element holds XML content which is directly embedded in the element. The root element of this structure must be the root element of the language. Content may belong to any XML language capable of expressing generic or specialized news information, e.g. NITF, XHTML, SportsML or XBRL. The XML vocabulary is identified by a content type attribute (*contenttype*).
- ◆ The **inlineData** (page 136) wrapper element holds plain-text or base64 encoded content. Plain text or CDATA content MUST be identified by the "text/plain" content type. Binary content, like images, audio clips or even PDF or Word documents may be exchanged after proper encoding, but it is strongly recommended to use this structure for small assets only. The encoding algorithm MAY be indicated using the *encoding* attribute. In the absence of this attribute, the content must be plain text, and the content type must be set accordingly. Encoding is not constrained to base64 at this level of conformance.
- ◆ The **remoteContent** (page 191) wrapper element may be used for representing any kind of media and data format. The data is stored independently of the newsItem and is referenced via a hyperlink (*href*). The size in bytes of the remote content MAY be indicated. The element MAY also have **time-ValidityAttributes** (page 261) (*validfrom* and *validto*) which express the date and time between which the reference is active. The same rendition of content MAY be present at different remote loca-





tions. In such a case the same value of the *rendition* attribute MAY be given to several *remoteContent* elements.

The description of the content in each content component MAY be complemented by a content type (*contenttype*), a format acting as an optional refinement of the content type, an indication on the software tool used to generate the content (*generator*) and the date and time when the content was generated, plus additional news content characteristics.

### 3.13 News Content Characteristics

**newsContentCharacteristics** (page 264) are these physical properties of media content like the height and width of a picture, the word count of a news story or the duration of an audio clip, that help making selections among alternate renditions of news content.

The characteristics defined by the IPTC are a small and typical set of properties. Individual providers may add more characteristics they consider reasonable, i.e. audio data for professional broadcasting may require a different set from audio content for a podcast.

### 3.14 Channels

Some binary streams support the notion of channel or track: this is e.g. the case for DVD's, which are MPEG-2 encoded and provide several audio tracks in different languages. It may be important to indicate media characteristics on a per-channel level.

A repeatable **channel** (page 69) element MAY therefore be defined as a child of a **remoteContent** (page 191) element.

Each logical channel MAY have a local identifier (*chnid*), an indication of the media type of the data conveyed by the channel and an indication of the role the data plays in the scope of the full content, e.g. "voice over".

Each logical channel MAY be additionally described by the news content characteristics corresponding to the media conveyed in the channel.

## 4 Representing Concept Information - concept Component

### 4.1 Concept Component

Concepts fall in two broad categories: named entities and generic (or abstract) concepts. Generic concepts range from themes (e.g. soccer) to emotions (e.g. smiling, love); they have no specific property defined, beyond generic properties. Named entities are people, organisations, geopolitical areas, points of interest and objects for which a specific set of properties is defined for the purpose of a refined definition and improved search and processing capabilities.

The **concept** (page 72) element provides a set of properties shared by all concepts.

A concept can be identified in different schemes by different controlled values, this is why a concept identifier must be unambiguous, but cannot be unique: for example, a company is commonly identified by different ticker symbols. In the case of abstract topics, the strict sameness of two concepts may be subject to discussion, and therefore a notion of equivalence of concepts is preferred.

A concept **MUST** have a concept identifier, expressed as a **conceptId** (page 74) child element.

The **conceptId** element **MUST** have a *qcode* attribute. It **MAY** have a *created* attribute and a *retired* attribute which limit the usage of the concept identifier in time.

A concept **MAY** have a **type** (page 215) child element. The type of a concept reflects its nature, e.g. generic, person, organisation, geopolitical area, point of interest etc...

A concept **MUST** have a **name** (page 184) and **MAY** be further defined by **remotelInfo** (page 194) and in natural-language by a **definition** (page 73) or **note** (page 165). These labels are repeatable and **MAY** be specified in multiple languages.

More detailed facets of a concept (e.g. that the concept “is” an artist, listed company, city, restaurant) **MAY** be expressed by a specific **facet** (page 121) property. The facet property **MAY** have a *rel* attribute which specifies the exact facet which is described.

Different variants of a name are allowed. The *role* attribute the semantic of the property and takes values like “usual”, “official”, “married” (for a person) “acronym” (for an organisation), “synonym”, “adjectival” (e.g. French for France). The *part* attribute identifies the part of the name conveyed by the property, and takes values like “given”, “family” (for a person). Definitions and notes also support a role, which takes values like “history”, “change” (for a description), “editorial”, “scope” (for a note).

The descriptive elements **name** (page 184), **definition** (page 73), **note** (page 165), **remotelInfo** (page 194), and **facet** (page 121) **MAY** have *validfrom* and *validto* attributes which limit the use of the property in time.

The **remotelInfo** element **MAY** be used to express any external information about the concept as such. Be aware that the link element in the **itemMeta** wrapper should only be used for linking a Concept Item as a whole to another resource, e.g. a previous version, or another **ConceptItem** from which this one was derived and not to resources relevant to describing the Concept.

A concept **MAY** have a set of alternative identifiers, expressed as **sameAs** (page 202) child elements.

The **sameAs** element **MUST** have either a *qcode* or a literal attribute which identifies a concept. It **MAY** additionally have a *type* attribute which reflects the nature of the associated concept, and **MAY** have one or more names (see **Flexible 1 Property Type** (page 237)). *validfrom* and *validto* attributes **MAY** limit the relationship in time.

### 4.2 Relationships Between Concepts

A concept **MAY** be associated with other concepts in the form of a taxonomy (i.e. a hierarchy of concepts) or thesaurus (i.e. a set of concepts associated via standard relationships). A concept **MAY** have an indication of most standard relationships as **broader** (page 65), **narrower** (page 160) and **related** (page 189) child elements.



The broader, narrower and related properties MUST have either a *qcode* or a literal attribute which identifies a concept. They MAY additionally have a *type* attribute which reflects the nature of the associated concept, and MAY have one or more names (see [Flexible 1 Property Type](#) (page 237)).

The *broader*, *narrower* and *related* properties MAY also have *validfrom* and *validto* attributes which limit the relationship in time, a *rel* attribute which details the name given to the relationship and a *rank* attribute which specifies the rank of the current concept among concepts having a relationship to the target concept. They also have a *facet* child property for expressing an intrinsic property of the related concept.

The *related* property has a *bag* property for allowing the expression of composite concepts (see [Composite Concepts](#) on page 45).

### 4.3 Details on Specific Entities

Details associated with specific entities MAY additionally be defined. All have been chosen for their potential usefulness in the news industry.

[personDetails](#) (page 177) include a date of birth (*born*) and date of death (*died*) a repeatable indication of affiliation with an organisation and contact information (*contactInfo*).

[organisationDetails](#) (page 170) include a date of foundation (*founded*) and date of dissolution (*dissolved*), a repeatable location and contact information (*contactInfo*).

The registered address of an organisation is indicated as part of its contact information; in such a case this address may not be used for making direct contact with this company.

[geoAreaDetails](#) (page 129) include the geographic coordinates (*position*) of the place.

The position MUST have *latitude* and *longitude* attributes. It MAY have an indication of the altitude above the zero elevation reference level.

It MAY have an indication of coordinate reference system (*gpsdatum* attribute) expressed as a string. In the absence of this attribute, the WGS84 system is assumed.

[POIDetails](#) (page 179) include the geographic coordinates (*position*) of the place, plus practical information like opening hours (*openHours*), capacity, access information, details on the location (e.g. room number, stair number etc.), and contact information (*contactInfo*).

[objectDetails](#) (page 166) include a date of creation, a creator of the object and a copyright notice.

#### 4.3.1 Contact Information

[contactInfo](#) (page 79) is repeatable in the definition of a person, an organisation and a Point of Interest, and each set of properties supports a *role* attribute which makes possible to group together all information belonging of the same nature.

Contact information include email addresses, instant messaging addresses (*im*), international phone numbers, international fax numbers, web addresses, postal addresses and notes.

E-mail and instant messaging addresses, phone and fax number are all electronic addresses. These are qualified by a *role* attribute which specifies the nature of the address, e.g. home or work.

#### 4.3.2 Postal Address

The definition of a Postal Address ([address](#) (page 180)) includes free-text lines (in the format expected by a recipient postal service), the indication of a locality (i.e. city, town, village etc...), a subdivision of a country (*area*), a country and a postal code (*postalCode*).

A postal address is structured as a set of properties likely edited and displayed as a form. The relative order of its properties is not universal, and if used for traditional postal mail, presentation algorithms are to be developed which depend on the source and recipient countries.

The city, country area and country may be indicated as a name or as a controlled value. The use of an ISO compliant country code is particularly recommended.



## 5 Managing Individual Concepts - conceptItem

An XML Schema file corresponding to the specifications for this item is available (see [The Full Set of Specification Documents](#) on page 3).

### 5.1 Description

A [conceptItem](#) (page 75) aims to convey knowledge about a unique concept (a named entity such as an organisation or an abstract notion such as a news subject). Typically a conceptItem itself holds only rather short and structured information about the concept and about its relationships with other concepts.

Typical characteristics of a conceptItem are:

- ◆ It focuses on a single concept or entity.
- ◆ It will usually be updated infrequently but over a long period of time, when the information about the concept evolves.
- ◆ Its content is of long term interest.
- ◆ It may be referenced by other items.

Different conceptItems, managed by different providers, may contain structured information about the same concept.

### 5.2 Structure of a conceptItem

The model of a conceptItem is very similar to the model of a newsItem. Both share the same indicators of compliance with a standard and conformance level, Identification and versioning, Signature, Rights Information, Item Metadata, Item links. Please review the corresponding specification of a newsItem for more information.

Note that the globally unique guid of a conceptItem, which is used for management purposes, must not be confused with the unambiguous concept identifier ([conceptId](#) (page 74)) defined by an authority and conveyed as part of the content of the Item.

### 5.3 Item Metadata

The IPTC provides a mandatory standardised scheme applicable to the [itemClass](#) (page 144) property, identified by the URI: <http://cv.iptc.org/newscodes/cinature/>.

### 5.4 Concept related Metadata

The set of administrative metadata is common to all classes of Items. Please review [Representing News - newsItem](#) (page 22) for more information.

A conceptItem does not support descriptive metadata.

### 5.5 conceptItem Content

The content of a conceptItem is a concept component (see [Concept Component](#) on page 34).



## 6 Managing Sets of Concepts - knowledgeltem

An XML Schema file corresponding to the specifications for this item is available (see [The Full Set of Specification Documents](#) on page 3).

### 6.1 Description

A **knowledgeltem** (page 150) bundles a set of concept components which are managed and exchanged as a whole. A knowledgeltem is used best where a provider wants to circulate a snapshot of a set of entries from one or more controlled vocabularies.

The concepts represented in a knowledgeltem can be of different types, and their identifiers may come from different schemes. A “scheme definition” is therefore a particular case of structure, where all concepts support a concept identifier from a same specific scheme.

Examples of knowledgeltems are the taxonomy of IPTC Subject NewsCodes or an authority list of people’s descriptions maintained by a given provider. Typical characteristics of a knowledgeltem are:

- ◆ It contains a meaningful set of concepts components.
- ◆ It will usually be updated infrequently but over a long period of time, for example when a controlled vocabulary evolves.
- ◆ Its content is of long term interest.

### 6.2 Structure of a knowledgeltem

The model of a knowledgeltem is very similar to the model of a newsItem. Both share the same indicators of compliance with a standard and conformance level, Identification and Versioning, Signature, Rights Information, Item Metadata, Item links. Please review [Representing News - newsItem](#) (page 22) for more information.

### 6.3 Item Metadata

The IPTC provides a mandatory standardised scheme applicable to the **itemClass** (page 144) property, identified by the URI <http://cv.iptc.org/newscodes/cinature/>.

### 6.4 Knowledge Related Metadata

The set of administrative metadata is common to all classes of Items. Please review the corresponding specification of a newsItem for more information.

The set of descriptive metadata is listed below. All properties are optional, repeatable and may be inserted in any order.

Table 7. Knowledge Descriptive Metadata Group Elements

Element Title	Element Name	Card	Described on Page
Language	<b>language</b>	(0..unbounded)	151
Keyword	<b>keyword</b>	(0..unbounded)	149
Subject	<b>subject</b>	(0..unbounded)	210
Description	<b>description</b>	(0..unbounded)	107

Each provider may add a set of metadata properties which have to be defined in a non-IPTC-G2 namespace. See also [XML Namespaces](#) (page 48) and [Extension Points in XML](#) (page 49).

### 6.5 knowledgeltem Content

A **conceptSet** (page 77) wrapper element contains a set of concept components (see [Concept Component](#) on page 34). Their order of appearance in conceptSet is not relevant.

**Note:** All concept definitions share the same catalog of schemes, declared at the top of the knowledgeltem.



## 7 Packaging Items - **packageltem**

An XML Schema file corresponding to the specifications for this item is available (see [The Full Set of Specification Documents](#) on page 3).

A **packageltem** (page 172) facilitates the packaging of all kinds of Items, from really simple constructs to the highly hierarchical structures created by some news providers.

Examples of **packageltems** are a collection of pictures, a “top ten” list of **newsItems**, an unordered set of **newsItems** relative to the same event, the representation of a newspaper section or page.

Typical characteristics of a Package Item are:

- ◆ It provides some structure to news related information, and is expressed via a hierarchy of items.
- ◆ The Items found in a **packageltem** stay independent from the package: they can be managed individually, and the package keeps only references to them.
- ◆ Its content is of medium term interest.

### 7.1 Structure of a **packageltem**

The model of a **packageltem** is very similar to the model of a **newsItem** (page 163). Both share the same indicators of compliance with a standard and conformance level, Identification and versioning, signature, rights information, Item metadata, Item links. Please review the corresponding specification of a **newsItem** for more information.

### 7.2 Item Metadata

The IPTC provides mandatory standardised schemes applicable to the **itemClass** property of a **packageltem**, identified by the URI <http://cv.iptc.org/newscodes/ninature/> and <http://cv.iptc.org/newscodes/cinature/>.

### 7.3 Package Related Metadata

The set of administrative and descriptive metadata is common between **packageltems** and **newsItems**. Please review [Representing News - newsItem](#) (page 22) for more information.

### 7.4 **packageltem** Content

A **groupSet** (page 132) represents a tree of Items. All Items of a package are included by reference, as physical inclusion would break the capability to manage inner Items independently of the outer Package Item.

The **groupSet** is optional. This allows for a lightweight and progressive representation of information.

There **MUST** be at least one **group** (page 130) element in the **groupSet**. If there is more than one **group** in the **groupSet** element, a specific **group** acts as the root of the tree. In this case the value of **root** attribute of the **groupSet** element **MUST** be the local reference to the **group** acting as a root.

A **group** component contains references to other **group** components (**groupRef** (page 131) with its **idref** attribute) of the same package item and references to Items or Web resource (**itemRef** (page 146) with its **guidref** and **href** attributes), in any order.

Each **group** **MUST** have an **id** attribute which identifies this **group**, and each **group** **MUST** have a **role** attribute which indicates the part this **group** plays within its container.

The order of the sub-groups and references to Items **MAY** be significant; a **mode** attribute indicates whether the elements in the **group** are complementary and unordered, complementary and ordered or a set of alternative elements. In the absence of a **mode** attribute the **group** is treated as complementary and unordered.

The **itemRef** element **MAY** contain metadata extracted from the target Item or Web resource. The recipient **MUST NOT** consider that such hints constitute a complete representation of the Item.



The itemRef element MAY have a *rank* attribute which represents the rank of the Item among other Items in each group.

The itemRef element MAY also have time validity attributes (*validfrom* and *validto*) which express the date and time between which the reference is active.

Sample:

```
<groupSet root="g1">
  <group id="g1" mode="mode:seq" role="group:main">
    <groupRef idref="g2"/>
    <itemRef guidref="urn:newsml:iptc.org:20070530:tutorial-text-xhtml"/>
  </group>
  <group id="g2" role="group:gallery">
    <itemRef guidref="urn:newsml:iptc.org:20070530:tutorial-iptc-logo"/>
    <itemRef guidref="urn:newsml:iptc.org:20070530:tutorial-video"/>
  </group>
</groupSet>
```



## 8 Dealing with Controlled Values

### 8.1 {scheme, code} Pair, Scheme URI and Concept URI

Many properties usually have their value taken from a well defined scheme, i.e. a controlled vocabulary (i.e. a classification system, authority list, taxonomy, thesaurus etc ...).

These values are represented by a formal combination - a {scheme, code} pair - primarily intended to be consumed by processing software. A scheme is logically a closed set of related concepts, and a {scheme, code} pair unambiguously identifies a single concept.

A scheme is in practice a list of codes managed by a specific authority (which we shall refer to as the Scheme Authority), which may be the IPTC or any other well known standardisation body, or may be an individual news provider. A {scheme, code} pair therefore fully identifies a term from a controlled vocabulary (i.e. a scheme). A code **MUST** be persistent over time in order to avoid ambiguities when processing archives documents.

A scheme is fully and unambiguously identified by a scheme URI. The concept represented by a code is fully and unambiguously identified by a concept URI. The concept URI is obtained by appending the code to the scheme URI. **Qualified Code (QCode)** (page 41) shows how a more compact form of a concept identifier is used in the news workflow.

As an example, an IPTC scheme for news categories might be identified by the URI "http://cv.iptc.org/newscodes/theme/". If the code "15000000" represents the concept of "Sport", then the concept URI for "Sport" would be "http://cv.iptc.org/newscodes/theme/15000000".

It is not mandatory that the Scheme Authority maintains the complete list of codes making up a given scheme in any particular form, e.g. as an XML file. It is sufficient that an unambiguous identifier is defined for each scheme a provider uses, and that this identifier is known by a Catalog (see **Catalog of Controlled Vocabularies** on page 23) to the customers of the news feed this provider offers.

Common needs are:

- ◆ To access human readable information about a scheme.
- ◆ To retrieve all terms of a scheme (e.g. to display a list of choice).
- ◆ To access human readable information about a qualified code.
- ◆ To check that a qualified code belongs to a scheme.
- ◆ To retrieve the definition of the concept identified by a qualified code in a given scheme.

Therefore the scheme URI **SHOULD** resolve to a resource (or resources) containing information about the scheme in both human-readable and machine-readable forms. Meeting this requirement is mandatory for schemes which are to be compliant with the Semantic Web.

The concept URI **SHOULD** also resolve to a resource (or resources) containing information about the concept in both human-readable and machine-readable forms. Meeting this requirement is mandatory for concept URIs which are to be compliant with the Semantic Web.

If content negotiation is implemented using HTTP, then the HTTP Accept header should be used to request information in the required format and the HTTP Accept-Language header should be used to request information in the required human language.

When designing a scheme URI, the following points should be taken into consideration:

- ◆ Each scheme URI must end with a suitable terminating character, e.g. "/" or "#". Each of these has various advantages and disadvantages, which are discussed extensively in documents available on the Web.
- ◆ One point worth mentioning here is that not all strings which can be used to construct a legal URI are automatically legal in the context of HTML. For example, "http://cv.iptc.org/newscodes/theme.html#15000000" is not a legal HTML URI, as an HTML fragment name cannot start with a digit.



## 8.2 Qualified Code (QCode)

In order to manipulate controlled values in an efficient manner, a compact representation of a concept identifier is needed, a syntax which allows the use of a {scheme, code} pair as the value of an XML attribute.

For this purpose a short string called scheme alias (aka prefix) is defined by a provider as a substitute for a scheme URI in the scope of a single Item, and a compact notation of a scheme-code pair is defined, called qualified code or QCode.

The datatype for a compact notation of a scheme-code pair is called qualified code or more simply QCode. QCodes are the mandatory way to express controlled values in properties like **itemClass** (page 144) or **pubStatus** (page 185).

QCodes are notated by the following syntax: a scheme alias acting as a first part, followed by a colon (:) character, followed by a code from the scheme. They are case sensitive.

The value space of the **QCodeType** (page 252) datatype is a set of {scheme, code} pairs which identify concepts.

Note that:

- ◆ This is similar to the value space of the QName datatype, i.e. a set of {namespace, local part} pairs which identify element or attribute names.

**Note:** QNames cannot be used for this purpose, because the local part of QNames cannot be a numeric, but the News industry and the Financial industry are full of taxonomies making use of numeric codes. They aren't alone in this aspect (consider ISBN and ISSN).

- ◆ QCodes allow any sequence of legal URI characters in the code part, including, for example, digits only, dashes, slashes, etc.
- ◆ QCodes MUST have a non-empty scheme alias.

QCodes can be viewed to a certain extent as short, lexical representations of URIs. Be careful: the mapping from a qualified code to a URI is not bijective: a URI cannot be mapped back to a qualified code, because the separator of the tuple is not explicitly defined in the URI.

In order to resolve a qualified code, a processor MUST loop through the scheme elements defined in the scope of the Item. If the QCode scheme alias is found as value of the *alias* attribute of a scheme element, the scheme URI is the associated *uri* attribute and the controlled value is the resulting {scheme URI, code} pair. If no corresponding scheme alias is found, the processor SHOULD raise an error and consider that the property has no value.

### 8.2.1 Lexical Space Specification and Processing Model for Scheme URIs, Scheme Aliases, Codes, and QCodes

#### 8.2.1.1 Lexical Space

- ◆ Lexical space for Scheme URIs: conforms with the Unreserved Characters of RFC 3986, section 2.3. Reserved Characters as per RFC 3986, section 2.2 must be considered depending on the selected URI scheme.
- ◆ Lexical space for Aliases: all characters except colon (#x3A) and white space (#x20 | #x9 | #xD | #xA).
- ◆ Lexical space for Codes:
  - All Unreserved Characters of RFC 3986, section 2.3., except white space (#x20 | #x9 | #xD | #xA). Reserved Characters as per RFC 3986, section 2.2 must be considered depending on the selected URI scheme.
  - Whitespace characters must be replaced by a sequence of one or more unreserved characters that is reused for this purpose according to the practices of the provider; it is recommended that such a sequence is not part of the any of the codes used by the provider



## 8.2.1.2 Processing Model

Given are:

- ◆ a Scheme URI
- ◆ a corresponding Scheme Alias
- ◆ a Code

### 8.2.1.2.1 QCodes

#### 8.2.1.2.1.1 Creating QCodes (any G2 Item)

1. Concatenate the Scheme Alias, a colon and the Code to a string.
2. Apply any required XML encoding to this string (Note: this is typically done by the XML processor software).
3. The resulting string is applied as a QCode value.

#### 8.2.1.2.1.2 Receiving/Parsing QCodes from an XML Document (any G2 Item)

1. Retrieve the QCode value from the XML document
2. Apply any required XML decoding (Note: this is typically done by the XML processor software).
3. To split a QCode term into the alias and the code part, identify the first colon searching from left to right. The string to the left of the colon is the alias; the string to the right is the code. If it encounters none the QCode is invalid.
4. Check whether the alias is defined in the catalog. If it is not, the QCode is invalid

### 8.2.1.2.2 Concept URIs

G2 processors should be able to process Internationalized Resource Identifiers (IRIs) as per RFC 3987.

#### 8.2.1.2.2.1 Creating a Concept URI/IRI:

1. Concatenate the Scheme URI and the Code resulting in the Concept URI.
2. Check if any Reserved Characters (see RFC 3986 section 2.2) are included based on the used URI scheme. In particular check for the reserved characters of the http scheme. If such characters are used apply percent-encoding as per RFC 3986.

**Note:** This check and any corresponding changes should be done by software at the application level because only at this level it is known if e.g. a & character is an http URL delimiter or a character in one of the parts of the URI.

3. With this (potentially encoded) string:

First, consider it from the IRI RFC 3987, section 3.1 perspective:

*When the IRI is used solely for identification purposes, it is not necessary to map the IRI to a URI (see section 5). However, when an IRI is used for resource retrieval, the resource that the IRI locates is the same as the one located by the URI obtained after converting the IRI according to the procedure defined here.*

Second, if the IRI is an IRI as per RFC 3986 and if it should be used for retrieval, apply any required percent-encoding as defined by RFC 3987 and RFC 3986. This encoding could be done by standard software (component).

#### 8.2.1.2.2.2 Comparing Concept URIs/IRIs:

If provided Concept URIs are IRIs per RFC 3987 then they must be compared for equivalence as defined per RFC 3987, section 5.

If provided Concept URIs are URIs per RFC 3986 then they must be compared for equivalence as defined per RFC 3986, section 6.



## 8.3 Processing Catalogs

### 8.3.1 Structure of a Catalog

A **Catalog** (page 68) **MUST** have one or more scheme elements. A catalog **MAY** have one or more titles in different languages. It **MAY** also have a pointer to some additional information available on the Web, and especially its evolution and latest version. Such information will help people follow the evolution of a shared catalog like the IPTC G2 catalog, and include in their Items a reference to the latest version if they wish.

It **MUST** have one or more scheme elements. A scheme element **MUST** have a scheme *alias* attribute and a corresponding scheme *uri* attribute.

Each Item defines its own set of scheme definitions, and there is no interaction between scheme definitions in different Items. Scheme alias declarations are local to the Item in which they appear and cannot be overridden in a given Item.

### 8.3.2 Processing Remote Catalogs

By activating the hyperlink of a remoteCatalog (see **catalogRef** on page 190), a plain catalog structure is returned, and **MUST** be processed as if were locally defined.

### 8.3.3 Caching a Catalog

It is recommended for a processor to cache a remote catalog indefinitely, so that provider's servers are not overcharged with file requests.

When a processor opens an Item, it **MUST** check the URL(s) of the catalog(s) found in its header. If a catalog has not been previously cached, the processor **MUST** fetch it, check it, and **SHOULD** store its content in a cache.

Different remote catalogs **MAY** define different mappings for a given scheme alias. An entry in a remote catalog cache is therefore a triple {remote catalog URL, scheme alias, scheme URI}.

### 8.3.4 Checking a Catalog

It is OK for one scheme URI to have two aliases. It is an error if one alias is mapped to two different URIs in the scope of a single Item (an issue called alias collision). Note that this error may arise within a catalog, as well as across a set of catalogs (local or remote) declared in a given Item.

Before processing an Item, a processor **MUST** check its catalogs. If an alias collision is found, the processor **MUST** reject the Item as it can lead to misinterpretation of the information.

**Note:** If an aggregator finds an alias collision (i.e. the same alias associated with two URIs) while creating a packageItem which aggregates content from various providers, the aggregator **MUST** change one or both of the aliases before publishing the packageItem. This can be done by creating and publishing one or more non-clashing external catalogs (which replace the original external catalogs) and/or by replacing one or more external catalogs with non-clashing in-line scheme declarations.

## 8.4 Processing Schemes

### 8.4.1 Evolution of Scheme URIs

Schemes evolve: terms are added, names are changed, terms are retired. An authority will release a new version after each update. A provider may not want to adopt the latest version of a scheme. The scheme URI **MUST** be stable as long as the evolution does not break backward compatibility rules.

### 8.4.2 Retrieving All Terms of a Scheme

Here we are interested in schemes defined as an explicit list of terms. Schemes defined via an algorithm are out of scope of this section. A scheme definition is defined as the finite set of terms composing a scheme. A scheme definition **MAY** be a subset of an original scheme, e.g. maintained by an external authority.



**Note:** An authority is not necessarily able to make scheme definitions available for operational use, and a provider may use only a subset of the scheme defined by an authority.

A provider SHOULD make a scheme definition available for its users for operational use as the content of a knowledgeitem, where each term is represented as a concept component, i.e. a concept identifier, a list of names in one or more languages, plus additional properties of the concept (all but the identifier being optional).

An authority MAY provide different variants of a scheme definition, e.g. a list of codes, a list of codes plus a name in a specific language, a list of codes plus names in all available languages.

For each variant of a scheme definition, the URL of the corresponding knowledgeitem SHOULD be available using e.g. content negotiation.

Selection from among the renditions MAY be performed automatically (if the processor is capable of doing so) or manually by the user selecting from a hypertext menu.

## 8.5 Qualified and Typed Properties

Qualified properties – of datatype **QualPropType** (page 253) – only support controlled values in the format of QCodes.

A large subset of these properties supports concepts of different types as a value. Therefore typed qualified properties – of datatype **TypedQualPropType** (page 259) – additionally provide a concept type relative to the value of the property.

For example, the type of the concept assigned as subject of a news story may be a theme (e.g. sport or football), a person, an organisation, a geographical area, a point of interest, an event, a business sector, a currency etc. The concept type of a **creator** (page 92), **contributor** (page 87) and **infoSource** (page 143) of an Item may be a person or an organisation

Qualified properties MAY be complemented by one or more names associated with the underlying concept. Names can be expressed in different languages or variants.

## 8.6 Flexible Properties

It is not always possible or sensible to use a QCode as metadata value. As an example, few news organisations maintain a formal listing of their editors, and therefore using a controlled value for the creator property is not always possible.

In order to fulfil this need, a large number of properties allow for literal values – i.e. uncontrolled free-text values – to be applied instead of controlled values. But also free-text literal values are identifiers of a concept and not a human readable description.

Therefore flexible properties – of datatype Flexible Property Type or a derived datatype – support both controlled (qcode) and uncontrolled (literal) values.

QCodes and literals are mutually exclusive for one property, but either one or the other MUST be indicated.

The value of a flexible property identifies a given concept with a specific type. It is useful to express e.g. that the provider of a news item is a person or an organisation. The *type* of the concept MAY be indicated as an attribute of the flexible property.

One or more additional name properties MAY be provided in different languages and variants for display. If the value of the property is a literal and no additional name is given, the recipient MAY use the literal value for direct display. But as the primary use of a literal is being an identifier it may not tell much about the meaning of the metadata.

Flexible properties MAY also be complemented by other information about the concept, like properties from Concept Relationships Group (see **Table 174** on page 220) and Concept Definition Group (see **Table 173** on page 220).



Flexible properties which value specifically identifies a person, an organisation or any other entity for which detailed properties are defined in this specification, MAY contain detailed information about this entity, e.g. a date of birth for a person or a location for an organisation.

Such information constitutes “hints” about the concept, which may be useful for display or indexing, but which should not be used to convey knowledge stored as-is in a knowledge repository. A specific mechanism, based on `conceptItems` and `knowledgeItems`, is set-up in the News Architecture for managing knowledge.

## 8.7 Composite Concepts

Several flexible properties support composite concepts. Composite concepts, a.k.a. pre-coordinated terms, are “glued” together to represent a concept made of atomic parts.

Therefore flexible concept properties – of datatype **Flexible 1 Concept Property Type** (page 235) – have a `bag` child element which is used to express a new concept, composed from multiple existing concepts. The description of each existing concept is placed in a `bit` child element of the `bag` (page 63) wrapper.

Examples of possible composite concepts are:

- ◆ John Doe Smiling {John Doe + Smiling }
- ◆ Women's 100m Swimming Final {Women + Swimming + 100m + Final}
- ◆ Positive pre-announcement by Citigroup {Citigroup + Pre-announcement + Positive}
- ◆ Microsoft's share price has moved up {Microsoft + Share price + Up}
- ◆ The Clintons {Bill Clinton + Hillary Clinton}

## 8.8 Editing Attributes

In a professional and collaborative news workflow, it makes sense to identify all elements defined by the model in order to later act on them individually. Also, metadata is not always entered by one person at one time, but may be entered by different people, organisations or systems at different time. Therefore it may be needed to keep track of who is assigned the editing of specific properties, and when and by whom a property has been given a value.

For this purpose, all metadata properties share an Editing Attributes Group (see **Table 218** on page 261), i.e. an optional local identifier (`id`) and the optional indication of the creator and the date (and, optionally, the time) when the property was last modified.



## 9 Dealing with Labels and Blocks

### 9.1 Introduction

Labels expose aspects of news as natural language strings. They are assertions expressed as natural language strings intended to be consumed by human beings. They are typically displayed alongside the content of an Item or in place of Items in a list, providing a means of selection among them.

Blocks are simply labels with an additional line break. They are primarily used for notes, comments or instructions created by a news provider for use by recipient editorial teams.

Labels and blocks MAY have a *role* attribute, which refines the semantics of the property.

Labels and blocks MAY have a *media* attribute. When present, the value MUST conform to the Cascading Style Sheets specification [CSS]. Several media types can be given as space separated values.

All labels and blocks support rich text, i.e. text interspersed with some specific markup, identical to XHTML1.1 markup: the anchor ([a](#) (page 59)) for the inclusion of hyperlinks, the [span](#) (page 208) as a generic mechanism for adding information to text, simple [ruby](#) (page 198) markup used in Japanese publications and [inline](#) (page 135) for semantic inline markup.

The inline property identifies a concept present in a label or block either by a qualified code or a literal value, plus an optional type. Additional information about this concept can be represented using an [assert](#) (page 60) property value, plus a basic set of properties defining the concept.

### 9.2 Internationalization Attributes

In an international news workflow, fine grained control of language information in the hierarchy of nodes constituting an Item is needed.

For this purpose, all labels – and all ancestors of such an element – share an International Attributes Group (see [Table 217](#) on page 261) , i.e. an optional language tag (xml:lang) and indication of the directionality of textual content (dir).



## 10 Exchanging Items - newsMessage

A **newsMessage** (page 164) facilitates the exchange of all kinds of items by any kind of digital transmission, especially in a broadcast or multicast network.

The content of a newsMessage is an **itemSet** (page 147) component.

An itemSet contains a set of newsItems, packageItems, conceptItems and knowledgeItems. The model assigns no significance to the order of Items within the News Message.

The use of a News Message is totally optional in a news workflow. Alternatively, Items may be exchanged using SOAP, WebDAV, ICE, the Atom Publication Protocol (using Atom feeds, and items as payload of an Atom entry) or any other possible syndication protocol.

It may be useful for a recipient to store the information conveyed by a message, but this is not mandatory. Usually the messaging information will be maintained separately from the information relative to the contained items.

### 10.1 Message Information

A newsMessage **MUST** have a date of transmission – **sent** (page 103). The date of transmission **MAY** not be updated in case of retransmission of the message.

A newsMessage **MAY** have a **sender** (page 205) child element, which may be an organisation or a person. The structure of this string is not specified by the IPTC. Best practice is to identify a sender by its domain name

It **MAY** have a transmission identifier – **transmitId** (page 214) – and a priority of transmission. No two newsMessages sent by the same sender on the same date can have the same identifier. In case of retransmission it is not required to update this identifier. The structure of this string is not specified by the IPTC.

It **MAY** indicate the point of **origin** (page 169) of the message, using a provider defined syntax.

It **MAY** have one or more **timestamp** (page 213)(s) associated with the message. The exact meaning of this timestamp may be refined by a *role* attribute.

It **MAY** have one or more **destination** (page 108) properties using a provider defined syntax, and the indication of one or more channels – **channel** (page 71) – of transmission.

Each particular provider is equally able to add to this set information of its own, by mutual agreement with the recipients of the Item.

### 10.2 About Using Schemes in a newsMessage

It is important to note that a newsMessage does not define any catalog that would be common to the Items it contains. There is no interaction between the scheme declarations present in different Items exchanged in a newsMessage.



## 11 Specification Reference

This section provides all specifications for this G2-Standards, the different specifications tables are cross referenced from other parts of this document.

### 11.1 Introduction to the Common Components

News exchange formats share many metadata properties as they are about the same data: something newsworthy to be exchanged. For that reason the family of IPTC G2-Standards share a large set of properties which are common to all family members and this common data model and set of specifications is called the IPTC News Architecture for G2-Standards (NAR).

This Specification Reference section provides a mix of specifications coming from the NAR and additionally from this G2-Standard.

The components specified in this Specification Reference can be split into these 3 groups:

1. Fine grained components, called a datatype. A datatype has no specific business meaning or semantics of its own and only takes on business meaning when used as the data type of a property. Datatypes fall in two groups:
  - Simple data types are primitive data types, as found in software languages or XML schema definitions (e.g.. integer, string). Some restriction may be imposed, such as Int100Type where an integer has been restricted to a value range of 0 to 100.
  - Complex data types are simple data types extended to add further information in order to correctly represent the value. Such ancillary information takes the form of attributes. For example a Label-Type supports mixed content and is extended with language and role attributes.

For a G2-Standard the names of datatypes end with a "Type" suffix (e.g. QCodeType).

2. Medium grained components, called basic component or property. A property represents a single piece of business information and uses an existing data type or defines it own local datatype to provide its content model. It is capable of being used independently or as part of a group. Like a complex data type, a basic component can be qualified by ancillary data if required to complete its meaning. For example, a slugline element of data type string supports an additional separator attribute.
3. Coarse grained components, called aggregate component. It is a collection of properties that together is more than the sum of its constituent parts. The properties composing the whole can be properties or aggregate components. An aggregate component may be designed so it supports an extension point where news providers can extend its usage. For example, a descriptive component is defined as a group of properties like title and subject, and a person component is defined as a group of properties like name and date of birth.

### 11.2 General Specifications

#### 11.2.1 XML Namespaces

Table 8. XML Namespaces

Namespace URI	Recommended Alias	Usage Note
<a href="http://iptc.org/std/nar/2006-10-01/">http://iptc.org/std/nar/2006-10-01/</a>	nar	For all common components of the IPTC G2-Standards.





## 11.2.2 MIME Types

Table 9. MIME Types

Namespace URI	Usage Note
application/vnd.iptc.g2.newsitem+xml	For all kinds of G2 News Items.
application/vnd.iptc.g2.conceptitem+xml	For all kinds of G2 Concept Items.
application/vnd.iptc.g2.packageitem+xml	For all kinds of G2 Package Items.
application/vnd.iptc.g2.knowledgeitem+xml	For all kinds of G2 Knowledge Items.

## 11.2.3 Extension Points in XML

For attributes: each element of a G2-Standard allows to add provider specific attributes from any other XML namespace than the News Architecture for G2 namespace (see [XML Namespaces](#) on page 48).

For elements: Some elements which have child elements allow to add provider specific elements from any namespace other than the News Architecture for G2 namespace (see [XML Namespaces](#) on page 48). A few elements allow adding any element from any XML namespace - including the News Architecture for G2 namespace - but this is a special case only.

## 11.3 Implementation Design Rules

These design rules were applied while developing the G2-Standards. Some apply to all kinds of technical implementations, other only to one specific implementation. Further some rules are only applicable at one of the Conformance Levels CCL or PCL.

- ◆ Each element supports editing attributes (PCL).
- ◆ Each element has an extension point at the attribute level (XML implementation only).
- ◆ Each element containing an international string supports i18 attributes (CCL).
- ◆ Each ancestor of an element containing an international string supports i18 attributes (PCL).
- ◆ Children of wrapper elements: mandatory children come first, they are in a specific order, optional (and in most case multiple) elements follow, they can be inserted in an arbitrary order (XML implementation only).
- ◆ Each wrapper element has an extension point as its last child element (XML implementation only).

## 11.4 Processing Model Terminology

For many components of the G2-Standards this specification provides also a processing model. Find below how these processing instructions should be read.

- ◆ A Processing Model provides rules for the proper processing of metadata properties and their values. Each rule may be divided into steps.
- ◆ Each rule gets an integer number assigned, steps for this rules are indicated as decimals to this number. Example: rule 12, step 3 = 12.3
- ◆ Many rules can be considered like a function in programming, hence as a sequence of processing steps in the scope of a block. These terms will be used for defining the rules and are based on this basic layout:
  - “quit” = the processing of this function stops at this step and quits the current context to the calling context.
  - “quit and return ...” = see “quit”, plus: a value of “...” is returned to the calling context.
  - “if ... :” = a condition is expressed and right to the colon the processing that results from meeting this condition.
  - If the condition is NOT met the default processing is “proceed to the next step of this processing rule”. A specific processing for this case is preceded by the term “otherwise”.

## 11.5 Component Structure Format

**Table 10** describes the component (element and datatype) specifications of the G2 data model. This table is divided into two sections:

- ◆ The upper section contains the specification of generic properties of the component.
- ◆ The lower section(s) contain the specification of the component based on the W3C XML Schema 1.0 (XMLSCHEMA-1.0) specifications. This section may contain different specifications at the Core Conformance Level (CCL) and the Power Conformance Level (PCL) of the G2 data model.

Descriptions of the individual specifications can be found in **Table 10**.

*Table 10. Component Structure Format*

(XML) Data Model	Defines a high-level data model for this component. The value is one out of: simple datatype/complex datatype/element/attribute group.
Namespace (Prefix)	Namespace for the name of this component. Is either <i>nar</i> for the generic G2-Standards namespace or a prefix for any other namespace. Which prefix is assigned to which namespace is defined by a heading section of a G2-Standard specification document.
Name	The technical reference of the component (must align with the name in the XML Schema).
Title	The natural-language label of the component.
Definition	A concise definition of the semantics of the component.
User Note(s)	Any notes addressing the (end-)user of the component with a focus on its proper use.
Implementation Note(s)	Any notes addressing the implementer of the component into any technical system.
XML Schema Spec	At: Both CCL and PCL / CCL / PCL; indicates at which conformance levels this XML Schema specification applies.
Datatype	The XML Schema datatype or any datatype defined by a G2-Standard.
Internally Ctrl Values	A definition of one or more values if they are controlled by the XML Schema, e.g. an enumeration or regular expression.
Externally Ctrl Values	A definition of any controlled vocabulary with values to be (exclusively) used with this component.
Attribute(s)	One or more XML attributes defined for this component if it is either a complex datatype, an element, or an attribute group.
Child Element(s)	One or more child elements defined for this component if it is either a complex datatype or an element.
XML Schema Note(s)	Any notes regarding the implementation of this component into the XML Schema of this G2-Standard.
Example(s)	One or more XML snippets showing use-cases for this component.



## 11.6 Element Definitions

### 11.6.1 Access

Table 11. Access

(XML) Data Model	Element
Namespace (prefix)	nar
Name	access
Title	Access
Definition	Ways to access the place, including directions.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>BlockType</b> (page 226)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



## 11.6.2 Access Status

Table 12. Access Status

(XML) Data Model	Element
Namespace (prefix)	nar
Name	accessStatus
Title	Access Status
Definition	An indication of the accessibility of the event.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">QCodePropType</a> (page 251)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.3 Accountable Person

Table 13. Accountable Person

(XML) Data Model	Element
Namespace (prefix)	nar
Name	accountable
Title	Accountable Person
Definition	An individual accountable for the content in legal terms.
User Note(s)	This property answers to a legal issue. In some countries (e.g. Germany, Sweden) it is needed to designate a person accountable for any legal issue related to the published content. The full translation from the German term is: accountable person in terms of the press law - (For reference in German: Verantwortlich im Sinne des Presserechts -acronym = ViSdP), in Swedish it is called "Ansvarig utgivare". In practice today, a news provider may send out a message each day which indicates the "accountable person". This may work for traditional feed services, but fails with profiled services (content selections) which filter such messages. The solution is to include this information in the Items themselves.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">FlexPersonPropType</a> (page 241)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.4 Address Line

Table 14. Address Line

(XML) Data Model	Element
Namespace (prefix)	nar
Name	line
Title	Address Line
Definition	A line of address information, in the format expected by a recipient postal service. City, country area, country and postal code are expressed separately.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>IntlStringType</b> (page 245)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.5 Affiliation

Table 15. Affiliation

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	affiliation		
Title	Affiliation		
Definition	An affiliation of the person with an organisation.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>FlexOrganisationPropType</b> (page 239)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>timeValidityAttributes</b> (page 261)</li> </ul>	<b>Name</b>	<b>Datatype</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.6 Alternative Identifier

Table 16. Alternative Identifier

(XML) Data Model	Element
Namespace (prefix)	nar
Name	altId
Title	Alternative Identifier
Definition	Alternative identifier allocated to the content.
User Note(s)	If there is more than one alternative identifier, they SHOULD be qualified using the type qualifier to distinguish between different identification schemes.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">IntlStringType</a> (page 245).
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ type (0..1); <a href="#">QCodeType</a> (page 252); A qualifier which indicates the context within which the alternative identifier has been allocated.</li> <li>▪ environment (0..1); <a href="#">QCodeListType</a> (page 250); A qualifier which indicates the business environment in which the identifier can be used to access the content</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.7 Alternative Locator

Table 17. Alternative Locator

(XML) Data Model	Element
Namespace (prefix)	nar
Name	altLoc
Title	Alternative Locator
Definition	An alternative location of the asset representing the content.
User Note(s)	If there is more than one alternative locator, they SHOULD be qualified using the type attribute to distinguish between different identification schemes.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>IRIType</b> (page 246)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ type (0..1); <b>QCodeType</b> (page 252); A qualifier which indicates the context within which the alternative locator has been allocated.</li> <li>▪ role (0..1); <b>QCodeType</b> (page 252); A refinement of the semantics or business purpose of the property.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.8 Alternative Representation

Table 18. Alternative Representation

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	altRep		
Title	Alternative Representation		
Definition	An IRI which, upon dereferencing provides an alternative representation of the Item.		
User Note(s)	This property is particularly useful if the Item is available in different formats (for example NewsML 1, IIM or NITF) or with different levels of details (for instance with different granularity of metadata).		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>IRIType</b> (page 246)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ representation (0..1); <b>QCodeType</b> (page 252); A qualifier which specifies the way the targetItem is represented at this location.</li> <li>▪ contentType (0..1); XML Schema string; The IANA (Internet Assigned Numbers Authority) MIME type of the target resource.</li> <li>▪ format (0..1); QCodeType; A refinement of a generic content type (i.e. IANA MIME type).</li> <li>▪ size (0..1); XML Schema nonNegativeInteger; The size in bytes of the target resource.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>timeValidityAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			

## 11.6.9 Anchor

Table 19. Anchor

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	a		
Title	Anchor		
Definition	An anchor for inline linking like in HTML.		
User Note(s)			
Implementation Note(s)	This element is modelled after its XHTML 1.0 counterpart.		
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ class (0..1); XML Schema String; An equivalent of the HTML class attribute.</li> <li>▪ href (0..1); <b>IRIType</b> (page 246); An equivalent of the HTML href attribute.</li> <li>▪ hreflang (0..1); XML Schema NMTOKEN; An equivalent of the HTML hreflang attribute.</li> <li>▪ rel (0..1); XML Schema string; An equivalent of the HTML rel attribute.</li> <li>▪ rev (0..1); XML Schema string; An equivalent of the HTML rev attribute.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	modified (0..1)	DateOptTimeType
		Name	Datatype
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .
	Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>span</b> (page 208) (0..unbounded)</li> <li>▪ <b>ruby</b> (page 198) (0..unbounded)</li> <li>▪ <b>inline</b> (page 135) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>	
		XML Schema Note(s)	
Implementation of the attributes aligns with the XHTML 1.0 specs.			
Example(s)			



### 11.6.10 Assertion

Table 20. Assertion

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	assert		
Title	Assertion		
Definition	An assertion about a concept; may include many details.		
User Note(s)	The assertion about the concept may be used to merge multiple occurrences of concept details in properties into a single place or to extend the details of an assertion beyond the limited details other properties can provide.		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>qcode (0..1); <b>QCodeType</b> (page 252); A qualified code identifying the concept the assertion is made about.</li> </ul> <p>Or</p> <ul style="list-style-type: none"> <li>literal (0..1); XML Schema normalizedString; A free-text value identifying the concept the assertion is made about.</li> </ul> <p>The use of qcode and literal is mutually exclusive, one of them MUST be used.</p>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	Name	Datatype
xml:lang (0..1)		XML Schema language	
dir (0..1)		XML Schema string: enumeration <i>ltr, rtl</i> .	
Child Element(s)	<ul style="list-style-type: none"> <li>Hint and Extension Point (0..unbounded). Properties from the NAR namespace or from another XML namespace may be added.</li> </ul> <p>The purpose of properties from the NAR namespace is to add a set of hints, i.e. properties extracted from the G2 item target resource. These properties must be added this way:</p> <ul style="list-style-type: none"> <li>- Any property under &lt;itemMeta&gt; and &lt;contentMeta&gt; may be used directly under the extension point</li> <li>- All other properties require the full path excluding only the item's root element.</li> </ul>		
XML Schema Note(s)			
Example(s)			



### 11.6.11 Assigned To

Table 21. Assigned To

(XML) Data Model	Element
Namespace (prefix)	nar
Name	assignedTo
Title	Assigned To
Definition	The party which is assigned to cover the event and to produce the planned G2 item
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Flex1PartyPropType</a> (page 236)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.12 Audience

Table 22. Audience

(XML) Data Model	Element
Namespace (prefix)	nar
Name	audience
Title	Audience
Definition	An intended audience for the content.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>AudienceType</b> (page 225)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.13 Bag

Table 23. Bag

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	bag		
Title	Bag		
Definition	A group of existing concepts which express a new concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	modified (0..1)	DateOptTimeType
		Name	Datatype
		xml:lang (0..1)	XML Schema language
dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .		
Child Element(s)	▪ <b>bit</b> (page 64) (1..unbounded)		
XML Schema Note(s)			
Example(s)			



### 11.6.14 Bag Item

Table 24. Bag Item

(XML) Data Model	Element
Namespace (prefix)	nar
Name	bit
Title	Bag Item
Definition	An individual concept, part of a composite concept expressed by a bag.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">QCodePropType</a> (page 251)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.15 Broader

Table 25. Broader

(XML) Data Model	Element
Namespace (prefix)	nar
Name	broader
Title	Broader
Definition	An identifier of a more generic concept.
User Note(s)	<p><i>rank</i> (available at the PCL only) is suitable for use in a Knowledge Item representing a scheme. It is used when it is important that the Child Elements of a particular term are displayed in a user interface in a predefined order.</p> <p>For example, the major currencies could be given a rank of "1", while all other currencies could be given a rank of "2". Terms of the same rank are ordered alphabetically by name if this is available. If the name is not available, the terms are ordered by code value. Terms without a rank are treated as if they all have the same rank, which is higher than the rank of all other terms.</p> <p>The same concept may have different ranks in different concept trees. A lower rank results in a placement earlier in a display.</p>
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>RelatedConceptType</b> (page 255)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>rank (0..1); XML Schema nonNegativeInteger; Specifies the rank of the concept among the children of a given broader concept.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.16 By

Table 26. By

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	by		
Title	By		
Definition	A natural-language statement about the creator (author, photographer etc.) of the content.		
User Note(s)	The <i>by</i> label provides a natural-language statement of the author/creator information (commonly called the byline); it may include a byline title, i.e. the author's job title. Examples of bylines are RUPAK DE CHOWDHURI (a person), isotype.com (a provider) or STR (a stringer). It is up to the provider to decide if the label starts with a word like "By".		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>Label1Type</b> (page 247)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>rankingAttributes</b> (page 262)	<b>Name</b> rank (0..1)	<b>Datatype</b> XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.17 Capacity

Table 27. Capacity

(XML) Data Model	Element
Namespace (prefix)	nar
Name	capacity
Title	Capacity
Definition	Total capacity of the place in natural language.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Label1Type</a> (page 247)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.18 Catalog

Table 28. Catalog

(XML) Data Model	Element									
Namespace (prefix)	nar									
Name	catalog									
Title	Catalog									
Definition	A local or remote catalog.									
User Note(s)										
Implementation Note(s)										
XML Schema Spec	At: PCL									
Datatype										
Internally Ctrl Values										
Externally Ctrl Values										
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>additionalInfo</b> (0..1); <b>IRIType</b> (page 246); A pointer to some additional information about the Catalog, especially its evolution and latest version.</li> </ul>									
	▪ <b>editAttributes</b> (page 261)	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType
		Name	Datatype							
		id (0..1)	XML Schema ID							
creator (0..1)	QCodeType									
modified (0..1)	DateOptTimeType									
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>title</b> (page 148) (0..unbounded)</li> </ul>									
	<ul style="list-style-type: none"> <li>▪ <b>scheme</b> (page 204) (1..unbounded)</li> </ul>									
XML Schema Note(s)										
Example(s)										



### 11.6.19 Channel of Remote Content

Table 29. Channel of Remote Content

(XML) Data Model	Element
Namespace (prefix)	nar
Name	channel
Title	Channel of Remote Content
Definition	Information about a specific content channel.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	

Table 29. Channel of Remote Content (Continued)

	▪ chnlid (0..1); XML Schema positiveInteger; A logical identifier of the channel																																																
	▪ type (0..1); <b>QCodeType</b> (page 252); The media type of the data conveyed by the channel.																																																
	▪ role (0..1); <b>QCodeType</b> (page 252); The role the data of this channel plays in the scope of the full content.																																																
Attribute(s)	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>Word Count</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Width</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Width Unit</td> <td>QCodeType</td> </tr> <tr> <td>Image Height</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Height Unit</td> <td>QCodeType</td> </tr> <tr> <td>Image Orientation</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Colour Space</td> <td>QCodeType</td> </tr> <tr> <td>Resolution</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Duration</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Unit of Duration</td> <td>QCodeType</td> </tr> <tr> <td>Audio Codec</td> <td>QCodeType</td> </tr> <tr> <td>Audio Bit Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Variable Bit Rate flag</td> <td>XML Schema boolean</td> </tr> <tr> <td>Audio Sample Size</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Sample Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Channels</td> <td>QCodeType</td> </tr> <tr> <td>Video Codec</td> <td>QCodeType</td> </tr> <tr> <td>Video Average Bit Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Video Variable Bit Rate flag</td> <td>XML Schema boolean</td> </tr> <tr> <td>Video Frame Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Video Scan Technique</td> <td>enumeration progressive/interlaced</td> </tr> <tr> <td>Video Aspect Ratio</td> <td>XML Schema normalizedString</td> </tr> <tr> <td>Video Sampling Method</td> <td>XML Schema normalizedString</td> </tr> </tbody> </table>	Name	Datatype	Word Count	XML Schema nonNegativeInteger	Image Width	XML Schema nonNegativeInteger	Image Width Unit	QCodeType	Image Height	XML Schema nonNegativeInteger	Image Height Unit	QCodeType	Image Orientation	XML Schema nonNegativeInteger	Image Colour Space	QCodeType	Resolution	XML Schema positiveInteger	Duration	XML Schema nonNegativeInteger	Unit of Duration	QCodeType	Audio Codec	QCodeType	Audio Bit Rate	XML Schema positiveInteger	Audio Variable Bit Rate flag	XML Schema boolean	Audio Sample Size	XML Schema positiveInteger	Audio Sample Rate	XML Schema positiveInteger	Audio Channels	QCodeType	Video Codec	QCodeType	Video Average Bit Rate	XML Schema positiveInteger	Video Variable Bit Rate flag	XML Schema boolean	Video Frame Rate	XML Schema positiveInteger	Video Scan Technique	enumeration progressive/interlaced	Video Aspect Ratio	XML Schema normalizedString	Video Sampling Method	XML Schema normalizedString
	Name	Datatype																																															
Word Count	XML Schema nonNegativeInteger																																																
Image Width	XML Schema nonNegativeInteger																																																
Image Width Unit	QCodeType																																																
Image Height	XML Schema nonNegativeInteger																																																
Image Height Unit	QCodeType																																																
Image Orientation	XML Schema nonNegativeInteger																																																
Image Colour Space	QCodeType																																																
Resolution	XML Schema positiveInteger																																																
Duration	XML Schema nonNegativeInteger																																																
Unit of Duration	QCodeType																																																
Audio Codec	QCodeType																																																
Audio Bit Rate	XML Schema positiveInteger																																																
Audio Variable Bit Rate flag	XML Schema boolean																																																
Audio Sample Size	XML Schema positiveInteger																																																
Audio Sample Rate	XML Schema positiveInteger																																																
Audio Channels	QCodeType																																																
Video Codec	QCodeType																																																
Video Average Bit Rate	XML Schema positiveInteger																																																
Video Variable Bit Rate flag	XML Schema boolean																																																
Video Frame Rate	XML Schema positiveInteger																																																
Video Scan Technique	enumeration progressive/interlaced																																																
Video Aspect Ratio	XML Schema normalizedString																																																
Video Sampling Method	XML Schema normalizedString																																																
	▪ <b>newsContentCharacteristics</b> (page 264)																																																
Child Element(s)																																																	
XML Schema Note(s)																																																	
Example(s)																																																	



### 11.6.20 Channel for News Message

Table 30. Channel for News Message

(XML) Data Model	Element
Namespace (prefix)	nar
Name	channel
Title	Channel for News Message
Definition	A transmission channel used by the message.
User Note(s)	A channel identifier is used to provide recipients with information for selecting, routing, or handling otherwise the content of the message. The channels represent streams in a multiplex: a message may be sent on different channels – e.g. one for text, one for pictures – and each reception point will be able to filter on channel values. The structure of this string is not specified by the IPTC.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	

## 11.6.21 Concept

Table 31. Concept Definition

(XML) Data Model	Element													
Namespace (prefix)	nar													
Name	concept													
Title	Concept													
Definition	A set of properties defining a concept.													
User Note(s)														
Implementation Note(s)														
XML Schema Spec	At: Both CCL and PCL													
Datatype														
Internally Ctrl Values														
Externally Ctrl Values														
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>conceptId</b> (page 74) (1)</li> <li>▪ <b>type</b> (page 215) (0..1)</li> <li>▪ <b>name</b> (page 76) (1..unbounded)</li> <li>▪ <b>definition</b> (page 73) (0..unbounded)</li> <li>▪ <b>note</b> (page 165) (0..unbounded)</li> <li>▪ <b>facet</b> (page 121) (0..unbounded)</li> <li>▪ <b>remoteInfo</b> (page 194) (0..unbounded)</li> </ul>													
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>Concept Relationships Group</b> (page 220) (0..1)</li> </ul>	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>broader</b> (0..unbounded)</td> <td>65</td> </tr> <tr> <td><b>narrower</b> (0..unbounded)</td> <td>160</td> </tr> <tr> <td><b>related</b> (0..unbounded)</td> <td>189</td> </tr> <tr> <td><b>sameAs</b> (0..unbounded)</td> <td>202</td> </tr> </tbody> </table>	Element Name	Page	<b>broader</b> (0..unbounded)	65	<b>narrower</b> (0..unbounded)	160	<b>related</b> (0..unbounded)	189	<b>sameAs</b> (0..unbounded)	202		
		Element Name	Page											
		<b>broader</b> (0..unbounded)	65											
		<b>narrower</b> (0..unbounded)	160											
	<b>related</b> (0..unbounded)	189												
	<b>sameAs</b> (0..unbounded)	202												
	<ul style="list-style-type: none"> <li>▪ <b>Entity Details Group</b> (page 220) (0..1)</li> </ul>	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>geoAreaDetails</b> (1)</td> <td>129</td> </tr> <tr> <td><b>organisationDetails</b> (1)</td> <td>170</td> </tr> <tr> <td><b>personDetails</b> (1)</td> <td>177</td> </tr> <tr> <td><b>POIDetails</b> (1)</td> <td>179</td> </tr> <tr> <td><b>objectDetails</b> (1)</td> <td>166</td> </tr> </tbody> </table>	Element Name	Page	<b>geoAreaDetails</b> (1)	129	<b>organisationDetails</b> (1)	170	<b>personDetails</b> (1)	177	<b>POIDetails</b> (1)	179	<b>objectDetails</b> (1)	166
		Element Name	Page											
		<b>geoAreaDetails</b> (1)	129											
		<b>organisationDetails</b> (1)	170											
<b>personDetails</b> (1)		177												
<b>POIDetails</b> (1)	179													
<b>objectDetails</b> (1)	166													
<ul style="list-style-type: none"> <li>▪ <b>eventDetails</b> (page 115) (0..1)</li> </ul>														
<ul style="list-style-type: none"> <li>▪ Extension Point (0..1). Any set of provider-defined properties.</li> </ul>														
XML Schema Note(s)														
Example(s)														





### 11.6.22 Concept Definition

Table 32. Concept Definition

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	definition		
Title	Concept Definition		
Definition	A natural-language definition of the semantics of the concept. This definition is normative only for the scope of the use of this concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>BlockType</b> (page 226)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>timeValidityAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.23 Concept Identifier

Table 33. Concept Identifier

(XML) Data Model	Element
Namespace (prefix)	nar
Name	conceptId
Title	Concept Identifier
Definition	The preferred unambiguous identifier for the concept.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>ConceptIdType</b> (page 227)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.24 Concept Item

Table 34. Concept Item

(XML) Data Model	Element
Namespace (prefix)	nar
Name	conceptItem
Title	Concept Item
Definition	An Item containing information about a concept.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>AnylItemType</b> (page 223)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>contentMeta</b> (page 80) (0..1)
	▪ <b>assert</b> (page 60) (0..unbounded)
	▪ <b>inlineRef</b> (page 138) (0..unbounded)
	▪ <b>concept</b> (page 72) (0..1)
XML Schema Note(s)	
Example(s)	



### 11.6.25 Concept Name

Table 35. Concept Name

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	name		
Title	Concept Name		
Definition	A natural-language name for the concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>IntlStringType</b> (page 245).		
Internally Ctrl Values			
Externally Ctrl Values	Recommended IPTC NewsCodes for the <i>part</i> attribute: <a href="http://cv.iptc.org/newscodes/namepart/">http://cv.iptc.org/newscodes/namepart/</a>		
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the name.</li> <li>▪ part (0..1); <b>QCodeType</b> (page 252); Specifies which part of a full name this property provides.</li> </ul>		
	▪ <b>timeValidityAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		validfrom (0..1)	DateOptTimeType
	validto (0..1)	DateOptTimeType	
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.26 Concept Set

Table 36. Concept Set

(XML) Data Model	Element
Namespace (prefix)	nar
Name	conceptSet
Title	Concept Set
Definition	An unordered set of concepts.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>concept</b> (page 72) (0..unbounded)
XML Schema Note(s)	
Example(s)	



### 11.6.27 Confirmation

Table 37. Confirmation

(XML) Data Model	Element
Namespace (prefix)	nar
Name	confirmation
Title	Confirmation
Definition	Flag to indicate if start and/or end date and times are confirmed.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QCodePropType</b> (page 251)
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/eventdateconfirm/">http://cv.iptc.org/newscodes/eventdateconfirm/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



## 11.6.28 Contact Information

Table 38. Contact Information

(XML) Data Model	Element
Namespace (prefix)	nar
Name	contactInfo
Title	Contact Information
Definition	Information to get in contact with the entity expressed by the wrapping property.
User Note(s)	The <i>role</i> attribute addresses the role of the full set of contact information with regards to the entity defined by the concept. Examples: "privateOffice" vs "companyOffice" or "GlobalHeadquarters" vs "localHeadquarterUK".
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes for the "role" of an event's contact information: <a href="http://cv.iptc.org/newscodes/eventcontactinfo/">http://cv.iptc.org/newscodes/eventcontactinfo/</a>
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <i>role</i> (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the set of contact information.</li> </ul>
Child Element(s)	▪ <b>email</b> (page 112) (0..unbounded)
	▪ <b>im</b> (page 142) (0..unbounded)
	▪ <b>phone</b> (page 178) (0..unbounded)
	▪ <b>fax</b> (page 122) (0..unbounded)
	▪ <b>web</b> (page 219) (0..unbounded)
	▪ <b>address</b> (page 180) (0..unbounded)
	▪ <b>note</b> (page 165) (0..unbounded)
▪ Extension Point (0..unbounded). Any set of provider-defined properties.	
XML Schema Note(s)	
Example(s)	



### 11.6.29 Content Metadata for Concept Items

Table 39. Content Metadata for Concept Items

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	contentMeta		
Title	Content Metadata for Concept Items		
Definition	Content Metadata for a Concept Item		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
Child Element(s)	▪ <b>Administrative Metadata Group</b> (page 221) (0..1)	▪ <b>icon</b> (page 134) (0..unbounded); If multiple icon elements are present within a single contentMeta or partMeta property they MUST represent the same visual content, only differentiated by rendition, contentType or format.	
		<b>Element Name</b>	<b>Page</b>
		<b>audience</b> (0..unbounded)	62
		<b>contributor</b> (0..unbounded)	87
		<b>creator</b> (0..unbounded)	92
		<b>contentCreated</b> (0..1)	94
		<b>contentModified</b> (0..1)	95
		<b>located</b> (0..unbounded)	155
		<b>infoSource</b> (0..unbounded)	143
		<b>urgency</b> (0..1)	216
	<b>exclAudience</b> (0..unbounded)	118	
	<b>altId</b> (0..unbounded)	56	
	▪ Extension Point (0..unbounded). Any set of provider-defined properties.		
XML Schema Note(s)			
Example(s)			



### 11.6.30 Content Metadata for Knowledge Items

Table 40. Content Metadata for Knowledge Items

(XML) Data Model	Element			
Namespace (prefix)	nar			
Name	contentMeta			
Title	Content Metadata for Knowledge Items			
Definition	Content Metadata for a Knowledge Item.			
User Note(s)				
Implementation Note(s)				
XML Schema Spec	At: PCL			
Datatype				
Internally Ctrl Values				
Externally Ctrl Values				
Attribute(s)	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>	
		xml:lang (0..1)	XML Schema language	
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .	
Child Element(s)	▪ <b>icon</b> (page 134) (0..unbounded); If multiple icon elements are present within a single contentMeta or partMeta property they MUST represent the same visual content, only differentiated by rendition, contentType or format.			
		▪ <b>Administrative Metadata Group</b> (page 221) (0..1)	<b>Element Name</b>	<b>Page</b>
			<b>audience</b> (0..1)	62
			<b>contributor</b> (0..unbounded)	87
			<b>creator</b> (0..unbounded)	92
			<b>contentCreated</b> (0..1)	94
			<b>contentModified</b> (0..1)	95
			<b>located</b> (0..unbounded)	155
			<b>infoSource</b> (0..unbounded)	143
			<b>urgency</b> (0..1)	216
			<b>exclAudience</b> (0..unbounded)	118
		<b>altId</b> (0..unbounded)	56	
		▪ <b>Knowledge Descriptive Metadata Group</b> (page 221) (0..1)	<b>Element Name</b>	<b>Page</b>
			<b>language</b> (0..unbounded)	151
<b>description</b> (0..unbounded)	107			
<b>keyword</b> (0..unbounded)	149			
		<b>subject</b> (0..unbounded)	210	
	▪ Extension Point (0..unbounded). Any set of provider-defined properties.			
XML Schema Note(s)				
Example(s)				



### 11.6.31 Content Metadata for News Items

Table 41. Content Metadata for News Items

(XML) Data Model	Element			
Namespace (prefix)	nar			
Name	contentMeta			
Title	Content Metadata for News Items			
Definition	A set of properties about the content.			
User Note(s)				
Implementation Note(s)				
XML Schema Spec	At: PCL			
Datatype				
Internally Ctrl Values				
Externally Ctrl Values				
Attribute(s)	▪ <a href="#">i18nAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>	
		xml:lang (0..1)	XML Schema language	
		dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .	
Child Element(s)	▪ <a href="#">icon</a> (page 134) (0..unbounded); If multiple icon elements are present within a single contentMeta or partMeta property they MUST represent the same visual content, only differentiated by rendition, contentType or format.			
		▪ <a href="#">Administrative Metadata Group</a> (page 221) (0..1)	<b>Element Name</b>	<b>Page</b>
			<a href="#">audience</a> (0..unbounded)	62
			<a href="#">contributor</a> (0..unbounded)	87
			<a href="#">creator</a> (0..unbounded)	92
			<a href="#">contentCreated</a> (0..1)	94
			<a href="#">contentModified</a> (0..1)	95
			<a href="#">located</a> (0..unbounded)	155
			<a href="#">infoSource</a> (0..unbounded)	143
			<a href="#">urgency</a> (0..1)	216
			<a href="#">exclAudience</a> (0..unbounded)	118
		<a href="#">altId</a> (0..unbounded)	56	
		▪ <a href="#">Descriptive Metadata Group</a> (page 221) (0..1)	<b>Element Name</b>	<b>Page</b>
			<a href="#">by</a> (0..unbounded)	66
<a href="#">creditline</a> (0..unbounded)	93			
<a href="#">dateline</a> (0..unbounded)	104			
<a href="#">description</a> (0..unbounded)	107			
<a href="#">genre</a> (0..unbounded)	127			
<a href="#">headline</a> (0..unbounded)	133			
<a href="#">keyword</a> (0..unbounded)	149			
<a href="#">language</a> (0..unbounded)	151			
<a href="#">slugline</a> (0..unbounded)	207			
<a href="#">subject</a> (0..unbounded)	210			
▪ Extension Point (0..unbounded). Any set of provider-defined properties.				
XML Schema Note(s)				
Example(s)				



### 11.6.32 Content Metadata for Package Items

Table 42. Content Metadata for Package Items

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	contentMeta		
Title	Content Metadata for Package Items		
Definition	A set of properties about the content.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">i18nAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .



Table 42. Content Metadata for Package Items (Continued)

	<ul style="list-style-type: none"> <li>▪ <b>icon</b> (page 134) (0..unbounded); If multiple icon elements are present within a single contentMeta or partMeta property they MUST represent the same visual content, only differentiated by rendition, contentType or format.</li> </ul>																							
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>Administrative Metadata Group</b> (page 221) (0..1)</li> </ul>	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>audience</b> (0..unbounded)</td> <td>62</td> </tr> <tr> <td><b>contributor</b> (0..unbounded)</td> <td>87</td> </tr> <tr> <td><b>creator</b> (0..unbounded)</td> <td>92</td> </tr> <tr> <td><b>contentCreated</b> (0..1)</td> <td>94</td> </tr> <tr> <td><b>contentModified</b> (0..1)</td> <td>95</td> </tr> <tr> <td><b>located</b> (0..unbounded)</td> <td>155</td> </tr> <tr> <td><b>infoSource</b> (0..unbounded)</td> <td>143</td> </tr> <tr> <td><b>urgency</b> (0..1)</td> <td>216</td> </tr> <tr> <td><b>exclAudience</b> (0..unbounded)</td> <td>118</td> </tr> <tr> <td><b>altId</b> (0..unbounded)</td> <td>56</td> </tr> </tbody> </table>	Element Name	Page	<b>audience</b> (0..unbounded)	62	<b>contributor</b> (0..unbounded)	87	<b>creator</b> (0..unbounded)	92	<b>contentCreated</b> (0..1)	94	<b>contentModified</b> (0..1)	95	<b>located</b> (0..unbounded)	155	<b>infoSource</b> (0..unbounded)	143	<b>urgency</b> (0..1)	216	<b>exclAudience</b> (0..unbounded)	118	<b>altId</b> (0..unbounded)	56
		Element Name	Page																					
		<b>audience</b> (0..unbounded)	62																					
		<b>contributor</b> (0..unbounded)	87																					
		<b>creator</b> (0..unbounded)	92																					
		<b>contentCreated</b> (0..1)	94																					
		<b>contentModified</b> (0..1)	95																					
		<b>located</b> (0..unbounded)	155																					
		<b>infoSource</b> (0..unbounded)	143																					
		<b>urgency</b> (0..1)	216																					
	<b>exclAudience</b> (0..unbounded)	118																						
	<b>altId</b> (0..unbounded)	56																						
	<ul style="list-style-type: none"> <li>▪ <b>Descriptive Metadata Group</b> (page 221) (0..1)</li> </ul>	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>by</b> (0..unbounded)</td> <td>66</td> </tr> <tr> <td><b>creditline</b> (0..unbounded)</td> <td>93</td> </tr> <tr> <td><b>dateline</b> (0..unbounded)</td> <td>104</td> </tr> <tr> <td><b>description</b> (0..unbounded)</td> <td>107</td> </tr> <tr> <td><b>genre</b> (0..unbounded)</td> <td>127</td> </tr> <tr> <td><b>headline</b> (0..unbounded)</td> <td>133</td> </tr> <tr> <td><b>keyword</b> (0..unbounded)</td> <td>149</td> </tr> <tr> <td><b>language</b> (0..unbounded)</td> <td>151</td> </tr> <tr> <td><b>slugline</b> (0..unbounded)</td> <td>207</td> </tr> <tr> <td><b>subject</b> (0..unbounded)</td> <td>210</td> </tr> </tbody> </table>	Element Name	Page	<b>by</b> (0..unbounded)	66	<b>creditline</b> (0..unbounded)	93	<b>dateline</b> (0..unbounded)	104	<b>description</b> (0..unbounded)	107	<b>genre</b> (0..unbounded)	127	<b>headline</b> (0..unbounded)	133	<b>keyword</b> (0..unbounded)	149	<b>language</b> (0..unbounded)	151	<b>slugline</b> (0..unbounded)	207	<b>subject</b> (0..unbounded)	210
		Element Name	Page																					
		<b>by</b> (0..unbounded)	66																					
		<b>creditline</b> (0..unbounded)	93																					
		<b>dateline</b> (0..unbounded)	104																					
		<b>description</b> (0..unbounded)	107																					
		<b>genre</b> (0..unbounded)	127																					
		<b>headline</b> (0..unbounded)	133																					
<b>keyword</b> (0..unbounded)		149																						
<b>language</b> (0..unbounded)		151																						
<b>slugline</b> (0..unbounded)	207																							
<b>subject</b> (0..unbounded)	210																							
	<ul style="list-style-type: none"> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>																							
XML Schema Note(s)																								
Example(s)																								



### 11.6.33 Content Provider

Table 43. Content Provider

(XML) Data Model	Element
Namespace (prefix)	nar
Name	provider
Title	Provider
Definition	The party responsible for the management and the release of the Item.
User Note(s)	This corresponds to the publisher of the Item.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">FlexPartyPropType</a> (page 240)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.34 Content Set

Table 44. Content Set

(XML) Data Model	Element
Namespace (prefix)	nar
Name	contentSet
Title	Content Set
Definition	A set of alternate renditions of the Item content.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ original (0..1); XML Schema idref; A local reference to the original piece of content, from which all renditions have been derived.</li> </ul>
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>inlineXML</b> (page 139) (0..unbounded)</li> <li>Or</li> <li>▪ <b>inlineData</b> (page 136) (0..unbounded)</li> <li>Or</li> <li>▪ <b>remoteContent</b> (page 191) (0..unbounded)</li> </ul>
XML Schema Note(s)	
Example(s)	



### 11.6.35 Contributor

Table 45. Contributor

(XML) Data Model	Element
Namespace (prefix)	nar
Name	contributor
Title	Contributor
Definition	A party (person or organisation) which modified or enhanced the content, preferably the name of a person.
User Note(s)	One may specify the role the party plays in the creation of the content (e.g. a caption writer for photos) at the PCL.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	Extends <a href="#">FlexPartyPropType</a> (page 240)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (0..1); <a href="#">QCodeListType</a> (page 250); A refinement of the semantics of the property.</li> <li>▪ jobtitle (0..1); <a href="#">QCodeType</a> (page 252); The job title of the creator in the news provider organisation.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.36 Copyright Holder

Table 46. Copyright Holder

(XML) Data Model	Element
Namespace (prefix)	nar
Name	copyrightHolder
Title	Copyright Holder
Definition	The person or organisation claiming the intellectual property for the content.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">FlexPartyPropType</a> (page 240)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.37 Copyright Notice

Table 47. Copyright Notice

(XML) Data Model	Element
Namespace (prefix)	nar
Name	copyrightNotice
Title	Copyright Notice
Definition	Any necessary copyright notice for claiming the intellectual property for the resource.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">RightsLabelType</a> (page 256)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.38 Country

Table 48. Country

(XML) Data Model	Element
Namespace (prefix)	nar
Name	country
Title	Country
Definition	A country, part of the address.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PropType</b> (page 237)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.39 Country Area

Table 49. Country Area

(XML) Data Model	Element
Namespace (prefix)	nar
Name	area
Title	Country Area
Definition	A subdivision of a country, part of the address.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PropType</b> (page 237)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.40 Creator

Table 50. Creator

(XML) Data Model	Element
Namespace (prefix)	nar
Name	creator
Title	Creator
Definition	A party (person or organisation) which created the resource.
User Note(s)	One may specify the role the party plays in the creation of the content (e.g. a caption writer for photos) at the PCL.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	Extends <a href="#">FlexPartyPropType</a> (page 240)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (0..1); <a href="#">QCodeListType</a> (page 250); A refinement of the semantics of the property.</li> <li>▪ jobtitle (0..1); <a href="#">QCodeType</a> (page 252); The job title of the creator in the news provider organisation.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.41 Credit Line

Table 51. Credit Line

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	creditline		
Title	Credit Line		
Definition	A free-text expression of the credit(s) for the content.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	IntlStringType		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">rankingAttributes</a> (page 262)	<b>Name</b>	<b>Datatype</b>
		rank (0..1)	XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.42 Date Content Created

Table 52. Date Content Created

(XML) Data Model	Element
Namespace (prefix)	nar
Name	contentCreated
Title	Date Content Created
Definition	The date (and optionally the time with the time zone) at which the content was created.
User Note(s)	In the case of a photo or live footage for audio and video, this date (and time) is always the same as the date (and time) of the event covered by the content. In the case of text and any audio and video report about an event, this date (and time) can be different from the date (and time) of the event covered by the content. This date (and time) may also be different from the date (and time) of the creation of an Item holding the content.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>TruncatedDateTimePropType</b> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.43 Date Content Modified

Table 53. Date Content Modified

(XML) Data Model	Element
Namespace (prefix)	nar
Name	contentModified
Title	Date Content Modified
Definition	The date (and optionally the time with the time zone) at which the content was last modified.
User Note(s)	The value of this property should be updated each time the content is modified in any manner, but should not be updated if only metadata are changed.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">TruncatedDateTimePropType</a> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.44 Date Item Embargo Ends

Table 54. Date Item Embargo Ends

(XML) Data Model	Element
Namespace (prefix)	nar
Name	embargoed
Title	Date Item Embargo Ends
Definition	The date and time (with the time zone) before which all versions of the Item are embargoed. If the element is absent, the Item is not embargoed. If the element exists but is empty the end of the embargo is defined by the language in an <b>edNote</b> (page 110) element.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>DateTimeOrNullPropType</b> (page 231)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.45 Date Item First Created

Table 55. Date Item First Created

(XML) Data Model	Element
Namespace (prefix)	nar
Name	firstCreated
Title	Date Item First Created
Definition	The date and time (with the time zone) on which the first version of the Item was created.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">DateTimePropType</a> (page 232)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.46 Date Item Version Created

Table 56. Date Item Version Created

(XML) Data Model	Element
Namespace (prefix)	nar
Name	versionCreated
Title	Date Item Version Created
Definition	The date and time (with the time zone) on which the current version of the Item was created.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">DateTimePropType</a> (page 232)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.47 Date of Birth

Table 57. Date of Birth

(XML) Data Model	Element
Namespace (prefix)	nar
Name	born
Title	Date of Birth
Definition	The date of birth of the person.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">TruncatedDateTimePropType</a> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.48 Date of Death

Table 58. Date of Death

(XML) Data Model	Element
Namespace (prefix)	nar
Name	died
Title	Date of Death
Definition	The date of death of the person.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">TruncatedDateTimePropType</a> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.49 Date of Dissolution

Table 59. Date of Dissolution

(XML) Data Model	Element
Namespace (prefix)	nar
Name	dissolved
Title	Date of Dissolution
Definition	The date of dissolution of the organisation.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">TruncatedDateTimePropType</a> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.50 Date of Foundation

Table 60. Date of Foundation

(XML) Data Model	Element
Namespace (prefix)	nar
Name	founded
Title	Date of Foundation
Definition	The date of foundation/establishment of the organisation.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>TruncatedDateTimePropType</b> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.51 Date of Transmission

Table 61. Date of Transmission

(XML) Data Model	Element
Namespace (prefix)	nar
Name	sent
Title	Date of Transmission
Definition	The date and time (with the time zone) of transmission of the message.
User Note(s)	May not be updated in case of retransmission of the message.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema dateTime
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.52 Dateline

Table 62. Dateline

(XML) Data Model	Element						
Namespace (prefix)	nar						
Name	dateline						
Title	Dateline						
Definition	A natural-language statement of the date and/or place of creation of the content.						
User Note(s)	<p>The dateline provides a natural-language statement of the date and/or place of the news content creation, to be displayed in situations where an abstract of the content is shown (case of search results) or the content is remote.</p> <p>Traditionally a dateline indicates when and where news content is created, not necessarily the time and place relative to the news event.</p> <p>As an example a dateline BAGHDAD, March 26, 2007 (AFP) could head a story about blast in Mosul, because the story was actually written in Baghdad. Also, by tradition a dateline will follow the stylebook of the information provider and possibly leave out certain time and location information that could be useful for specifying searches of a database. Editorial policy dictates the dateline; it is not automatically derivable from other markup (location, date, etc.). The dateline should not end with a separating character (of the kind that separates the dateline from the first sentence in a traditional wire story).</p>						
Implementation Note(s)							
XML Schema Spec	At: PCL						
Datatype	<b>Label1Type</b> (page 247)						
Internally Ctrl Values							
Externally Ctrl Values							
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>rankingAttributes</b> (page 262)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>rank (0..1)</td> <td>XML Schema nonNegativeInteger</td> </tr> </tbody> </table>	Name	Datatype	rank (0..1)	XML Schema nonNegativeInteger	
Name	Datatype						
rank (0..1)	XML Schema nonNegativeInteger						
Child Element(s)							
XML Schema Note(s)							
Example(s)							





### 11.6.53 Dates

Table 63. Dates

(XML) Data Model	Element
Namespace (prefix)	nar
Name	dates
Title	Dates
Definition	All dates pertaining to the event, in particular the start and end date and any recurrence information.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>start</b> (page 209) (1)
	▪ <b>end</b> (page 113) (0..1) Or
	▪ <b>duration</b> (page 109) (0..1)
	▪ <b>confirmation</b> (page 78) (0..1)
	▪ <b>Recurrence Group</b> (see <b>Table 64</b> ) (0..1)
XML Schema Note(s)	
Example(s)	

### 11.6.54 Recurrence Group

This group of properties defines the information required to specify a recurrence set. The recurrence set is the complete set of recurrence instances for a calendar component. The model follows the iCalendar specification [RFC2445].

At least one *rDate* or *rRule* element **MUST** be present. These elements **MUST** come first in the group. Then the *exDate* and *exRule* elements **MAY** be inserted in any order.

Table 64. Recurrence Group Elements

Element Title	Element Name	Card	Described on Page
Recurrence Date	<b>rDate</b>	(0..unbounded)	186
Recurrence Rule	<b>rRule</b>	(0..unbounded)	187
Exclusion Date	<b>exDate</b>	(0..unbounded)	119
Exclusion Rule	<b>exRule</b>	(0..unbounded)	120



### 11.6.55 Date Resource Created

Table 65. Date Resource Created

(XML) Data Model	Element
Namespace (prefix)	nar
Name	created
Title	Date Resource Created
Definition	The date (and optionally the time with the time zone) on which the resource was created.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">TruncatedDateTimePropType</a> (page 257)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.56 Description

Table 66. Description

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	description		
Title	Description		
Definition	A free-form textual description of the content of the item. (For a Knowledge Item the content is its set of concepts as a whole.)		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>BlockType</b> (page 226)		
Internally Ctrl Values			
Externally Ctrl Values	Recommended IPTC NewsCodes for the <i>role</i> attribute: <a href="http://cv.iptc.org/newscodes/descriptionrole/">http://cv.iptc.org/newscodes/descriptionrole/</a>		
Attribute(s)	▪ <b>rankingAttributes</b> (page 262)	<b>Name</b>	<b>Datatype</b>
		rank (0..1)	XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.57 Destination

Table 67. Destination

(XML) Data Model	Element
Namespace (prefix)	nar
Name	destination
Title	Destination
Definition	The point(s) of destination of the message.
User Note(s)	In a broadcast delivery system, the destination is a group of reception points (using a provider-specific syntax, often geographically oriented). This is a way to address customers. Examples are "England", "USA", "Austria/Vienna", "France/Paris/LeParisien". The structure of this string is not specified by the IPTC.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.58 Duration

Table 68. Duration

(XML) Data Model	Element
Namespace (prefix)	nar
Name	duration
Title	Duration
Definition	The period the event will last. The duration is calculated from the date and time of the <b>start</b> (page 209) property.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	xs:duration
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.59 Editorial Note

Table 69. Editorial Note

(XML) Data Model	Element
Namespace (prefix)	nar
Name	edNote
Title	Editorial Note
Definition	A note addressed to the editorial people receiving and processing the Item. If edNote is a child element to plannedCoverage (EventsML-G2) this property provides additional natural language information about the planned coverage.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>BlockType</b> (page 226)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.60 Editorial Service

Table 70. Editorial Service

(XML) Data Model	Element
Namespace (prefix)	nar
Name	service
Title	Editorial Service
Definition	An editorial service to which an Item is assigned to by its provider. If service is a child element to plannedCoverage (EventsML-G2), this property indicates by which editorial service the planned G2 item(s) will be published.
User Note(s)	The values of this property are defined by each provider, and are often associated with the notion of a desk or a feed. Some examples are a “French wire service”, an “international picture service” or a “mobile news service”.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.61 Email Address

Table 71. Email Address

(XML) Data Model	Element
Namespace (prefix)	nar
Name	email
Title	Email Address
Definition	An email address.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">ElectronicAddressType</a> (page 233)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.62 End Date/Time

Table 72. End Date/Time

(XML) Data Model	Element
Namespace (prefix)	nar
Name	end
Title	End Date/Time
Definition	The date (and optionally the time with the time zone) the event ends. This may be an exact or an approximative value.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">ApproximateDateTimePropType</a> (page 224)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.63 Event

Table 73. Event

(XML) Data Model	Element	
Namespace (prefix)	nar	
Name	event	
Title	Event	
Definition	Structured information about an event without a concept identifier.	
User Note(s)		
Implementation Note(s)	This event structure is used within an events wrapper to be plugged into an inlineXML property of a News Item.	
XML Schema Spec	At: Both CCL and PCL	
Datatype		
Internally Ctrl Values		
Externally Ctrl Values		
Attribute(s)		
Child Element(s)	▪ <b>eventDetails</b> (page 115) (1)	
	▪ <b>name</b> (page 76) (1..unbounded)	
	▪ <b>definition</b> (page 73) (0..unbounded)	
	▪ <b>facet</b> (page 121) (0..unbounded)	
	▪ <b>note</b> (page 165) (0..unbounded)	
	▪ <b>Concept Relationships Group</b> (page 220) (1)	<b>Element Name</b>
<b>broader</b> (0..unbounded)		65
<b>narrower</b> (0..unbounded)		160
<b>related</b> (0..unbounded)		189
<b>sameAs</b> (0..unbounded)		202
XML Schema Note(s)		
Example(s)		



### 11.6.64 Event Details

Table 74. Event Details

(XML) Data Model	Element	
Namespace (prefix)	nar	
Name	eventDetails	
Title	Event Details	
Definition	Details about the event.	
User Note(s)		
Implementation Note(s)		
XML Schema Spec	At: Both CCL and PCL	
Datatype		
Internally Ctrl Values		
Externally Ctrl Values		
Attribute(s)		
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>dates</b> (page 105) (1)</li> <li>▪ <b>occurStatus</b> (page 167) (0..1)</li> <li>▪ <b>newsCoverageStatus</b> (page 162) (0..1)</li> <li>▪ <b>registration</b> (page 188) (1..unbounded)</li> <li>▪ <b>accessStatus</b> (page 52) (0..unbounded)</li> <li>▪ <b>subject</b> (page 210) (0..unbounded);</li> <li>▪ <b>location</b> (page 116) (0..unbounded)</li> <li>▪ <b>participant</b> (page 173) (0..unbounded)</li> <li>▪ <b>participationRequirement</b> (page 174) (0..unbounded)</li> <li>▪ <b>organiser</b> (page 171) (0..unbounded)</li> <li>▪ <b>contactInfo</b> (page 79) (0..unbounded)</li> <li>▪ <b>language</b> (page 151) (0..unbounded)</li> <li>▪ <b>newsCoverage</b> (page 161) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>	
	XML Schema Note(s)	
	Example(s)	



### 11.6.65 Event Location

Table 75. Event Location

(XML) Data Model	Element
Namespace (prefix)	nar
Name	location
Title	Event Location
Definition	A location (geographical area or point of interest) in which the event takes place.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">FlexLocationPropType</a> (page 238)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <a href="#">QCodeType</a> (page 252); A refinement on the semantics of the property.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.66 Events Wrapper

Table 76. Events Wrapper

(XML) Data Model	Element
Namespace (prefix)	nar
Name	events
Title	Events Wrapper
Definition	A wrapper for events in a News Item.
User Note(s)	
Implementation Note(s)	This events wrapper is made to be plugged into an inlineXML property of a News Item.
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>Event</b> (page 114) (1..unbounded)
XML Schema Note(s)	
Example(s)	



### 11.6.67 Excluded Audience

Table 77. Excluded Audience

(XML) Data Model	Element
Namespace (prefix)	nar
Name	exclAudience
Title	Excluded Audience
Definition	An excluded audience for the content.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">AudienceType</a> (page 225)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.68 Exclusion Date

Table 78. Exclusion Date

(XML) Data Model	Element
Namespace (prefix)	nar
Name	exDate
Title	Exclusion Date
Definition	An explicit date (and optionally time with the time zone) to be excluded from the recurrence set.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">DateOptTimePropType</a> (page 229)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.69 Exclusion Rule

Table 79. Exclusion Rule

(XML) Data Model	Element
Namespace (prefix)	nar
Name	exRule
Title	Exclusion Rule
Definition	A rule of recurrence exclusion.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>RecurrenceRuleType</b> (page 254)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.70 Facet

Table 80. Facet

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	facet		
Title	Facet		
Definition	An intrinsic property of the concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">FlexPropType</a> (page 242)		
Internally Ctrl Values			
Externally Ctrl Values	The default value and additional values for the rel attribute are defined by the IPTC Facet Relationship NewsCodes - <a href="http://cv.iptc.org/newscodes/facetrelation/">http://cv.iptc.org/newscodes/facetrelation/</a>		
Attribute(s)	<ul style="list-style-type: none"> <li>rel (0..1); <a href="#">QCodeType</a> (page 252); The identifier of the relationship between the current concept (containing the facet) and the concept identified by the facet value. The default value for rel is the "IsA" relationship, this applies also if the rel attribute is omitted.</li> </ul>		
	<ul style="list-style-type: none"> <li><a href="#">timeValidityAttributes</a> (page 261)</li> </ul>	<b>Name</b>	<b>Datatype</b>
		validfrom (0..1)	DateOptTimeType
	validto (0..1)	DateOptTimeType	
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.71 Fax Number

Table 81. Fax Number

(XML) Data Model	Element
Namespace (prefix)	nar
Name	fax
Title	Fax Number
Definition	An international fax number.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">ElectronicAddressType</a> (page 233)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.72 File Name

Table 82. File Name

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	filename		
Title	File Name		
Definition	The recommended file name for this Item.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	XML Schema normalizedString		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">editAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.73 G2 Content Type

Table 83. G2 Content Type

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	g2ContentType		
Title	G2 Content Type		
Definition	The kind of planned G2 item(s).		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	XML Schema String		
Internally Ctrl Values	Any of the G2-Standards specific IANA MIME (see <b>MIME Types</b> on page 49) types like application/vnd.iptc.g2.*item+xml. See: <a href="http://www.iana.org/assignments/media-types/application/">http://www.iana.org/assignments/media-types/application/</a>		
Externally Ctrl Values			
Attribute(s)	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.74 G2 Item Class

Table 84. G2 Item Class

(XML) Data Model	Element
Namespace (prefix)	nar
Name	itemClass
Title	G2 Item Class
Definition	The nature of the planned G2 item(s).
User Note(s)	MUST correspond to the itemClass property of the planned item.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	Any of the G2-Standards specific IANA MIME (see <b>MIME Types</b> on page 49) types such as application/vnd.iptc.g2.*item+xml. See: <a href="http://www.iana.org/assignments/media-types/application/">http://www.iana.org/assignments/media-types/application/</a>
Externally Ctrl Values	Recommended IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/ninature/">http://cv.iptc.org/newscodes/ninature/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.75 Generator Tool

Table 85. Generator Tool

(XML) Data Model	Element
Namespace (prefix)	nar
Name	generator
Title	Generator Tool
Definition	The name and version of the software tool used to generate the Item.
User Note(s)	Where a role IS NOT specified, the Generator Tool applies to the most recent item generation stage. Where a role IS specified, the Generator Tool applies to the item generation stage identified by the role.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	Extends <b>VersionedStringType</b> (page 260)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <b>QCodeType</b> (page 252); Identifies the stage at which this generator was used.
Child Element(s)	
XML Schema Note(s)	
Example(s)	<pre>&lt;!-- Generator: implicit --&gt; &lt;generator versioninfo="00.00.01"&gt;G3:IIM:FH&lt;/generator&gt; &lt;!-- Generator: explicit, by role --&gt; &lt;generator versioninfo="1.22.109" role="gen-   Role:MDN"&gt;Janus&lt;/generator&gt;</pre>



### 11.6.76 Genre

Table 86. Genre

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	genre		
Title	Genre		
Definition	A nature, intellectual or journalistic form of the news content.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">Flex1ConceptPropType</a> (page 235)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">rankingAttributes</a> (page 262)	<b>Name</b>	<b>Datatype</b>
		rank (0..1)	XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.77 Geographic Position

Table 87. Geographic Position

(XML) Data Model	Element
Namespace (prefix)	nar
Name	position
Title	Geographic Position
Definition	The geographic coordinates of the location.
User Note(s)	<p>These properties follow the syntax used by the major geocoders on the Web. Latitudes north of the equator shall be designated by use of the plus sign (+), latitudes south of the equator shall be designated by use of the minus sign (-). The equator shall be designated by use of the plus sign (+).</p> <p>Longitudes east of Greenwich shall be designated by use of the plus sign (+), longitudes west of Greenwich shall be designated by use of the minus sign (-). The Prime Meridian shall be designated by use of the plus sign (+). The 180th meridian shall be designated by use of the minus sign (-).</p> <p>The altitude is given in meters. A positive integer means a position above the zero elevation, a negative value below the zero elevation. In the absence of the <i>gpsdatum</i> attribute, WGS84 is the default system.</p>
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ latitude (1); XML Schema decimal; The latitude in decimal degrees (Positive value = northern latitude, negative value = southern latitude).</li> <li>▪ longitude (1); XML Schema decimal; The longitude in decimal degrees (Positive value = eastern longitude, negative value = western longitude).</li> <li>▪ altitude (0..1); XML Schema integer; The altitude in meters above the zero elevation of the reference system (sea level).</li> <li>▪ gpsdatum (0..1); XML Schema string; The GPS datum associated with the measure.</li> </ul>
Child Element(s)	<ul style="list-style-type: none"> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>
XML Schema Note(s)	
Example(s)	





### 11.6.78 Geopolitical Area Details

Table 88. Geopolitical Area Details

(XML) Data Model	Element
Namespace (prefix)	nar
Name	geoAreaDetails
Title	Geopolitical Area Details
Definition	A set of properties specific for a geopolitical area.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <a href="#">position</a> (page 128) (0..1)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>
XML Schema Note(s)	
Example(s)	



### 11.6.79 Group

Table 89. Group

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	group		
Title	Group		
Definition	A mixed set of group references and links.		
User Note(s)	<ul style="list-style-type: none"> <li>▪ Group Mode: By default the group is “complementary and unordered”. <ul style="list-style-type: none"> <li>▪ Complementary and Unordered: To be used for any kind of supporting content that does not require a sequence to be specified.</li> <li>▪ Complementary and Ordered: The group starts with the first child of the group. To be used for any kind of content which must be displayed or consumed in a particular sequence, expressed by the order of the child elements of the group. The semantics of the role attribute value determine the required processing.</li> <li>▪ Alternatives: To be used if a group contains equivalent pieces of content (e.g. translations of the same news story into different languages). The recipient may pick one or more of these.</li> </ul> </li> <li>▪ Group References and Item References: Can be included in any order, and this order may be relevant or not, depending the value of the mode attribute. Each link aggregates an external resource (Item or Web resource) to the package. Optionally, it indicates the relationship between the group and the target resource plus some additional hints about the resource itself.</li> </ul>		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (1); <b>QCodeType</b> (page 252); The part this group plays within its container.</li> <li>▪ mode (0..unbounded); <b>QCodeType</b> (page 252); An indication whether the elements in the group are complementary and unordered, complementary and ordered or a set of alternative elements.</li> <li>▪ id (1); XML Schema id; The local identifier of the group.</li> <li>▪ creator (0..1); QCodeType; party who has edited the property (or will edit the property)</li> <li>▪ modified (0..1); DateOptTimeType; The date (and optionally the time) when the property was last modified.</li> </ul>		
	<ul style="list-style-type: none"> <li>▪ <b>i18nAttributes</b> (page 261)</li> </ul>	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
	Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>groupRef</b> (page 131) (0..unbounded)</li> <li>▪ <b>itemRef</b> (page 146) (0..unbounded)</li> </ul>	
	XML Schema Note(s)	The local identifier (id) common to all elements at PCL provides a local identifier for groups.	
Example(s)			



### 11.6.80 Group Reference

Table 90. Group Reference

(XML) Data Model	Element
Namespace (prefix)	nar
Name	groupRef
Title	Group Reference
Definition	A reference to a group local to the package.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ idref (1); XML Schema idref; The reference to the id of a local group.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.81 Group Set

Table 91. Group Set

(XML) Data Model	Element
Namespace (prefix)	nar
Name	groupSet
Title	Group Set
Definition	A hierarchical set of groups.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ root (1); XML Schema idref; The reference to a local group acting as the root of the hierarchy of groups.</li> </ul>
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>group</b> (page 130) (1..unbounded)</li> </ul>
XML Schema Note(s)	
Example(s)	



### 11.6.82 Headline

Table 92. Headline

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	headline		
Title	Headline		
Definition	A brief and snappy introduction to the news content, designed to catch the reader's attention.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>Label1Type</b> (page 247)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>rankingAttributes</b> (page 262)	<b>Name</b>	<b>Datatype</b>
		rank (0..1)	XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.83 Icon

Table 93. Icon

(XML) Data Model	Element															
Namespace (prefix)	nar															
Name	icon															
Title	Icon															
Definition	An iconic visual representation of the content.															
User Note(s)																
Implementation Note(s)																
XML Schema Spec	At: PCL															
Datatype																
Internally Ctrl Values																
Externally Ctrl Values																
Attribute(s)	<ul style="list-style-type: none"> <li>rendition (0..1); <b>QCodeType</b> (page 252); Identifies the rendition of the target resource. If the target resource is an item providing multiple renditions then this attribute is used to identify the rendition to be used.</li> </ul>															
	<ul style="list-style-type: none"> <li><b>targetResourceAttributes</b> (page 264)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>href (0..1)</td> <td>IRIType</td> </tr> <tr> <td>residref (0..1)</td> <td>XML Schema string</td> </tr> <tr> <td>version (0..1)</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>contenttype (0..1)</td> <td>XML Schema string</td> </tr> <tr> <td>format (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>size (0..1)</td> <td>XML Schema non NegativeInteger</td> </tr> </tbody> </table>	Name	Datatype	href (0..1)	IRIType	residref (0..1)	XML Schema string	version (0..1)	XML Schema positiveInteger	contenttype (0..1)	XML Schema string	format (0..1)	QCodeType	size (0..1)	XML Schema non NegativeInteger
		Name	Datatype													
		href (0..1)	IRIType													
		residref (0..1)	XML Schema string													
		version (0..1)	XML Schema positiveInteger													
		contenttype (0..1)	XML Schema string													
	format (0..1)	QCodeType														
	size (0..1)	XML Schema non NegativeInteger														
	<ul style="list-style-type: none"> <li><b>editAttributes</b> (page 261)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType						
Name		Datatype														
id (0..1)		XML Schema ID														
creator (0..1)		QCodeType														
modified (0..1)	DateOptTimeType															
Child Element(s)																
XML Schema Note(s)																
Example(s)																



### 11.6.84 Inline Concept Marker

Table 94. Inline Concept Marker

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	inline		
Title	Inline Concept Marker		
Definition	An inline markup tag to be used with any concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	Mixed Content		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <code>class</code> (0..1); XML Schema String; An equivalent of the HTML <code>class</code> attribute.</li> <li>▪ <code>qcode</code> (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as property value. Or</li> <li>▪ <code>literal</code> (0..1); XML Schema <code>normalizedString</code>; A free-text value assigned as property value.</li> <li>▪ <code>type</code> (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as controlled or uncontrolled property value.</li> </ul>		
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		<code>xml:lang</code> (0..1)	XML Schema language
		<code>dir</code> (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		<code>id</code> (0..1)	XML Schema ID
		<code>creator</code> (0..1)	QCodeType
		<code>modified</code> (0..1)	DateOptTimeType
	▪ <b>quantifyAttributes</b> (page 263)	<b>Name</b>	<b>Datatype</b>
		<code>confidence</code> (0..1)	Int100Type
<code>relevance</code> (0..1)		Int100Type	
	<code>why</code> (0..1)	QCodeType	
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>span</b> (page 208) (0..unbounded)</li> <li>▪ <b>ruby</b> (page 198) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>		
	XML Schema Note(s)		
	Example(s)		



### 11.6.85 Inline Data (NewsML-G2 Specific)

Table 95. *Inline Data (NewsML-G2 Specific)*

(XML) Data Model	Element
Namespace (prefix)	nar
Name	inlineData
Title	Inline Data (NewsML-G2 Specific)
Definition	The encoding applied to the content before inclusion.
User Note(s)	
Implementation Note(s)	For the encoding attribute at the CCL only the QCode for "base64" may be used. If the attribute does not exist, this QCode must be assumed as default.. In the absence of the encoding attribute, the content must be plain text, and the content type must be set accordingly.
XML Schema Spec	At PCL
Datatype	XML schema string
Internally Ctrl Values	
Externally Ctrl Values	



Table 95. Inline Data (NewsML-G2 Specific) (Continued)

	<ul style="list-style-type: none"> <li>encoding (0..1); <b>QCodeType</b> (page 252); Specifies the encoding applied to the content before inclusion in the content.</li> </ul>																																																	
	<ul style="list-style-type: none"> <li>contenttype (0..1); XML Schema string; The IANA (Internet Assigned Numbers Authority) MIME type of the target resource.</li> </ul>																																																	
	<ul style="list-style-type: none"> <li>format (0..1); QCodeType; Refinement of a generic content type (i.e. IANA MIME type).</li> </ul>																																																	
Attribute(s)	<ul style="list-style-type: none"> <li><b>newsContentAttributes</b> (page 263)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>rendition (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>generator (0..1)</td> <td>XML Schema string</td> </tr> <tr> <td>generated (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	rendition (0..1)	QCodeType	generator (0..1)	XML Schema string	generated (0..1)	DateOptTimeType																																						
		Name	Datatype																																															
		id (0..1)	XML Schema ID																																															
		rendition (0..1)	QCodeType																																															
		generator (0..1)	XML Schema string																																															
	generated (0..1)	DateOptTimeType																																																
	<ul style="list-style-type: none"> <li><b>newsContentCharacteristics</b> (page 264)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>Word Count</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Width</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Width Unit</td> <td>QCodeType</td> </tr> <tr> <td>Image Height</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Height Unit</td> <td>QCodeType</td> </tr> <tr> <td>Image Orientation</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Colour Space</td> <td>QCodeType</td> </tr> <tr> <td>Resolution</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Duration</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Unit of Duration</td> <td>QCodeType</td> </tr> <tr> <td>Audio Codec</td> <td>QCodeType</td> </tr> <tr> <td>Audio Bit Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Variable Bit Rate flag</td> <td>XML Schema boolean</td> </tr> <tr> <td>Audio Sample Size</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Sample Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Channels</td> <td>QCodeType</td> </tr> <tr> <td>Video Codec</td> <td>QCodeType</td> </tr> <tr> <td>Video Average Bit Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Video Variable Bit Rate flag</td> <td>XML Schema boolean</td> </tr> <tr> <td>Video Frame Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Video Scan Technique</td> <td>enumeration progressive/interlaced</td> </tr> <tr> <td>Video Aspect Ratio</td> <td>XML Schema normalizedString</td> </tr> <tr> <td>Video Sampling Method</td> <td>XML Schema normalizedString</td> </tr> </tbody> </table>	Name	Datatype	Word Count	XML Schema nonNegativeInteger	Image Width	XML Schema nonNegativeInteger	Image Width Unit	QCodeType	Image Height	XML Schema nonNegativeInteger	Image Height Unit	QCodeType	Image Orientation	XML Schema nonNegativeInteger	Image Colour Space	QCodeType	Resolution	XML Schema positiveInteger	Duration	XML Schema nonNegativeInteger	Unit of Duration	QCodeType	Audio Codec	QCodeType	Audio Bit Rate	XML Schema positiveInteger	Audio Variable Bit Rate flag	XML Schema boolean	Audio Sample Size	XML Schema positiveInteger	Audio Sample Rate	XML Schema positiveInteger	Audio Channels	QCodeType	Video Codec	QCodeType	Video Average Bit Rate	XML Schema positiveInteger	Video Variable Bit Rate flag	XML Schema boolean	Video Frame Rate	XML Schema positiveInteger	Video Scan Technique	enumeration progressive/interlaced	Video Aspect Ratio	XML Schema normalizedString	Video Sampling Method	XML Schema normalizedString
		Name	Datatype																																															
		Word Count	XML Schema nonNegativeInteger																																															
		Image Width	XML Schema nonNegativeInteger																																															
		Image Width Unit	QCodeType																																															
		Image Height	XML Schema nonNegativeInteger																																															
		Image Height Unit	QCodeType																																															
		Image Orientation	XML Schema nonNegativeInteger																																															
		Image Colour Space	QCodeType																																															
		Resolution	XML Schema positiveInteger																																															
		Duration	XML Schema nonNegativeInteger																																															
		Unit of Duration	QCodeType																																															
		Audio Codec	QCodeType																																															
		Audio Bit Rate	XML Schema positiveInteger																																															
Audio Variable Bit Rate flag		XML Schema boolean																																																
Audio Sample Size	XML Schema positiveInteger																																																	
Audio Sample Rate	XML Schema positiveInteger																																																	
Audio Channels	QCodeType																																																	
Video Codec	QCodeType																																																	
Video Average Bit Rate	XML Schema positiveInteger																																																	
Video Variable Bit Rate flag	XML Schema boolean																																																	
Video Frame Rate	XML Schema positiveInteger																																																	
Video Scan Technique	enumeration progressive/interlaced																																																	
Video Aspect Ratio	XML Schema normalizedString																																																	
Video Sampling Method	XML Schema normalizedString																																																	
<ul style="list-style-type: none"> <li><b>i18nAttributes</b> (page 261)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>xml:lang (0..1)</td> <td>XML Schema language</td> </tr> <tr> <td>dir (0..1)</td> <td>XML Schema string: enumeration <i>ltr</i>, <i>rtl</i>.</td> </tr> </tbody> </table>	Name	Datatype	xml:lang (0..1)	XML Schema language	dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .																																											
	Name	Datatype																																																
	xml:lang (0..1)	XML Schema language																																																
dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .																																																	
Child Element(s)																																																		
XML Schema Note(s)																																																		
Example(s)																																																		



### 11.6.86 Inline Reference

Table 96. Inline Reference

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	inlineRef		
Title	Inline Reference		
Definition	A concept represented by the content identified by the local identifier(s).		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">Flex1PropType</a> (page 237)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ idrefs (0..1); XML Schema IDREFS; A set of local identifiers of inline content.</li> </ul>		
	▪ <a href="#">quantifyAttributes</a> (page 263)	<b>Name</b>	<b>Datatype</b>
		confidence (0..1)	Int100Type
		relevance (0..1)	Int100Type
	why (0..1)	QCodeType	
Child Element(s)			
XML Schema Note(s)			
Example(s)			

**11.6.87 Inline XML (NewsML-G2 Specific)**Table 97. *Inline XML (NewsML-G2 Specific)*

(XML) Data Model	Element
Namespace (prefix)	nar
Name	inlineXML
Title	Inline XML (NewsML-G2 Specific)
Definition	A rendition of the content using an XML language.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	



Table 97. Inline XML (NewsML-G2 Specific) (Continued)

	<ul style="list-style-type: none"> <li>contenttype (0..1); XML Schema string; The IANA (Internet Assigned Numbers Authority) MIME type of the target resource.</li> <li>format (0..1); QCodeType; Refinement of a generic content type (i.e. IANA MIME type).</li> </ul>																																																
	<table border="1"> <tr> <th>Name</th> <th>Datatype</th> </tr> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>rendition (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>generator (0..1)</td> <td>XML Schema string</td> </tr> <tr> <td>generated (0..1)</td> <td>DateOptTimeType</td> </tr> </table>	Name	Datatype	id (0..1)	XML Schema ID	rendition (0..1)	QCodeType	generator (0..1)	XML Schema string	generated (0..1)	DateOptTimeType																																						
	Name	Datatype																																															
id (0..1)	XML Schema ID																																																
rendition (0..1)	QCodeType																																																
generator (0..1)	XML Schema string																																																
generated (0..1)	DateOptTimeType																																																
Attribute(s)	<table border="1"> <tr> <th>Name</th> <th>Datatype</th> </tr> <tr> <td>Word Count</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Width</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Width Unit</td> <td>QCodeType</td> </tr> <tr> <td>Image Height</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Height Unit</td> <td>QCodeType</td> </tr> <tr> <td>Image Orientation</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Image Colour Space</td> <td>QCodeType</td> </tr> <tr> <td>Resolution</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Duration</td> <td>XML Schema nonNegativeInteger</td> </tr> <tr> <td>Unit of Duration</td> <td>QCodeType</td> </tr> <tr> <td>Audio Codec</td> <td>QCodeType</td> </tr> <tr> <td>Audio Bit Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Variable Bit Rate flag</td> <td>XML Schema boolean</td> </tr> <tr> <td>Audio Sample Size</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Sample Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Audio Channels</td> <td>QCodeType</td> </tr> <tr> <td>Video Codec</td> <td>QCodeType</td> </tr> <tr> <td>Video Average Bit Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Video Variable Bit Rate flag</td> <td>XML Schema boolean</td> </tr> <tr> <td>Video Frame Rate</td> <td>XML Schema positiveInteger</td> </tr> <tr> <td>Video Scan Technique</td> <td>enumeration progressive/interlaced</td> </tr> <tr> <td>Video Aspect Ratio</td> <td>XML Schema normalizedString</td> </tr> <tr> <td>Video Sampling Method</td> <td>XML Schema normalizedString</td> </tr> </table>	Name	Datatype	Word Count	XML Schema nonNegativeInteger	Image Width	XML Schema nonNegativeInteger	Image Width Unit	QCodeType	Image Height	XML Schema nonNegativeInteger	Image Height Unit	QCodeType	Image Orientation	XML Schema nonNegativeInteger	Image Colour Space	QCodeType	Resolution	XML Schema positiveInteger	Duration	XML Schema nonNegativeInteger	Unit of Duration	QCodeType	Audio Codec	QCodeType	Audio Bit Rate	XML Schema positiveInteger	Audio Variable Bit Rate flag	XML Schema boolean	Audio Sample Size	XML Schema positiveInteger	Audio Sample Rate	XML Schema positiveInteger	Audio Channels	QCodeType	Video Codec	QCodeType	Video Average Bit Rate	XML Schema positiveInteger	Video Variable Bit Rate flag	XML Schema boolean	Video Frame Rate	XML Schema positiveInteger	Video Scan Technique	enumeration progressive/interlaced	Video Aspect Ratio	XML Schema normalizedString	Video Sampling Method	XML Schema normalizedString
Name	Datatype																																																
Word Count	XML Schema nonNegativeInteger																																																
Image Width	XML Schema nonNegativeInteger																																																
Image Width Unit	QCodeType																																																
Image Height	XML Schema nonNegativeInteger																																																
Image Height Unit	QCodeType																																																
Image Orientation	XML Schema nonNegativeInteger																																																
Image Colour Space	QCodeType																																																
Resolution	XML Schema positiveInteger																																																
Duration	XML Schema nonNegativeInteger																																																
Unit of Duration	QCodeType																																																
Audio Codec	QCodeType																																																
Audio Bit Rate	XML Schema positiveInteger																																																
Audio Variable Bit Rate flag	XML Schema boolean																																																
Audio Sample Size	XML Schema positiveInteger																																																
Audio Sample Rate	XML Schema positiveInteger																																																
Audio Channels	QCodeType																																																
Video Codec	QCodeType																																																
Video Average Bit Rate	XML Schema positiveInteger																																																
Video Variable Bit Rate flag	XML Schema boolean																																																
Video Frame Rate	XML Schema positiveInteger																																																
Video Scan Technique	enumeration progressive/interlaced																																																
Video Aspect Ratio	XML Schema normalizedString																																																
Video Sampling Method	XML Schema normalizedString																																																
	<table border="1"> <tr> <th>Name</th> <th>Datatype</th> </tr> <tr> <td>xml:lang (0..1)</td> <td>XML Schema language</td> </tr> <tr> <td>dir (0..1)</td> <td>XML Schema string: enumeration <i>ltr</i>, <i>rtl</i>.</td> </tr> </table>	Name	Datatype	xml:lang (0..1)	XML Schema language	dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .																																										
Name	Datatype																																																
xml:lang (0..1)	XML Schema language																																																
dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .																																																
Child Element(s)	<ul style="list-style-type: none"> <li>Plug-in Point (0..1). XML content from any namespace.</li> </ul>																																																
XML Schema Note(s)																																																	
Example(s)																																																	



### 11.6.88 Instance Of

Table 98. Instance Of

(XML) Data Model	Element
Namespace (prefix)	nar
Name	instanceOf
Title	Instance Of
Definition	A frequently updated information object of which this Item is an instance.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PropType</b> (page 237)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.89 Instant Messaging Address

Table 99. Instant Messaging Address

(XML) Data Model	Element
Namespace (prefix)	nar
Name	im
Title	Instant Messaging Address
Definition	An address of an instant messaging system.
User Note(s)	The tech attribute indicates the provider of the service (Yahoo!, Google etc.).
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>ElectronicAddressTechType</b> (page 234)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.90 Information Source

Table 100. Information Source

(XML) Data Model	Element
Namespace (prefix)	nar
Name	infoSource
Title	Information Source
Definition	A party (person or organisation) which originated some information used to create or enhance the content.
User Note(s)	If an entity plays more than one role, the <i>infoSource</i> element has to be included multiple times, with different values of role.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PartyPropType</b> (page 236)
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes for the <i>role</i> attribute: <a href="http://cv.iptc.org/newscodes/infosourcerole/">http://cv.iptc.org/newscodes/infosourcerole/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.91 Item Class

Table 101. Item Class

(XML) Data Model	Element
Namespace (prefix)	nar
Name	itemClass
Title	Item Class
Definition	Indicates the nature of the Item.
User Note(s)	This property gives a hint on the nature of the Item. IPTC values for News Items correspond to the media type of the original content component, i.e. "text", "photo", etc. Concept Items adopt the static value <i>concept</i> . The class of a Package Item reflects the nature of the items it contains, i.e. either one of the values above or the value "composite" which indicates that the package handles items of different natures. A recipient system may use this information to make a coarse selection of Items, based on their nature, without having to inspect the structure.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	Mandatory IPTC NewsCodes for News Items or Package Items: <a href="http://cv.iptc.org/newscodes/ninature/">http://cv.iptc.org/newscodes/ninature/</a> Mandatory IPTC NewsCodes for Concept Items, Knowledge Items or Package Items: <a href="http://cv.iptc.org/newscodes/cinature/">http://cv.iptc.org/newscodes/cinature/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.92 Item Metadata

Table 102. Item Metadata

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	itemMeta		
Title	Item Metadata		
Definition	A set of properties directly associated with the Item.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)			
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>Item Management Group</b> (page 222) (1)</li> </ul>	<b>Element Name</b>	<b>Page</b>
		<b>provider</b> (1)	85
		<b>embargoed</b> (0..1)	96
		<b>firstCreated</b> (0..1)	97
		<b>versionCreated</b> (1)	98
		<b>edNote</b> (0..unbounded)	110
		<b>service</b> (0..unbounded)	111
		<b>filename</b> (0..1)	123
		<b>itemClass</b> (1)	144
		<b>pubStatus</b> (0..1)	185
		<b>role</b> (0..1)	197
		<b>title</b> (0..unbounded)	148
		<b>altRep</b> (0..unbounded)	58
		<b>generator</b> (0..1)	126
		<b>instanceOf</b> (0..unbounded)	141
		<b>memberOf</b> (0..unbounded)	158
		<b>profile</b> (0..1)	183
		<b>signal</b> (0..unbounded)	206
	<ul style="list-style-type: none"> <li>▪ <b>link</b> (page 153) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>		
XML Schema Note(s)			
Example(s)			



### 11.6.93 Item Reference

Table 103. Item Reference

(XML) Data Model	Element
Namespace (prefix)	nar
Name	itemRef
Title	Item Reference
Definition	A reference to a target Item or Web resource.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Link1Type</a> (page 248)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.94 Item Set

Table 104. Item Set

(XML) Data Model	Element
Namespace (prefix)	nar
Name	itemSet
Title	Item Set
Definition	A set of Items.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <a href="#">newsItem</a> (page 163) (1..unbounded)
	▪ <a href="#">conceptItem</a> (page 75) (1..unbounded)
	▪ <a href="#">packageItem</a> (page 172) (1..unbounded)
	▪ <a href="#">knowledgeItem</a> (page 150) (0..unbounded)
XML Schema Note(s)	To allow the validation of the structure beyond the root elements of the different items the extension point "any" for the nar XML namespace is the only child element. This allows schema based validation of the content of the items as the validation of the extension point is set to "lax".
Example(s)	



### 11.6.95 Item Title

Table 105. Item Title

(XML) Data Model	Element
Namespace (prefix)	nar
Name	title
Title	Item Title
Definition	A short, natural-language name for the Item.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Label1Type</b> (page 247)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



## 11.6.96 Keyword

Table 106. Keyword

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	keyword		
Title	Keyword		
Definition	Free-text term to be used for indexing or finding the content by text-based search engines.		
User Note(s)	This property may be used in parallel with other properties to describe content like subject or genre which use QCodes or literals to identify an assigned concept. Providers should define if and how the values of keyword properties contained in their items complement, or overlap with, the values of other properties such as subject or genre.		
Implementation Note(s)	Be aware of the lexical space restrictions for an XML Schema normalizedString - see XML Schema specifications.		
XML Schema Spec	At: PCL		
Datatype	Extends <a href="#">Int1StringType</a> (page 245)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (0..1); <a href="#">QCodeListType</a> (page 250); A refinement of the semantics of the keyword.</li> </ul>		
	▪ <a href="#">quantifyAttributes</a> (page 263)	<b>Name</b>	<b>Datatype</b>
		confidence (0..1)	Int100Type
		relevance (0..1)	Int100Type
	▪ <a href="#">rankingAttributes</a> (page 262)	<b>Name</b>	<b>Datatype</b>
rank (0..1)		XML Schema nonNegativeIntege	
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.97 Knowledge Item

Table 107. Knowledge Item

(XML) Data Model	Element
Namespace (prefix)	nar
Name	knowledgItem
Title	Knowledge Item
Definition	An Item used for collating a set of concept definitions to form the physical representation of a controlled vocabulary.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>contentMeta</b> (page 81) (0..1)
	▪ <b>assert</b> (page 60) (0..unbounded)
	▪ <b>inlineRef</b> (page 138) (0..unbounded)
	▪ <b>conceptSet</b> (page 77) (0..1)
XML Schema Note(s)	
Example(s)	



## 11.6.98 Language

Table 108. Language

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	language		
Title	Language		
Definition	A language associated with the content. For news this is a language used by the news content, for events this is a language used at this event, for Knowledge Items this is the major language used to describe the concepts		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values	<p>tag values must be valid BCP 47 language tags. Recommended IPTC NewsCodes for the <i>role</i> attribute: <a href="http://cv.iptc.org/newscodes/language/role/">http://cv.iptc.org/newscodes/language/role/</a></p>		
Attribute(s)	<ul style="list-style-type: none"> <li>▪ tag (1); XML Schema language; Indicator of the language.</li> <li>▪ role (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the property.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>rankingAttributes</b> (page 262)	modified (0..1)	DateOptTimeType
<b>Name</b>		<b>Datatype</b>	
rank (0..1)	XML Schema nonNegativeInteger		
Child Element(s)	▪ <b>name</b> (page 184) (0..unbounded)		
XML Schema Note(s)			
Example(s)			



### 11.6.99 Line Break

Table 109. Line Break

(XML) Data Model	Element
Namespace (prefix)	nar
Name	br
Title	Line Break
Definition	A line break.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	Empty element
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.100 Link

Table 110. Link

(XML) Data Model	Element
Namespace (prefix)	nar
Name	link
Title	Link
Definition	A link from the current Item to a target Item or Web resource.
User Note(s)	<p>They are different variants of links: Links may allow for navigation from a newsItem to another related Item or a Web resource, and its title be displayed as supplemental information to the final user. Example: a newsItem representing a section of a transcript (a “take” in the news language) may be linked to the previous and next take; an article about a person may be linked to the biography of this person.</p> <p>Links may express a parent-child relationship. Example: a newsItem representing an article may be linked to the article it is a translation of; a wrap-up may be linked to the previous stories used as source material for the article; a cropped picture may be linked to its source picture.</p> <p>Links may express dependency on external Items which are required in order to fully present the composite content of the Item. If some target Items are not retrievable, then the recipient processor should fail gracefully. The most obvious example is a newsItem representing an illustrated article. The textual content of the newsItem (usually formatted as NITF or XHTML) includes a reference to a photo which is represented by another newsItem. As the NAR recipient processor is content agnostic, it cannot infer this dependency from processing the content. A dependency link from the article to the picture indicates that the recipient processor must retrieve the target newsItem before the article can be fully displayed.</p> <p>Pointing at the latest version of an Item while exposing content metadata may lead to unwanted display or selection criteria if these metadata were subsequently modified; therefore only the stable content properties should be exposed in a link.</p>
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Link1Type</a> (page 248)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.101 Locality

Table 111. Locality

(XML) Data Model	Element
Namespace (prefix)	nar
Name	locality
Title	Locality
Definition	A city/town/village etc. part of the address.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PropType</b> (page 237)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.102 Located

Table 112. Located

(XML) Data Model	Element
Namespace (prefix)	nar
Name	located
Title	Located
Definition	A location from which the content originates.
User Note(s)	<p>This information applies especially to news, and may also be expressed as free text in the “dateline” of a story, along with a date of content creation and the name of the content provider. The rules for determining the location are provider-dependent. The location is typically determined differently for different types of content:</p> <ul style="list-style-type: none"> <li>- Text: The practices of news providers either identify the location the content relates to or the location the content was created by a reporter or a writer. If a correspondent is resident in town A but writes about an event in town B the name of town A or B can be used. But the provider's policy should be available as written document.</li> <li>- Photo: The location of origin of content is the place shown in the photo image.</li> <li>- Graphics: The location of origin of content should be the editorial office from where this graphics are distributed.</li> <li>- Audio and video: In the case of raw footage the location of origin of the content should be the place of event, if people can be heard/are shown from different places the news provider can decide by its own policy, but this policy should be available as written document.</li> </ul>
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">FlexLocationPropType</a> (page 238)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.103 Location

Table 113. Location

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	location		
Title	Location		
Definition	A location (geographical area or point of interest).		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">FlexLocationPropType</a> (page 238)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <a href="#">timeValidityAttributes</a> (page 261)</li> </ul>	<b>Name</b>	<b>DataType</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.104 Location Details

Table 114. Location Details

(XML) Data Model	Element
Namespace (prefix)	nar
Name	details
Title	Location Details
Definition	Detailed information about the precise location of the point of interest.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>BlockType</b> (page 226)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.105 Member Of

Table 115. Member Of

(XML) Data Model	Element
Namespace (prefix)	nar
Name	memberOf
Title	Member Of
Definition	A set of Items around the same theme of which this Item is a part.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Flex1PropType</a> (page 237)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.106 Message Header

Table 116. Message Header

(XML) Data Model	Element
Namespace (prefix)	nar
Name	header
Title	Message Header
Definition	A set of properties facilitating the exchange of Items.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>sent</b> (page 103) (1); May not be updated in case message retransmission.</li> <li>▪ <b>sender</b> (page 205) (0..1); The structure of this string is not specified by the IPTC. Best practice is to identify a sender by its domain name.</li> <li>▪ <b>transmitId</b> (page 214) (0..1); No two News Messages sent by the same sender on the same date can have the same identifier. In case of retransmission it is not required to update this identifier. This string structure is not specified by the IPTC.</li> <li>▪ <b>priority</b> (page 182) (0..1)</li> <li>▪ <b>origin</b> (page 169) (0..1); This string structure is not specified by the IPTC.</li> <li>▪ <b>destination</b> (page 108) (0..unbounded)</li> <li>▪ <b>channel</b> (page 71) (0..unbounded); A channel identifier is used to provide recipients with information on which select, route, or otherwise handle the content of the message. The channels represent streams in a multiplex: a message may be sent on different channels – e.g. one for text, one for pictures – and each reception point will be able to filter on channel values. This string structure is not specified by the IPTC.</li> <li>▪ <b>timestamp</b> (page 213) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>
XML Schema Note(s)	
Example(s)	



### 11.6.107 Narrower

Table 117. Narrower

(XML) Data Model	Element
Namespace (prefix)	nar
Name	narrower
Title	Narrower
Definition	An identifier of a more specific concept.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>RelatedConceptType</b> (page 255)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.108 News Coverage

Table 118. News Coverage

(XML) Data Model	Element																							
Namespace (prefix)	nar																							
Name	newsCoverage																							
Title	News Coverage																							
Definition	Structured and textual information about the intended coverage by the news provider of this event information. This information is aimed at the editorial staff of the receiver.																							
User Note(s)																								
Implementation Note(s)																								
XML Schema Spec	At: PCL																							
Datatype																								
Internally Ctrl Values																								
Externally Ctrl Values																								
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>role</b> (0..1); <b>QCodeType</b> (page 252); Refines the semantics of the property.</li> </ul>																							
	▪ <b>editAttributes</b> (page 261)	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType														
		Name	Datatype																					
		id (0..1)	XML Schema ID																					
creator (0..1)	QCodeType																							
modified (0..1)	DateOptTimeType																							
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>g2ContentType</b> (page 124) (0..1)</li> <li>▪ <b>itemClass</b> (page 125) (0..1)</li> <li>▪ <b>assignedTo</b> (page 61) (0..1)</li> <li>▪ <b>scheduled</b> (page 203) (0..1)</li> <li>▪ <b>service</b> (page 111) (0..unbounded)</li> <li>▪ <b>edNote</b> (page 110) (0..unbounded)</li> </ul>																							
	▪ <b>Descriptive Metadata Group</b> (page 221) (0..1)	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>by</b> (0..unbounded)</td> <td>66</td> </tr> <tr> <td><b>creditline</b> (0..unbounded)</td> <td>93</td> </tr> <tr> <td><b>dateline</b> (0..unbounded)</td> <td>104</td> </tr> <tr> <td><b>description</b> (0..unbounded)</td> <td>107</td> </tr> <tr> <td><b>genre</b> (0..unbounded)</td> <td>127</td> </tr> <tr> <td><b>headline</b> (0..unbounded)</td> <td>133</td> </tr> <tr> <td><b>keyword</b> (0..unbounded)</td> <td>149</td> </tr> <tr> <td><b>language</b> (0..unbounded)</td> <td>151</td> </tr> <tr> <td><b>slugline</b> (0..unbounded)</td> <td>207</td> </tr> <tr> <td><b>subject</b> (0..unbounded)</td> <td>210</td> </tr> </tbody> </table>	Element Name	Page	<b>by</b> (0..unbounded)	66	<b>creditline</b> (0..unbounded)	93	<b>dateline</b> (0..unbounded)	104	<b>description</b> (0..unbounded)	107	<b>genre</b> (0..unbounded)	127	<b>headline</b> (0..unbounded)	133	<b>keyword</b> (0..unbounded)	149	<b>language</b> (0..unbounded)	151	<b>slugline</b> (0..unbounded)	207	<b>subject</b> (0..unbounded)	210
		Element Name	Page																					
		<b>by</b> (0..unbounded)	66																					
		<b>creditline</b> (0..unbounded)	93																					
		<b>dateline</b> (0..unbounded)	104																					
		<b>description</b> (0..unbounded)	107																					
		<b>genre</b> (0..unbounded)	127																					
		<b>headline</b> (0..unbounded)	133																					
		<b>keyword</b> (0..unbounded)	149																					
		<b>language</b> (0..unbounded)	151																					
	<b>slugline</b> (0..unbounded)	207																						
	<b>subject</b> (0..unbounded)	210																						
XML Schema Note(s)																								
Example(s)																								



### 11.6.109 News Coverage Status

Table 119. News Coverage Status

(XML) Data Model	Element
Namespace (prefix)	nar
Name	newsCoverageStatus
Title	News Coverage Status
Definition	Indicates the certainty of the news coverage of the event
User Note(s)	Indicating a decision of coverage: If a specific coverage was agreed by the news provider the newsCoverageStatus has to be set to code "int" (coverage intended) and at least one newsCoverage element with coverage details <b>MUST</b> be added to the eventDetails.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	Highly recommended IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/newscoveragestatus/">http://cv.iptc.org/newscodes/newscoveragestatus/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.110 News Item (NewsML-G2 Specific)

Table 120. News Item (NewsML-G2 Specific)

(XML) Data Model	Element
Namespace (prefix)	nar
Name	newsItem
Title	News Item (NewsML-G2 Specific)
Definition	An Item containing news-related information.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>AnyItemType</b> (page 223)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>contentMeta</b> (page 82) (0..1)
	▪ <b>partMeta</b> (page 175) (0..1)
	▪ <b>assert</b> (page 60) (0..unbounded)
	▪ <b>inlineRef</b> (page 138) (0..unbounded)
	▪ <b>contentSet</b> (page 86) (0..1)
XML Schema Note(s)	
Example(s)	



### 11.6.111 News Message

Table 121. News Message

(XML) Data Model	Element
Namespace (prefix)	nar
Name	newsMessage
Title	News Message
Definition	A container to exchange one or more items.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <a href="#">header</a> (page 159) (1)</li> <li>▪ <a href="#">itemSet</a> (page 147) (1)</li> </ul>
XML Schema Note(s)	
Example(s)	



**11.6.112 Note**

Table 122. Note

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	note		
Title	Note		
Definition	Additional natural-language information about the concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>BlockType</b> (page 226)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>timeValidityAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.113 Object Details

Table 123. Object Details

(XML) Data Model	Element
Namespace (prefix)	nar
Name	objectDetails
Title	Object Details
Definition	A set of properties representing an object.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>created</b> (page 106) (0..1)</li> <li>▪ <b>creator</b> (page 92) (0..unbounded)</li> <li>▪ <b>copyrightNotice</b> (page 89) (0..unbounded)</li> </ul>
XML Schema Note(s)	
Example(s)	



### 11.6.114 Occurrence Status

Table 124. Occurrence Status

(XML) Data Model	Element
Namespace (prefix)	nar
Name	occurStatus
Title	Occurrence Status
Definition	Indicates the certainty of the occurrence of the event.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QCodePropType</b> (page 251)
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/eventoccurstatus/">http://cv.iptc.org/newscodes/eventoccurstatus/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.115 Opening Hours

Table 125. Opening Hours

(XML) Data Model	Element
Namespace (prefix)	nar
Name	openHours
Title	Opening Hours
Definition	Opening-hours of the place, in natural language.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Label1Type</a> (page 247)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





**11.6.116 Origin**

*Table 126. Origin*

(XML) Data Model	Element
Namespace (prefix)	nar
Name	origin
Title	Origin
Definition	The point of origin of the transmission of the message.
User Note(s)	This string's structure is not specified by the IPTC.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.117 Organisation Details

Table 127. Organisation Details

(XML) Data Model	Element
Namespace (prefix)	nar
Name	organisationDetails
Title	Organisation Details
Definition	A group of properties specific to an organisation.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>founded</b> (page 102) (0..1)
	▪ <b>dissolved</b> (page 101) (0..1)
	▪ <b>location</b> (page 156) (0..unbounded)
	▪ <b>contactInfo</b> (page 79) (0..unbounded)
	▪ Extension Point (0..unbounded). Any set of provider-defined properties.
XML Schema Note(s)	
Example(s)	



### 11.6.118 Organiser

Table 128. Organiser

(XML) Data Model	Element
Namespace (prefix)	nar
Name	organiser
Title	Organiser
Definition	A person or organisation organising the event.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PartyPropType</b> (page 236)
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes for the <i>role</i> attribute: <a href="http://cv.iptc.org/newscodes/eventorganiserrole/">http://cv.iptc.org/newscodes/eventorganiserrole/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.119 Package Item

Table 129. Package Item

(XML) Data Model	Element
Namespace (prefix)	nar
Name	packageItem
Title	Package Item
Definition	An Item used for packaging references to other Items and Web resources.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>AnylItemType</b> (page 223)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>contentMeta</b> (page 83) (0..1)
	▪ <b>assert</b> (page 60) (0..unbounded)
	▪ <b>inlineRef</b> (page 138) (0..unbounded)
	▪ <b>groupSet</b> (page 132) (0..1)
XML Schema Note(s)	
Example(s)	



### 11.6.120 Participant

Table 130. Participant

(XML) Data Model	Element
Namespace (prefix)	nar
Name	participant
Title	Participant
Definition	A person or organisation (e.g. a group of artists) participating in the event.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>Flex1PartyPropType</b> (page 236)
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes for <i>role</i> attribute: <a href="http://cv.iptc.org/newscodes/eventparticipantrole/">http://cv.iptc.org/newscodes/eventparticipantrole/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.121 Participation Requirement

Table 131. Participation Requirement

(XML) Data Model	Element
Namespace (prefix)	nar
Name	participationRequirement
Title	Participation Requirement
Definition	A requirement for participating in the event.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Flex1PropType</a> (page 237)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <a href="#">QCodeType</a> (page 252); Refines the semantics of the property.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.122 Part Metadata

Table 132. Part Metadata

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	partMeta		
Title	Part Metadata		
Definition	A set of properties associated with a specific part of the content of the Item.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ partid (0..1); XML Schema ID; The identifier of the part.		
	▪ seq (0..1); XML Schema nonNegativeInteger; The sequence number of the part.		
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
	dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .	



Table 132. Part Metadata (Continued)

	<ul style="list-style-type: none"> <li>▪ <b>role</b> (page 196) (0..1)</li> <li>▪ <b>icon</b> (page 134) (0..unbounded); If multiple icon elements are present within a single contentMeta or partMeta property they MUST represent the same visual content, only differentiated by rendition, contentType or format.</li> <li>▪ <b>timeDelim</b> (page 211) (0..1)</li> <li>▪ <b>regionDelim</b> (page 218) (0..1)</li> </ul>																						
Child Element(s)	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>urgency</b> (0..1)</td> <td>216</td> </tr> <tr> <td><b>contentCreated</b> (0..1)</td> <td>94</td> </tr> <tr> <td><b>contentModified</b> (0..1)</td> <td>95</td> </tr> <tr> <td><b>located</b> (0..unbounded)</td> <td>155</td> </tr> <tr> <td><b>infoSource</b> (0..unbounded)</td> <td>143</td> </tr> <tr> <td><b>creator</b> (0..unbounded)</td> <td>92</td> </tr> <tr> <td><b>contributor</b> (0..unbounded)</td> <td>87</td> </tr> <tr> <td><b>audience</b> (0..unbounded)</td> <td>62</td> </tr> <tr> <td><b>exclAudience</b> (0..unbounded)</td> <td>118</td> </tr> <tr> <td><b>altId</b> (0..unbounded)</td> <td>56</td> </tr> </tbody> </table>	Element Name	Page	<b>urgency</b> (0..1)	216	<b>contentCreated</b> (0..1)	94	<b>contentModified</b> (0..1)	95	<b>located</b> (0..unbounded)	155	<b>infoSource</b> (0..unbounded)	143	<b>creator</b> (0..unbounded)	92	<b>contributor</b> (0..unbounded)	87	<b>audience</b> (0..unbounded)	62	<b>exclAudience</b> (0..unbounded)	118	<b>altId</b> (0..unbounded)	56
	Element Name	Page																					
	<b>urgency</b> (0..1)	216																					
	<b>contentCreated</b> (0..1)	94																					
	<b>contentModified</b> (0..1)	95																					
	<b>located</b> (0..unbounded)	155																					
	<b>infoSource</b> (0..unbounded)	143																					
	<b>creator</b> (0..unbounded)	92																					
	<b>contributor</b> (0..unbounded)	87																					
	<b>audience</b> (0..unbounded)	62																					
	<b>exclAudience</b> (0..unbounded)	118																					
	<b>altId</b> (0..unbounded)	56																					
	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>by</b> (0..unbounded)</td> <td>66</td> </tr> <tr> <td><b>creditline</b> (0..unbounded)</td> <td>93</td> </tr> <tr> <td><b>dateline</b> (0..unbounded)</td> <td>104</td> </tr> <tr> <td><b>description</b> (0..unbounded)</td> <td>107</td> </tr> <tr> <td><b>genre</b> (0..unbounded)</td> <td>127</td> </tr> <tr> <td><b>headline</b> (0..unbounded)</td> <td>133</td> </tr> <tr> <td><b>keyword</b> (0..unbounded)</td> <td>149</td> </tr> <tr> <td><b>language</b> (0..unbounded)</td> <td>151</td> </tr> <tr> <td><b>slugline</b> (0..unbounded)</td> <td>207</td> </tr> <tr> <td><b>subject</b> (0..unbounded)</td> <td>210</td> </tr> </tbody> </table>	Element Name	Page	<b>by</b> (0..unbounded)	66	<b>creditline</b> (0..unbounded)	93	<b>dateline</b> (0..unbounded)	104	<b>description</b> (0..unbounded)	107	<b>genre</b> (0..unbounded)	127	<b>headline</b> (0..unbounded)	133	<b>keyword</b> (0..unbounded)	149	<b>language</b> (0..unbounded)	151	<b>slugline</b> (0..unbounded)	207	<b>subject</b> (0..unbounded)	210
	Element Name	Page																					
	<b>by</b> (0..unbounded)	66																					
	<b>creditline</b> (0..unbounded)	93																					
	<b>dateline</b> (0..unbounded)	104																					
	<b>description</b> (0..unbounded)	107																					
	<b>genre</b> (0..unbounded)	127																					
	<b>headline</b> (0..unbounded)	133																					
<b>keyword</b> (0..unbounded)	149																						
<b>language</b> (0..unbounded)	151																						
<b>slugline</b> (0..unbounded)	207																						
<b>subject</b> (0..unbounded)	210																						
	▪ <b>Administrative Metadata Group</b> (page 221)																						
	▪ <b>Descriptive Metadata Group</b> (page 221) (0..1)																						
	▪ Extension Point (0..unbounded). Any set of provider-defined properties.																						
XML Schema Note(s)																							
Example(s)	<pre>&lt;!-- Example: Defining a 1.5 second part running from 2.0S to 3.5S, using 'normalPlayTime', qualified as a 'sting' --&gt; &lt;partMeta&gt;   &lt;role qcode="partRole:sting"/&gt;   &lt;timeDelim start="00:00:02.000" end="00:00:03.500" time-unit="timeunit:normalPlayTime"/&gt; &lt;/partMeta&gt;</pre>																						





### 11.6.123 Person Details

Table 133. Person Details

(XML) Data Model	Element
Namespace (prefix)	nar
Name	personDetails
Title	Person Details
Definition	A group of properties specific to a person.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	▪ <b>born</b> (page 99) (0..1)
	▪ <b>died</b> (page 100) (0..1)
	▪ <b>affiliation</b> (page 55) (0..unbounded)
	▪ <b>contactInfo</b> (page 79) (0..unbounded)
	▪ Extension Point (0..unbounded). Any set of provider-defined properties.
XML Schema Note(s)	
Example(s)	



### 11.6.124 Phone Number

Table 134. Phone Number

(XML) Data Model	Element
Namespace (prefix)	nar
Name	phone
Title	Phone Number
Definition	An international phone number.
User Note(s)	The <i>tech</i> attribute indicates a land-line, cellular etc., service.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>ElectronicAddressTechType</b> (page 234)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.125 POI Details

Table 135. POI Details

(XML) Data Model	Element
Namespace (prefix)	nar
Name	POIDetails
Title	POI Details
Definition	A group of properties specific to a point of interest.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <a href="#">position</a> (page 128) (0..1)</li> <li>▪ <a href="#">openHours</a> (page 168) (0..1)</li> <li>▪ <a href="#">capacity</a> (page 67) (0..1)</li> <li>▪ <a href="#">access</a> (page 51) (0..unbounded)</li> <li>▪ <a href="#">details</a> (page 157) (0..unbounded)</li> <li>▪ <a href="#">contactInfo</a> (page 79) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>
XML Schema Note(s)	
Example(s)	



### 11.6.126 Postal Address

Table 136. Postal Address

(XML) Data Model	Element
Namespace (prefix)	nar
Name	address
Title	Postal Address
Definition	A postal address.
User Note(s)	A special value of the role attribute may indicate that this information is not used to make contacts but e.g. is the registered address of a company.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the postal address.</li> </ul>
Child Element(s)	▪ <b>line</b> (page 54) (0..unbounded)
	▪ <b>locality</b> (page 154) (0..1)
	▪ <b>area</b> (page 91) (0..1)
	▪ <b>country</b> (page 90) (0..1)
	▪ <b>postalCode</b> (page 181) (0..1)
XML Schema Note(s)	
Example(s)	



### 11.6.127 Postal Code

Table 137. Postal Code

(XML) Data Model	Element
Namespace (prefix)	nar
Name	postalCode
Title	Postal Code
Definition	A postal code, part of the address.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">IntlStringType</a> (page 245)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.128 Priority

Table 138. Priority

(XML) Data Model	Element
Namespace (prefix)	nar
Name	priority
Title	Priority
Definition	The priority of this message in the overall transmission process. A value of 1 corresponds to the highest priority, a value of 9 to the lowest.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">Int1To9Type</a> (page 244)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.129 Profile

Table 139. Profile

(XML) Data Model	Element
Namespace (prefix)	nar
Name	profile
Title	Profile
Definition	The name of the structural template (aka profile) used for the generation of the Item.
User Note(s)	This property gives information about the precise structure of an Item, e.g. a simple package, article with one picture, and may be the name of the transformation stylesheet used for the generation of the Item.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>VersionedStringType</b> (page 260)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.130 Property Value Name

Table 140. Property Value Name

(XML) Data Model	Element
Namespace (prefix)	nar
Name	name
Title	Property Value Name
Definition	A natural-language name of the concept assigned as property value.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">IntlStringType</a> (page 245)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.6.131 Publish Status

Table 141. Publish Status

(XML) Data Model	Element
Namespace (prefix)	nar
Name	pubStatus
Title	Publish Status
Definition	The publishing status of the Item. If no value is provided the default value is “usable”.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	Mandatory IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/pubstatusg2/">http://cv.iptc.org/newscodes/pubstatusg2/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.132 Recurrence Date

Table 142. Recurrence Date

(XML) Data Model	Element
Namespace (prefix)	nar
Name	rDate
Title	Recurrence Date
Definition	An explicit date (and optionally time with the time zone) of recurrence.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">DateOptTimePropType</a> (page 229)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.133 Recurrence Rule

Table 143. Recurrence Rule

(XML) Data Model	Element
Namespace (prefix)	nar
Name	rRule
Title	Recurrence Rule
Definition	A rule of recurrence.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">RecurrenceRuleType</a> (page 254)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.134 Registration

Table 144. Registration

(XML) Data Model	Element
Namespace (prefix)	nar
Name	registration
Title	Registration
Definition	How and when to register for the event. Could also include information about cost, and so on. May also hold accreditation information.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>BlockType</b> (page 226)
Internally Ctrl Values	
Externally Ctrl Values	Recommended IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/eventregrole/">http://cv.iptc.org/newscodes/eventregrole/</a>
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.135 Related Concept

Table 145. Related Concept

(XML) Data Model	Element
Namespace (prefix)	nar
Name	related
Title	Related Concept
Definition	An identifier of a related concept, where the relationship is different from elements <i>sameAs</i> , <i>broader</i> , or <i>narrower</i> .
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	Extends <a href="#">RelatedConceptType</a> (page 255)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	<a href="#">bag</a> (page 63) (0..1)
XML Schema Note(s)	
Example(s)	



### 11.6.136 Remote Catalog Reference

Table 146. Remote Catalog Reference

(XML) Data Model	Element									
Namespace (prefix)	nar									
Name	catalogRef									
Title	Remote Catalog Reference									
Definition	A reference to a remote catalog.									
User Note(s)										
Implementation Note(s)										
XML Schema Spec	At: PCL									
Datatype										
Internally Ctrl Values										
Externally Ctrl Values										
Attribute(s)	<ul style="list-style-type: none"> <li>▪ href (1); <b>IRIType</b> (page 246); A hyperlink to a remote catalog.</li> </ul>									
	<ul style="list-style-type: none"> <li>▪ <b>editAttributes</b> (page 261)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType
		Name	Datatype							
		id (0..1)	XML Schema ID							
creator (0..1)	QCodeType									
modified (0..1)	DateOptTimeType									
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>title</b> (page 148) (0..unbounded)</li> </ul>									
XML Schema Note(s)										
Example(s)										



### 11.6.137 Remote Content (NewsML-G2 Specific)

Table 147. Remote Content (NewsML-G2 Specific)

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	remoteContent		
Title	Remote Content		
Definition	A rendition of the content using a reference/link to a resource representing the content data at a remote location.		
User Note(s)	<p>To identify the remote resource either the residref attribute or the href attribute MUST be set, optionally both MAY be used in parallel. The residref attribute identifies a managed remote resource by its globally unique identifier (if the resource has such an identifier), while the href attribute identifies the location of the remote resource in e.g. a (remote) file system. If the remote resource is managed - like an item - and consequently the residref attribute is used, a version attribute MAY indicate the resource's version; in the absence of version information, the remote resource is the latest version available.</p> <p>The Width Unit and Height Unit may take the following values, taken from an IPTC defined controlled vocabulary: lines, pixels, points (more units are defined by this CV, check the most recent version).</p>		
Implementation Note(s)	If the Width Unit and/or Height Unit IS NOT present, the default value(s) in <b>Table 225</b> on page 266 MUST be assumed		
		Video Codec	QCodeType
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values	Mandatory IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/dimensionunit/">http://cv.iptc.org/newscodes/dimensionunit/</a>		



Table 147. Remote Content (NewsML-G2 Specific) (Continued)

Attribute(s)	▪ <b>newsContentAttributes</b> (page 263)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		rendition (0..1)	QCodeType
		generator (0..1)	XML Schema string
		generated (0..1)	DateOptTimeType
	▪ <b>targetResourceAttributes</b> (page 264)	<b>Name</b>	<b>Datatype</b>
		href (0..1)	IRIType
		residref (0..1)	XML Schema string
		version (0..1)	XML Schema positiveInteger
		contenttype (0..1)	XML Schema string
		format (0..1)	QCodeType
	▪ <b>timeValidityAttributes</b> (page 261)	<b>Name</b>	<b>Data Type</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
	▪ <b>newsContentCharacteristics</b> (page 264)	<b>Name</b>	<b>Datatype</b>
		Word Count	XML Schema nonNegativeInteger
		Image Width	XML Schema nonNegativeInteger
		Image Width Unit	QCodeType
		Image Height	XML Schema nonNegativeInteger
		Image Height Unit	QCodeType
		Image Orientation	XML Schema nonNegativeInteger
		Image Colour Space	QCodeType
		Resolution	XML Schema positiveInteger
		Duration	XML Schema nonNegativeInteger
		Unit of Duration	QCodeType
		Audio Codec	QCodeType
		Audio Bit Rate	XML Schema positiveInteger
		Audio Variable Bit Rate flag	XML Schema boolean
		Audio Sample Size	XML Schema positiveInteger
		Audio Sample Rate	XML Schema positiveInteger
		Audio Channels	QCodeType
		Video Codec	QCodeType
		Video Average Bit Rate	XML Schema positiveInteger
		Video Variable Bit Rate flag	XML Schema boolean
		Video Frame Rate	XML Schema positiveInteger
		Video Scan Technique	enumeration progressive/interlaced
	Video Aspect Ratio	XML Schema normalizedString	
	Video Sampling Method	XML Schema normalizedString	
	▪ language (0..1); XML Schema language; The language used by the remote content.		





Table 147. Remote Content (NewsML-G2 Specific) (Continued)

Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>altLoc</b> (page 57) (0..unbounded)</li> <li>▪ <b>altId</b> (page 56) (0..unbounded)</li> <li>▪ <b>channel</b> (page 71) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>
XML Schema Note(s)	
Example(s)	<pre> &lt;!-- RC: Picture, using implicit default dimensionunit:pixels --&gt; &lt;remoteContent residref="tag:reuters.com,0000:binary_BTRE4A31LE800-THUMBNAI" rendition="rend:thumbnail" contenttype="image/jpeg" format="fmt:jpegBaseline" width="100" height="100" /&gt; &lt;!-- RC: Graphic, using explicit dimensionunits --&gt; &lt;remoteContent residref="tag:reuters.com,0000:binary_BTRE37913MM00-THUMBNAI" rendition="rend:thumbnail" contenttype="image/gif" format="fmt:gif87a" width="100" widthunit="dimensionunit:points" height="100" heightunit="dimensionunit:points"/&gt; </pre>



### 11.6.138 Remote Information about a Concept

Table 148. Remote Information about a Concept

(XML) Data Model	Element
Namespace (prefix)	nar
Name	remotelInfo
Title	Remote Information about a Concept
Definition	Link to an item or a web resource which provides information about the concept.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">Link1Type</a> (page 248)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.139 Rights Information

Table 149. Rights Information

(XML) Data Model	Element											
Namespace (prefix)	nar											
Name	rightsInfo											
Title	Rights Information											
Definition	A set of properties representing the rights associated with the Item.											
User Note(s)												
Implementation Note(s)												
XML Schema Spec	At: PCL											
Datatype												
Internally Ctrl Values												
Externally Ctrl Values												
Attribute(s)	<p>idrefs; (0..1); XML Schema IDREFS; The reference to the part(s) of the content the rights are about.</p> <table border="1"> <thead> <tr> <th></th> <th>Name</th> <th>Data Type</th> </tr> </thead> <tbody> <tr> <td>▪ <b>timeValidityAttributes</b> (page 261)</td> <td>validfrom (0..1)</td> <td>DateOptTimeType</td> </tr> <tr> <td></td> <td>validto (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>				Name	Data Type	▪ <b>timeValidityAttributes</b> (page 261)	validfrom (0..1)	DateOptTimeType		validto (0..1)	DateOptTimeType
	Name	Data Type										
▪ <b>timeValidityAttributes</b> (page 261)	validfrom (0..1)	DateOptTimeType										
	validto (0..1)	DateOptTimeType										
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>accountable</b> (page 53) (0..1)</li> <li>▪ <b>copyrightHolder</b> (page 88) (0..1)</li> <li>▪ <b>copyrightNotice</b> (page 89) (0..unbounded)</li> <li>▪ <b>usageTerms</b> (page 217) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>											
XML Schema Note(s)												
Example(s)												



### 11.6.140 Role in the Content Stream

Table 150. Role in Content Stream

(XML) Data Model	Element
Namespace (prefix)	nar
Name	role
Title	Role in Content Stream
Definition	The role in the overall content stream.
User Note(s)	This property may indicate the role of the content part in a piece of streaming media. Examples (video): "sting", "slate", etc.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.141 Role in the Workflow

Table 151. Role in the Workflow

(XML) Data Model	Element
Namespace (prefix)	nar
Name	role
Title	Role in the Workflow
Definition	The role of the Item in the editorial workflow.
User Note(s)	Among other possibilities this property may indicate the importance of the item in a fee by concepts like “flash”, “bulletin”, “alert”, “urgent”, “newsbreak”, and so on.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	

## 11.6.142 Ruby

Table 152. Ruby

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	ruby		
Title	Ruby		
Definition	Ruby annotation for documents using an East Asian script.		
User Note(s)			
Implementation Note(s)	This implementation aligns with the Simple Ruby markup without and with parentheses of the W3C (see <a href="http://www.w3.org/TR/ruby/#simple-ruby1">http://www.w3.org/TR/ruby/#simple-ruby1</a> ).		
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .
Child Element(s)	▪ <b>rb</b> (page 199) (1)		
	▪ <b>rp</b> (page 200) (see XML Schema note below)		
	▪ <b>rt</b> (page 201) (see XML Schema note below)		
XML Schema Note(s)	The alternative simple Ruby markup without and with parentheses is expressed by the use of either a single <i>rt</i> element or a single <i>rp-rt-rp</i> sequence of elements. Ruby parentheses (<rp>, empty elements) must be used as a pair: either both are present or none is present.		
Example(s)	<pre>&lt;ruby&gt;   &lt;rb&gt;IPTC&lt;/rb&gt;   &lt;rp&gt;(&lt;rp/&gt;&lt;rt&gt;International Press Telecommunications   Council&lt;/rt&gt;&lt;rp&gt;)&lt;rp/&gt; &lt;/ruby&gt;</pre>		



### 11.6.143 Ruby Base

Table 153. Ruby Base

(XML) Data Model	Element
Namespace (prefix)	nar
Name	rb
Title	Ruby Base
Definition	Ruby base text.
User Note(s)	Also see <a href="#">ruby</a> (page 198).
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.144 Ruby Parenthesis

Table 154. Ruby Parenthesis

(XML) Data Model	Element
Namespace (prefix)	nar
Name	rp
Title	Ruby Parenthesis
Definition	Visual parentheses for Ruby Text
User Note(s)	Also see <a href="#">ruby</a> (page 198).
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	Ruby parentheses elements must be used as a pair: either both are present or none is present.
Example(s)	<pre>&lt;ruby&gt;   &lt;rb&gt;IPTC&lt;/rb&gt;   &lt;rp&gt;( &lt;rp/&gt;&lt;rt&gt;International Press Telecommunications     Council&lt;/rt&gt;&lt;rp&gt; )&lt;rp/&gt; &lt;/ruby&gt;</pre>





### 11.6.145 Ruby Text

Table 155. Ruby Text

(XML) Data Model	Element
Namespace (prefix)	nar
Name	rt
Title	Ruby Text
Definition	Ruby text.
User Note(s)	Also see <a href="#">ruby</a> (page 198).
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.146 Same As

Table 156. Same As

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	sameAs		
Title	Same As		
Definition	An identifier of an equivalent concept.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">FlexPropType</a> (page 242)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <a href="#">timeValidityAttributes</a> (page 261)</li> </ul>	<b>Name</b>	<b>Data Type</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.147 Scheduled

Table 157. Scheduled

(XML) Data Model	Element
Namespace (prefix)	nar
Name	scheduled
Title	Scheduled
Definition	The intended time of delivery for the planned G2 item.
User Note(s)	MUST correspond to the itemClass property of the planned item.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">ApproximateDateTimePropType</a> (page 224)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.148 Scheme Declaration

Table 158. Scheme Declaration

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	scheme		
Title	Scheme Declaration		
Definition	A scheme alias-to-URI mapping.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>alias (1); XML Schema NCName; A short string assigned by the provider as a representation of the scheme URI.</li> <li>uri (1); <b>IRIType</b> (page 246); The URI which identifies the scheme.</li> </ul>		
	<ul style="list-style-type: none"> <li><b>editAttributes</b> (page 261)</li> </ul>	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	modified (0..1)	DateOptTimeType	
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.149 Sender

Table 159. Sender

(XML) Data Model	Element
Namespace (prefix)	nar
Name	sender
Title	Sender
Definition	The sender of the items, which may be an organisation or a person.
User Note(s)	The structure of this string is not specified by the IPTC. Best practice is to identify a sender by its domain name.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.150 Signal

Table 160. Signal

(XML) Data Model	Element
Namespace (prefix)	nar
Name	signal
Title	Signal
Definition	An instruction to the processor of this item that the content requires special handling.
User Note(s)	This property might indicate major rewriting of the content, important correction, urgent handling etc. The processor might be required to perform specific actions, depending on the contract between the provider and the recipient. Users should be alerted of the reception of an Item containing a signal by some UI mechanism (sound or display). An editorial note (edNote) may be used to convey additional natural language information related to the processing of the content.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.151 Slugline

Table 161. Slugline

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	slugline		
Title	Slugline		
Definition	A sequence of tokens associated with the content. The interpretation is provider specific.		
User Note(s)	<i>separator</i> providers may choose to use more complex separation rules. In such a case the meaning of the separators must be conveyed by some other means.		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<b>IntlStringType</b> (page 245)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>separator (0..1); XML Schema string; The character string acting as a separator between the tokens in the slugline.</li> <li>role (0..1); <b>QCodeType</b> (page 252); The role this slugline plays in the scope of the full content.</li> </ul>		
	<ul style="list-style-type: none"> <li><b>rankingAttributes</b> (page 262)</li> </ul>	<b>Name</b>	<b>Datatype</b>
		rank (0..1)	XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.152 Span

Table 162. Span

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	span		
Title	Span		
Definition	A generic mechanism for adding inline information to parts of the textual content.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ class (0..1); NMTOKENS; List of classes.		
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
	▪ <b>editAttributes</b> (page 261)	dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
		<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
creator (0..1)		QCodeType	
modified (0..1)	DateOptTimeType		
Child Element(s)			
XML Schema Note(s)			
Example(s)			





### 11.6.153 Start Date/Time

Table 163. Start Date/Time

(XML) Data Model	Element
Namespace (prefix)	nar
Name	start
Title	Start Date/Time
Definition	The date (and optionally the time with time zone) the event commences. This may be an exact or an approximative value.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">ApproximateDateTimePropType</a> (page 224)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.154 Subject

Table 164. Subject

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	subject		
Title	Subject		
Definition	An important topic of the content; what the content is about. For a Knowledge Item the content is the set of concepts, for an event the content is the event as such.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">Flex1ConceptPropType</a> (page 235)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">rankingAttributes</a> (page 262)	<b>Name</b>	<b>Datatype</b>
		rank (0..1)	XML Schema nonNegativeInteger
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.155 Time Delimiter

Table 165. Time Delimiter

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	timeDelim		
Title	Time Delimiter		
Definition	A delimiter for a piece of streaming media content expressed in various time formats..		
User Note(s)	<p>The time unit may take the following values, taken from an IPTC defined controlled vocabulary:</p> <ul style="list-style-type: none"> <li>- <i>timecode</i>: An SMPTE timecode containing a string encoded identification. Timestamp format: hh:mm:ss:ff (ff for frames).</li> <li>- <i>timeCodeDropFrame</i>: An SMPTE timecode containing a string encoded identification. Timestamp format: hh:mm:ss:ff (ff for frames). The drop frame flag should be set.</li> <li>- <i>editUnit</i>: The editUnit is the amount of time per video frame (1s / number of frames per second) or the amount of time per audio sample (1s / number of samples per second), for which the video frame rate or audio sample rate must be known. Timestamp format: long unsigned integer.</li> <li>- <i>normalPlayTime</i>: Indicates the position relative to the beginning of the presentation. Timestamp format: hh:mm:ss.mmm (mmm for milliseconds). See also: RFC 2326.</li> <li>- <i>seconds</i>: Time given in full seconds. Timestamp format: long unsigned integer.</li> <li>- <i>milliseconds</i>: Time given in full milliseconds. Timestamp format: long unsigned integer.</li> </ul>		
Implementation Note(s)	<p>If a time unit IS NOT present, the value <i>editUnit</i> MUST be assumed.            Any timestamps MUST be formatted appropriately for the time unit (as detailed above).            All timestamps SHOULD be zero-padded from the left as applicable, e.g. a normalPlay-Time value starting at 12 seconds would be represented as '00:00:12.000'.</p>		
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values	Mandatory IPTC NewsCodes: <a href="http://cv.iptc.org/newscodes/timeunit/">http://cv.iptc.org/newscodes/timeunit/</a>		
Attribute(s)	<ul style="list-style-type: none"> <li>▪ start (1); XML Schema string; The timestamp corresponding to the start of the part.</li> <li>▪ end (1); XML Schema string; The timestamp corresponding to the end of the part.</li> <li>▪ timeunit (1); <b>QCodeType</b> (page 252); The unit used for the start and end timestamps.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	modified (0..1)	DateOptTimeType	
Child Element(s)			



*Table 165. Time Delimiter*

XML Schema Note(s)	
Example(s)	<pre> &lt;!-- Example: Defining a 1 second part running from 2S to 3S, using 'seconds' --&gt; &lt;partMeta&gt; &lt;timeDelim start="2" end="3" timeunit="timeunit:seconds"/&gt; &lt;/partMeta&gt; &lt;!-- Example: Defining a 1.5 second part running from 2.0S to 3.5S, using 'normalPlayTime' --&gt; &lt;partMeta&gt; &lt;timeDelim start="00:00:02.000" end="00:00:03.500" time- unit="timeunit:normalPlayTime"/&gt; &lt;/partMeta&gt; </pre>



### 11.6.156 Timestamp

Table 166. Timestamp

(XML) Data Model	Element
Namespace (prefix)	nar
Name	timestamp
Title	Timestamp
Definition	A date-and-time associated with the message, other than the date-and-time the message was sent.
User Note(s)	The exact meaning may be refined by the role qualifier.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<a href="#">DateTimePropType</a> (page 232)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <a href="#">QCodeType</a> (page 252); A refinement of the semantics of the property.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.157 Transmission Identifier

Table 167. Transmission Identifier

(XML) Data Model	Element
Namespace (prefix)	nar
Name	transmitId
Title	Transmission Identifier
Definition	The transmission identifier associated with the message.
User Note(s)	This string's structure is not specified by the IPTC. No two News Messages sent by the same sender on the same date may have the same identifier. In case of retransmission it is not required to update this identifier.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.158 Type of a Concept

Table 168. Type of a Concept

(XML) Data Model	Element
Namespace (prefix)	nar
Name	type
Title	Type of a Concept
Definition	The nature of the concept.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.159 Urgency

Table 169. Urgency

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	urgency		
Title	Urgency		
Definition	The editorial urgency of the content. A value of 1 corresponds to the highest urgency, a value of 9 to the lowest.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	<a href="#">Int1To9Type</a> (page 244)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">editAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			





### 11.6.160 Usage Terms

Table 170. Usage Terms

(XML) Data Model	Element
Namespace (prefix)	nar
Name	usageTerms
Title	Usage Terms
Definition	A natural-language statement about the usage terms pertaining to the content.
User Note(s)	This property includes the type of usage to which the rights apply, the geographical area or areas to which specified usage rights pertain, the indication of the rights holder, restrictions on the use of the content and the time period over which the stated rights apply. If no usage terms are specified, then no specific restrictions on use of the content beyond contractual ones are being asserted.
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">RightsLabelType</a> (page 256)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.6.161 Visual Region Delimiter

Table 171. Visual Region Delimiter

(XML) Data Model	Element		
Namespace (prefix)	nar		
Name	regionDelim		
Title	Visual Region Delimiter		
Definition	A delimiter for a rectangular region in a piece of visual content.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	A: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ x (0..1); XML Schema integer; The x-axis coordinate of the side of the rectangle which has the smaller x-axis coordinate value in the current user coordinate system.</li> <li>▪ y (0..1); XML Schema integer; The y-axis coordinate of the side of the rectangle which has the smaller y-axis coordinate value in the current user coordinate system.</li> <li>▪ width (0..1); XML Schema integer; The width of the rectangle.</li> <li>▪ height (0..1); XML Schema integer; The height of the rectangle.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.6.162 Web Address

Table 172. Web Address

(XML) Data Model	Element
Namespace (prefix)	nar
Name	web
Title	Web Address
Definition	A Web address.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>IRIType</b> (page 246)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the web address.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



## 11.7 Element Group Definitions

### 11.7.1 Concept Definition Group

This group of properties defines a concept using free-text. The name property MUST come first, then the other elements may be inserted in any order.

Table 173. Concept Definition Group Elements

Element Title	Element Name	Card	Described on Page
Concept Name	<b>name</b>	(0..unbounded)	76
Concept Definition	<b>definition</b>	(0..unbounded)	73
Note	<b>note</b>	(0..unbounded)	165
Facet	<b>facet</b>	(0..unbounded)	121
Remote Information	<b>remotelInfo</b>	(0..unbounded)	194

### 11.7.2 Concept Relationships Group

This group of properties defines the relationship between a concept and other concepts. The elements may be inserted in any order.

Table 174. Concept Relationships Group Elements

Element Title	Element Name	Card	Described on Page
Same As	<b>sameAs</b>	(0..unbounded)	202
Broader	<b>broader</b>	(0..unbounded)	65
Narrower	<b>narrower</b>	(0..unbounded)	160
Related	<b>related</b>	(0..unbounded)	189

### 11.7.3 Entity Details Group

This group of aggregate components defines detailed properties for a specific type of concept. Only one element from this group MAY be present in the wrapping context.

Table 175. Entity Details Group Elements

Element Title	Element Name	Card	Described on Page
Person Details	<b>personDetails</b>	(1)	177
Organisation Details	<b>organisationDetails</b>	(1)	170
Geopolitical Area Details	<b>geoAreaDetails</b>	(1)	129
POI Details	<b>POIDetails</b>	(1)	179
Object Details	<b>objectDetails</b>	(1)	166



### 11.7.4 Administrative Metadata Group

This group of properties is related to the administrative facet of content. The order of the elements in this group is flexible: The non-repeatable elements **MUST** come first, then the repeatable elements may be inserted in any order.

Table 176. Administrative Metadata Group Elements

Element Title	Element Name	Card	Described on Page
Urgency	<b>urgency</b>	(0..1)	216
Date Content Created	<b>contentCreated</b>	(0..1)	94
Date Content Modified	<b>contentModified</b>	(0..1)	95
Located	<b>located</b>	(0..unbounded)	143
Information Source	<b>infoSource</b>	(0..unbounded)	216
Creator	<b>creator</b>	(0..unbounded)	92
Contributor	<b>contributor</b>	(0..unbounded)	87
Audience	<b>audience</b>	(0..unbounded)	62
Excluded Audience	<b>exclAudience</b>	(0..unbounded)	118
Alternative Identifier	<b>altId</b>	(0..unbounded)	56

### 11.7.5 Knowledge Descriptive Metadata Group

This group of properties is related to the descriptive facet of knowledge content. The order of the elements in this group is flexible: all elements are repeatable and may be inserted in any order.

Table 177. Knowledge Descriptive Metadata Group Elements

Element Title	Element Name	Card	Described on Page
Language	<b>language</b>	(0..unbounded)	151
Keyword	<b>keyword</b>	(0..unbounded)	149
Subject	<b>subject</b>	(0..unbounded)	210
Description	<b>description</b>	(0..unbounded)	107

### 11.7.6 Descriptive Metadata Group

This group of properties is related to the descriptive facet of news content. The order of the elements in this group is flexible: all elements are repeatable and may be inserted in any order.

Table 178. Descriptive Metadata Group Elements

Element Title	Element Name	Card	Described on Page
Language	<b>language</b>	(0..unbounded)	151
Genre	<b>genre</b>	(0..unbounded)	127
Keyword	<b>keyword</b>	(0..unbounded)	149
Subject	<b>subject</b>	(0..unbounded)	210
Slugline	<b>slugline</b>	(0..unbounded)	207
Headline	<b>headline</b>	(0..unbounded)	133
Dateline	<b>dateline</b>	(0..unbounded)	104
By	<b>by</b>	(0..unbounded)	66
CreditLine	<b>creditline</b>	(0..unbounded)	93
Description	<b>description</b>	(0..unbounded)	107



### 11.7.7 Item Management Group

This group of properties is related to the management of Items. They MUST appear in the order of the table below.

Table 179. Item Management Group Elements

Element Title	Element Name	Card	Described on Page
Item Class	<b>itemClass</b>	(1)	144
Content Provider	<b>provider</b>	(1)	85
Date Item Version Created	<b>versionCreated</b>	(1)	98
Date Item First Created	<b>firstCreated</b>	(0..1)	97
Date Item Embargo Ends	<b>embargoed</b>	(0..1)	96
Publish Status	<b>pubStatus</b>	(0..1)	185
Role in the Workflow	<b>role</b>	(0..1)	197
File Name	<b>filename</b>	(0..1)	123
Generator Tool	<b>generator</b>	(0..unbounded)	126
Profile	<b>profile</b>	(0..1)	183
Editorial Service	<b>service</b>	(0..unbounded)	111
Item Title	<b>title</b>	(0..unbounded)	148
Editorial Note	<b>edNote</b>	(0..unbounded)	110
Member Of	<b>memberOf</b>	(0..unbounded)	158
Instance Of	<b>instanceOf</b>	(0..unbounded)	141
Signal	<b>signal</b>	(0..unbounded)	206
Alternative Representation	<b>altRep</b>	(0..unbounded)	58



## 11.8 Datatype Definitions

### 11.8.1 Any Item Type

Table 180. Any Item Type

(XML) Data Model	Type							
Namespace (prefix)	nar							
Name	AnyItemType							
Title	Any Item Type							
Definition	An abstract class. All G2 items are inherited from this class.							
User Note(s)								
Implementation Note(s)								
XML Schema Spec	At: PCL							
Datatype								
Internally Ctrl Values								
Externally Ctrl Values								
Attribute(s)	<ul style="list-style-type: none"> <li>standard; (0..1); string value: default = "XML Schema string"; The IPTC standard to which the Item is conformant.</li> </ul>							
	<ul style="list-style-type: none"> <li>standardversion; (1); XML Schema string; restricted to the format "integer.integer"; The major-minor version of the XML schema specifying the Item.</li> </ul>							
	<ul style="list-style-type: none"> <li>conformance; (1); string value: fixed = "XML Schema string" - default = "core"; The conformance level to which the Item is conformant.</li> </ul>							
	<ul style="list-style-type: none"> <li>guid; (1); XML Schema string; The persistent, universally unique identifier for the Item.</li> </ul>							
	<ul style="list-style-type: none"> <li>version; (0..1); XML Schema positiveInteger; The version of the Item.</li> </ul>							
	<table border="1"> <thead> <tr> <th></th> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td rowspan="2">▪ <b>i18nAttributes</b> (page 261)</td> <td>xml:lang (0..1)</td> <td>XML Schema language</td> </tr> <tr> <td>dir (0..1)</td> <td>XML Schema string; enumeration <i>ltr, rtl</i>.</td> </tr> </tbody> </table>		Name	Datatype	▪ <b>i18nAttributes</b> (page 261)	xml:lang (0..1)	XML Schema language	dir (0..1)
	Name	Datatype						
▪ <b>i18nAttributes</b> (page 261)	xml:lang (0..1)	XML Schema language						
	dir (0..1)	XML Schema string; enumeration <i>ltr, rtl</i> .						
Child Element(s)	<ul style="list-style-type: none"> <li>W3C XML Digital Signature (from namespace <a href="http://www.w3.org/2000/09/xmldsig#">http://www.w3.org/2000/09/xmldsig#</a>) (0..1)</li> </ul>							
	<ul style="list-style-type: none"> <li><b>catalogRef</b> (page 190) (0..unbounded)</li> </ul>							
	<ul style="list-style-type: none"> <li><b>catalog</b> (page 68) (0..unbounded)</li> </ul>							
	<ul style="list-style-type: none"> <li><b>rightsInfo</b> (page 195) (0..unbounded)</li> <li><b>itemMeta</b> (page 145) (1)</li> </ul>							
XML Schema Note(s)	At least one of the elements catalogRef or catalog element MUST be present. These elements MAY be inserted in any order.							
Example(s)								



## 11.8.2 Approximate Date and Time Property Type

Table 181. Approximate Date and Time Property Type

(XML) Data Model	Type									
Namespace (prefix)	nar									
Name	ApproximateDateTimePropType									
Title	Approximate Date and Time Property Type									
Definition	A calendar date with an optional time (with time zone) part and an optional approximation range for the date.									
User Note(s)	If a start and/or end attribute exists, then the date is approximate, else it is defined precisely by the property's date. If only the approximation start date is provided the range ends with the property value; if only the approximation end date is provided the approximation range starts with the property value.									
Implementation Note(s)										
XML Schema Spec	At: PCL									
Datatype	Union of a XML Schema dateTime, date, gYearMonth, gYear, gMonth, gMonthDay, and gDay, with the addition of the following qualifiers.									
Internally Ctrl Values										
Externally Ctrl Values										
Attribute(s)	<ul style="list-style-type: none"> <li>▪ approxstart (0..1); <b>TruncatedDateTimeType</b> (page 258); The date (and optionally time) at which the approximation range begins.</li> <li>▪ approxend (0..1); <b>TruncatedDateTimeType</b> (page 258); The date (and optionally time) at which the approximation range ends.</li> </ul>									
	▪ <b>editAttributes</b> (page 261)	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType
		Name	Datatype							
		id (0..1)	XML Schema ID							
creator (0..1)	QCodeType									
modified (0..1)	DateOptTimeType									
Child Element(s)										
XML Schema Note(s)										
Example(s)	<p>Examples of the format {reference date, range start date, range end date}:            {2006-09-20, 2006-09-18, 2006-09-30} = on about 20 September 2006, not before the 18th, not after the 30th.            {1855, 1850, 1860} = in about 1855, not before the 1850, not after the 1860.            {--05-03, 1950, 1953} = on a 3 May, between 1950 and 1953.</p>									





### 11.8.3 Audience Type

Table 182. Audience Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	AudienceType		
Title	Audience Type		
Definition	An audience for the content.		
User Note(s)	<i>significance: 1</i> – corresponds to the highest significance. <i>significance: 9</i> – corresponds to the lowest significance.		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	Extends <b>Flex1PropType</b> (page 237)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <i>significance</i> (0..1); <b>Int1To9Type</b> (page 244). A qualifier which indicates the expected significance of the content for this specific audience.</li> </ul>		
	▪ <b>quantifyAttributes</b> (page 263)	<b>Name</b>	<b>Datatype</b>
		confidence (0..1)	Int100Type
		relevance (0..1)	Int100Type
	why (0..1)	QCodeType	
Child Element(s)			
XML Schema Note(s)			
Example(s)			



## 11.8.4 Block Type

Table 183. Block Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	BlockType		
Title	Block Type		
Definition	Information about the content as natural language string with minimal markup and line breaks.		
User Note(s)	Blocks are primarily used for notes, comments or instructions created by a news provider for use by recipient editorial teams.		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	XML mixed content		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>role</b> (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the block.</li> <li>▪ <b>media</b> (0..1); XML Schema NMTOKENS; An indication of the target media type(s) values as defined by the Cascading Style Sheets (CSS) specification.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr</i> , <i>rtl</i> .
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>a</b> (page 59) (0..unbounded)</li> <li>▪ <b>span</b> (page 208) (0..unbounded)</li> <li>▪ <b>ruby</b> (page 198) (0..unbounded)</li> <li>▪ <b>br</b> (page 152) (0..unbounded)</li> <li>▪ <b>inline</b> (page 135) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>		
	XML Schema Note(s)		
	Example(s)		



### 11.8.5 Concept Identifier Type

Table 184. Concept Identifier Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	ConceptIdType
Title	Concept Identifier Type
Definition	The preferred unambiguous identifier for the concept.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ qcode (1); <b>QCodeType</b> (page 252); A qualified code which identifies a concept.</li> <li>▪ created (0..1); <b>DateOptTimeType</b> (page 230); The date (and optionally the time) when the identifier was created.</li> <li>▪ retired (0..1); <b>DateOptTimeType</b> (page 230); The date (and optionally the time) after which the concept identifier should no longer be applied as the value of a property.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.6 Content Metadata Type

Table 185. Content Metadata Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	ContentMetadataType		
Title	Content Metadata Type		
Definition			
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
Child Element(s)	▪ <b>Administrative Metadata Group</b> (page 221) (0..1)	<b>Element Name</b>	<b>Page</b>
		<b>urgency</b> (0..1)	216
		<b>contentCreated</b> (0..1)	94
		<b>contentModified</b> (0..1)	95
		<b>located</b> (0..unbounded)	155
		<b>infoSource</b> (0..unbounded)	143
		<b>creator</b> (0..unbounded)	92
		<b>contributor</b> (0..unbounded)	87
		<b>audience</b> (0..unbounded)	62
		<b>exclAudience</b> (0..unbounded)	118
	<b>altId</b> (0..unbounded)	56	
	▪ Extension Point (0..unbounded). Any set of provider-defined properties.		
XML Schema Note(s)			
Example(s)			



### 11.8.7 Date and Optional Time Property Type

Table 186. Date and Optional Time Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	DateOptTimePropType		
Title	Date and Optional Time Property Type		
Definition	A date plus optionally a time and a time zone.		
User Note(s)	The time may be expressed in Universal Time Coordinates (UTC), or in local time together with a time zone offset in hours and minutes.		
Implementation Note(s)	DateOptTimePropType is used as a property datatype.		
XML Schema Spec	At: PCL		
Datatype	The union of a XML schema dateTime and date.		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">editAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.8.8 Date and Optional Time Type

Table 187. *Date and Optional Time Type*

(XML) Data Model	Type
Namespace (prefix)	nar
Name	DateOptTimeType
Title	Date and Optional Time Type
Definition	A date plus optionally a time and a time zone.
User Note(s)	The time may be expressed in Universal Time Coordinates (UTC), or in local time together with a time zone offset in hours and minutes.
Implementation Note(s)	DateOptTimeType is used as a datatype for attributes only.
XML Schema Spec	At: Both CCL and PCL
Datatype	The union of a XML schema dateTime (year, month, day, hour, minute, second, optional decimal fraction of a second) and date (year, month and day plus an optional time zone indicator).
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.9 Date and Time or Null Value Property Type

Table 188. Date and Time or Null Value Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	DateTimeOrNullPropType		
Title	Date and Time or Null Value Property Type		
Definition	The type of a property with date and time - or Nothing		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	A union of the XML Schema dateTime type and an XML Schema string restricted to an empty value (UnionDateEmptyStringType).		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">editAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.8.10 Date and Time Property Type

Table 189. Date and Time Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	DateTimePropType		
Title	Date and Time Property Type		
Definition	A date plus a mandatory time and an optional time zone.		
User Note(s)			
Implementation Note(s)	DateTimePropType is used as a property datatype.		
XML Schema Spec	At: PCL		
Datatype	XML Schema dateTime		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">editAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			





### 11.8.11 Electronic Address Type

Table 190. Electronic Address Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	ElectronicAddressType
Title	Electronic Address Type
Definition	
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the electronic address.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.12 Electronic Address Tech Type

Table 191. Electronic Address Tech Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	ElectronicAddressTechType
Title	Electronic Address Tech Type
Definition	
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	XML Schema string
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ role (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the electronic address.</li> <li>▪ tech (0..1); <b>QCodeType</b> (page 252); The technical variant of the electronic address.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.13 Flexible 1 Concept Property Type

Table 192. Flexible 1 Concept Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	Flex1ConceptPropType		
Title	Flexible 1 Concept Property Type		
Definition			
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	Extends <a href="#">Flex1PropType</a> (page 237)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">quantifyAttributes</a> (page 263)	<b>Name</b>	<b>Datatype</b>
		confidence (0..1)	Int100Type
		relevance (0..1)	Int100Type
		why (0..1)	QCodeType
Child Element(s)	▪ <a href="#">bag</a> (page 63) (0..1)		
XML Schema Note(s)			
Example(s)			



### 11.8.14 Flexible 1 Party Property Type

Table 193. Flexible 1 Party Property Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	Flex1PartyPropType
Title	Flexible 1 Party Property Type
Definition	
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	Extends <a href="#">FlexPartyPropType</a> (page 240)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ role (0..1); <a href="#">QCodeListType</a> (page 250); A refinement of the semantics of the property.
Child Element(s)	
XML Schema Note(s)	
Example(s)	

### 11.8.15 Flexible 1 Property Type

Table 194. Flexible 1 Property Type

(XML) Data Model	Type													
Namespace (prefix)	nar													
Name	Flex1PropType													
Title	Flexible 1 Property Type													
Definition	Flexible generic data type for both controlled and uncontrolled values.													
User Note(s)														
Implementation Note(s)														
XML Schema Spec	At: PCL													
Datatype														
Internally Ctrl Values														
Externally Ctrl Values														
Attribute(s)	<ul style="list-style-type: none"> <li>qcode (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as a property value. (For an inlineRef element this is the identifier of the described concept.)</li> <li>Or</li> <li>literal (0..1); XML Schema normalizedString; A free-text value assigned as a property value. (For an inlineRef element this is the identifier of the described concept.)</li> <li>type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as controlled or uncontrolled property value.</li> </ul>													
	▪ <b>editAttributes</b> (page 261)	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType				
		Name	Datatype											
		id (0..1)	XML Schema ID											
	creator (0..1)	QCodeType												
	modified (0..1)	DateOptTimeType												
▪ <b>i18nAttributes</b> (page 261)	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>xml:lang (0..1)</td> <td>XML Schema language</td> </tr> <tr> <td>dir (0..1)</td> <td>XML Schema string: enumeration <i>ltr, rtl</i>.</td> </tr> </tbody> </table>	Name	Datatype	xml:lang (0..1)	XML Schema language	dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .							
	Name	Datatype												
xml:lang (0..1)	XML Schema language													
dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .													
Child Element(s)	▪ <b>Concept Definition Group</b> (page 220) (0..1)	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>name</b> (0..unbounded)</td> <td>76</td> </tr> <tr> <td><b>definition</b> (0..unbounded)</td> <td>73</td> </tr> <tr> <td><b>facet</b> (0..unbounded)</td> <td>121</td> </tr> <tr> <td><b>remoteInfo</b> (0..unbounded)</td> <td>194</td> </tr> <tr> <td><b>note</b> (0..unbounded)</td> <td>165</td> </tr> </tbody> </table>	Element Name	Page	<b>name</b> (0..unbounded)	76	<b>definition</b> (0..unbounded)	73	<b>facet</b> (0..unbounded)	121	<b>remoteInfo</b> (0..unbounded)	194	<b>note</b> (0..unbounded)	165
		Element Name	Page											
		<b>name</b> (0..unbounded)	76											
		<b>definition</b> (0..unbounded)	73											
		<b>facet</b> (0..unbounded)	121											
	<b>remoteInfo</b> (0..unbounded)	194												
	<b>note</b> (0..unbounded)	165												
	▪ <b>Concept Relationships Group</b> (page 220) (0..1)	<table border="1"> <thead> <tr> <th>Element Name</th> <th>Page</th> </tr> </thead> <tbody> <tr> <td><b>broader</b> (0..unbounded)</td> <td>65</td> </tr> <tr> <td><b>narrower</b> (0..unbounded)</td> <td>160</td> </tr> <tr> <td><b>related</b> (0..unbounded)</td> <td>189</td> </tr> <tr> <td><b>sameAs</b> (0..unbounded)</td> <td>202</td> </tr> </tbody> </table>	Element Name	Page	<b>broader</b> (0..unbounded)	65	<b>narrower</b> (0..unbounded)	160	<b>related</b> (0..unbounded)	189	<b>sameAs</b> (0..unbounded)	202		
		Element Name	Page											
		<b>broader</b> (0..unbounded)	65											
<b>narrower</b> (0..unbounded)		160												
<b>related</b> (0..unbounded)	189													
<b>sameAs</b> (0..unbounded)	202													
▪ Extension Point (0..unbounded). Any set of provider-defined properties.														
XML Schema Note(s)														
Example(s)														



### 11.8.16 Flexible Location Property Type

Table 195. Flexible Location Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	FlexLocationPropType		
Title	Flexible Location Property Type		
Definition	Flexible location (i.e. geo area or POI) data type for both controlled and uncontrolled values.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ qcode (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as property value. or</li> <li>▪ literal (0..1); XML Schema normalizedString; A free-text value assigned as property value.</li> </ul>		
	<ul style="list-style-type: none"> <li>▪ type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as controlled or uncontrolled property value.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
	▪ <b>i18nAttributes</b> (page 261)	Name	Datatype
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
	Child Element(s)	▪ <b>Concept Definition Group</b> (page 220) (0..1)	<b>Element Name</b>
<b>name</b> (0..unbounded)			76
<b>definition</b> (0..unbounded)			73
<b>facet</b> (0..unbounded)			121
<b>remoteInfo</b> (0..unbounded)			194
<b>note</b> (0..unbounded)			165
▪ <b>Concept Relationships Group</b> (page 220) (0..1)		<b>Element Name</b>	<b>Page</b>
		<b>broader</b> (0..unbounded)	65
		<b>narrower</b> (0..unbounded)	160
		<b>related</b> (0..unbounded)	189
		<b>sameAs</b> (0..unbounded)	202
<ul style="list-style-type: none"> <li>▪ <b>geoAreaDetails</b> (page 129) (0..1) Or</li> <li>▪ <b>POIDetails</b> (page 179) (0..1)</li> </ul>			
▪ Extension Point (0..unbounded). Any set of provider-defined properties.			
XML Schema Note(s)			
Example(s)			



### 11.8.17 Flexible Organisation Property Type

Table 196. Flexible Organisation Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	FlexOrganisationPropType		
Title	Flexible Organisation Property Type		
Definition	Flexible organisation data type for both controlled and uncontrolled values.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ qcode (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as property value. Or</li> <li>▪ literal (0..1); XML Schema normalizedString; A free-text value assigned as property value.</li> </ul>		
	<ul style="list-style-type: none"> <li>▪ type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as controlled or uncontrolled property value.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	Name	Datatype
xml:lang (0..1)		XML Schema language	
dir (0..1)		XML Schema string: enumeration <i>ltr, rtl</i> .	
Child Element(s)	▪ <b>organisationDetails</b> (page 170) (0..1)		
	▪ <b>Concept Definition Group</b> (page 220) (0..1)	<b>Element Name</b>	<b>Page</b>
		<b>name</b> (0..unbounded)	76
		<b>definition</b> (0..unbounded)	73
		<b>facet</b> (0..unbounded)	121
		<b>remoteInfo</b> (0..unbounded)	194
	▪ <b>Concept Relationships Group</b> (page 220) (0..1)	<b>note</b> (0..unbounded)	165
		<b>Element Name</b>	<b>Page</b>
		<b>broader</b> (0..unbounded)	65
		<b>narrower</b> (0..unbounded)	160
	<b>related</b> (0..unbounded)	189	
	<b>sameAs</b> (0..unbounded)	202	
▪ Extension Point (0..unbounded). Any set of provider-defined properties.			
XML Schema Note(s)			
Example(s)			

### 11.8.18 Flexible Party Property Type

Table 197. Flexible Party Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	FlexPartyPropType		
Title	Flexible Party Property Type		
Definition	Flexible party (i.e. person or organisation) data type for both controlled and uncontrolled values.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>qcode (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as property value. Or</li> <li>literal (0..1); XML Schema normalizedString; A free-text value assigned as property value.</li> </ul>		
	<ul style="list-style-type: none"> <li>type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as controlled or uncontrolled property value.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	Name	Datatype
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
	Child Element(s)	<ul style="list-style-type: none"> <li><b>personDetails</b> (page 177) (0..1) or</li> <li><b>organisationDetails</b> (page 170) (0..1)</li> </ul>	
		▪ <b>Concept Definition Group</b> (page 220) (0..1)	<b>Element Name</b>
<b>name</b> (0..unbounded)			76
<b>definition</b> (0..unbounded)			73
<b>facet</b> (0..unbounded)			121
<b>remoteInfo</b> (0..unbounded)			194
▪ <b>Concept Relationships Group</b> (page 220) (0..1)		<b>note</b> (0..unbounded)	165
		<b>Element Name</b>	<b>Page</b>
		<b>broader</b> (0..unbounded)	65
		<b>narrower</b> (0..unbounded)	160
		<b>related</b> (0..unbounded)	189
▪ <b>sameAs</b> (0..unbounded)		202	
▪ Extension Point (0..unbounded). Any set of provider-defined properties.			
XML Schema Note(s)			
Example(s)			





### 11.8.19 Flex Person Property Type

Table 198. Flex Person Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	FlexPersonPropType		
Title	Flex Person Property Type		
Definition	Flexible person data type for both controlled and uncontrolled values.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ qcode (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as property value. Or</li> <li>▪ literal (0..1); XML Schema normalizedString; A free-text value assigned as property value.</li> </ul>		
	<ul style="list-style-type: none"> <li>▪ type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as controlled or uncontrolled property value.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
xml:lang (0..1)		XML Schema language	
dir (0..1)		XML Schema string: enumeration <i>ltr, rtl</i> .	
Child Element(s)	▪ <b>personDetails</b> (page 177) (0..1)		
	▪ <b>Concept Definition Group</b> (page 220) (0..1)	<b>Element Name</b>	<b>Page</b>
		<b>name</b> (0..unbounded)	76
		<b>definition</b> (0..unbounded)	73
		<b>facet</b> (0..unbounded)	121
		<b>remotelInfo</b> (0..unbounded)	194
	▪ <b>Concept Relationships Group</b> (page 220) (0..1)	<b>Element Name</b>	<b>Page</b>
		<b>broader</b> (0..unbounded)	65
		<b>narrower</b> (0..unbounded)	160
		<b>related</b> (0..unbounded)	189
▪ <b>sameAs</b> (0..unbounded)		202	
▪ Extension Point (0..unbounded). Any set of provider-defined properties.			
XML Schema Note(s)			
Example(s)			



### 11.8.20 Flexible Property Type

Table 199. Flexible Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	FlexPropType		
Title	Flexible Property Type		
Definition	Flexible generic data type for both controlled and uncontrolled values.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>qcode (0..1); <b>QCodeType</b> (page 252); A qualified code assigned as a property value. Or</li> <li>literal (0..1); XML Schema normalizedString; A free-text value assigned as a property value.</li> <li>type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as a controlled or uncontrolled property value.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
Child Element(s)	▪ <b>name</b> (page 184) (0..unbounded)		
XML Schema Note(s)			
Example(s)			



**11.8.21 Integer 0 to 100 Type**

*Table 200. Integer 0 to 100 Type*

(XML) Data Model	Type
Namespace (prefix)	nar
Name	Int100Type
Title	Integer 0 to 100 Type
Definition	An integer with a value range from 0 to 100.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema integer, value restriction 0 to 100.
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



**11.8.22 Integer 1 to 9 Type**

*Table 201. Integer 1 to 9 Type*

(XML) Data Model	Type
Namespace (prefix)	nar
Name	Int1To9Type
Title	Integer 1 to 9 Type
Definition	An integer with a value range from 1 to 9.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema integer, value restriction 1 to 9.
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.23 International String Type

Table 202. International String Type

(XML) Data Model	Type			
Namespace (prefix)	nar			
Name	IntlStringType			
Title	International String Type			
Definition	An internationalized string, where the language and directionality in which the information is written are indicated.			
User Note(s)				
Implementation Note(s)				
XML Schema Spec	At: PCL			
Datatype				
Internally Ctrl Values				
Externally Ctrl Values				
Attribute(s)	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>	
		xml:lang (0..1)	XML Schema language	
	▪ <b>editAttributes</b> (page 261)	dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .	
		<b>Name</b>	<b>Datatype</b>	
		id (0..1)	XML Schema ID	
		creator (0..1)	QCodeType	
modified (0..1)	DateOptTimeType			
Child Element(s)				
XML Schema Note(s)				
Example(s)				



### 11.8.24 IRI Type

Table 203. IRI Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	IRIType
Title	IRI Type
Definition	An Internationalized Resource Identifier reference, as defined by RFC3987.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	XML Schema anyURI
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	

## 11.8.25 Label 1 Type

Table 204. Label 1 Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	Label1Type		
Title	Label 1 Type		
Definition	Information about the content as natural language string with minimal markup.		
User Note(s)	Labels are assertions expressed as natural language strings intended to be consumed by human beings. They are typically displayed alongside the content of an Item or in place of Items in a list, providing a means of selection among them.		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	XML mixed content		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>▪ <b>role</b> (0..1); <b>QCodeListType</b> (page 250); A refinement of the semantics of the label.</li> <li>▪ <b>media</b> (0..1); XML Schema NMTOKENS; An indication of the target media type(s), values as defined by the Cascading Style Sheets (CSS) specification.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
Child Element(s)	<ul style="list-style-type: none"> <li>▪ <b>a</b> (page 59) (0..unbounded)</li> <li>▪ <b>span</b> (page 208) (0..unbounded)</li> <li>▪ <b>ruby</b> (page 198) (0..unbounded)</li> <li>▪ <b>inline</b> (page 135) (0..unbounded)</li> <li>▪ Extension Point (0..unbounded). Any set of provider-defined properties.</li> </ul>		
	XML Schema Note(s)		
	Anchor, Span and Ruby are modelled after their XHTML 1.1 counterparts.		
	Example(s)		



## 11.8.26 Link 1 Type

Table 205. Link 1 Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	Link1 Type		
Title	Link 1 Type		
Definition	A datatype for linking this item to other items or resources.		
User Note(s)	To identify the target resource either the residref attribute or the href attribute <b>MUST</b> be set, optionally both <b>MAY</b> be used in parallel. The residref attribute identifies the target resource by its globally unique identifier (if the resource has such an identifier), while the href attribute identifies the location of the target resource in e.g. a (remote) file system. If the target resource is an Item and the residref attribute is used, a version attribute <b>MAY</b> indicate the target Item version; in the absence of version information, the target resource is the latest version available.		
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype			
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>rank (0..1); XML Schema nonNegativeInteger; The rank of the link among other links.</li> <li>rel (0..1); <b>QCodeType</b> (page 252); The identifier of the relationship between the current Item and the target resource.</li> </ul>		
	▪ <b>editAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
	▪ <b>timeValidityAttributes</b> (page 261)	<b>Name</b>	<b>Data Type</b>
		validfrom (0..1)	DateOptTimeType
		validto (0..1)	DateOptTimeType
	▪ <b>targetResourceAttributes</b> (page 264)	<b>Name</b>	<b>Datatype</b>
		href (0..1)	IRIType
residref (0..1)		XML Schema string	
version (0..1)		XML Schema positiveInteger	
contenttype (0..1)		XML Schema string	
format (0..1)		QCodeType	
size (0..1)		XML Schema non NegativeInteger	
<ul style="list-style-type: none"> <li>guidref (0..1); XML Schema string; The use of this attribute is DEPRECATED, use <i>residref</i> instead.</li> <li>hreftype (0..1); XML Schema normalizedString; The use of this attribute is DEPRECATED, use <i>contenttype</i> instead.</li> </ul>			





Table 205. Link 1 Type (Continued)

Child Element(s)	<ul style="list-style-type: none"> <li>▪ Hint and Extension Point (0..unbounded). Properties from the NAR namespace or from another XML namespace may be added. The purpose of including properties from the NAR namespace is to add a set of hints, i.e. existing properties extracted from the G2 item target resource. These properties must be added as follows:               <ul style="list-style-type: none"> <li>- Any target item property under &lt;itemMeta&gt; or &lt;contentMeta&gt; may be added directly to the extension point</li> <li>- All other target item properties require all ancestor properties except the item's root element.</li> </ul> </li> </ul>
XML Schema Note(s)	Extension Point: a particular hint is a title, already defined at the CCL as a short natural language name representing the link and displayed to the users.
Example(s)	



**11.8.27 QCode List Type**

*Table 206. QCode List Type*

(XML) Data Model	Type
Namespace (prefix)	nar
Name	QCodeListType
Title	QCode List Type
Definition	A space-separated list of QCodeType values.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	List of QCodeType values.
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.28 QCode Property Type

Table 207. QCode Property Type

(XML) Data Model	Type									
Namespace (prefix)	nar									
Name	QCodePropType									
Title	QCode Property Type									
Definition	An element with a QCode value in a qcode attribute.									
User Note(s)										
Implementation Note(s)										
XML Schema Spec	At: PCL									
Datatype										
Internally Ctrl Values										
Externally Ctrl Values										
Attribute(s)	<ul style="list-style-type: none"> <li>qcode (1); <b>QCodeType</b> (page 252); A qualified code assigned as a property value.</li> </ul>									
	<ul style="list-style-type: none"> <li><b>editAttributes</b> (page 261)</li> </ul>	<table border="1"> <thead> <tr> <th>Name</th> <th>Datatype</th> </tr> </thead> <tbody> <tr> <td>id (0..1)</td> <td>XML Schema ID</td> </tr> <tr> <td>creator (0..1)</td> <td>QCodeType</td> </tr> <tr> <td>modified (0..1)</td> <td>DateOptTimeType</td> </tr> </tbody> </table>	Name	Datatype	id (0..1)	XML Schema ID	creator (0..1)	QCodeType	modified (0..1)	DateOptTimeType
		Name	Datatype							
		id (0..1)	XML Schema ID							
creator (0..1)	QCodeType									
modified (0..1)	DateOptTimeType									
Child Element(s)										
XML Schema Note(s)										
Example(s)										



**11.8.29 QCode Type**

Table 208. QCode Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	QCodeType
Title	QCode Type
Definition	A QCode value.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	A set of characters (no whitespace, no colon) followed by a colon (:) character, followed by a set of characters with no whitespace. The corresponding regular expression is: <code>[^\s:]+:[^\s]+</code>
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



**11.8.30 Qualified Property Type**

Table 209. *Qualified Property Type*

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	QualPropType		
Title	Qualified Property Type		
Definition	An element with a QCode value and optional names.		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	Extends <b>QCodePropType</b> (page 251)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <b>i18nAttributes</b> (page 261)	<b>Name</b>	<b>Datatype</b>
		xml:lang (0..1)	XML Schema language
		dir (0..1)	XML Schema string: enumeration <i>ltr, rtl</i> .
Child Element(s)	▪ <b>name</b> (page 76) (0..unbounded)		
XML Schema Note(s)			
Example(s)			



### 11.8.31 Recurrence Rule Type

Table 210. Recurrence Rule Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	RecurrenceRuleType
Title	Recurrence Rule Type
Definition	A rule of recurrence applied to a date associated with an event.
User Note(s)	The different datatypes listed in the Attribute(s) row below correspond to iCalendar datatypes and enumerations.
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	<ul style="list-style-type: none"> <li>▪ freq (1); XML Schema string; The type of recurrence rule.</li> <li>▪ interval (0..1); XML Schema positiveInteger; How often the recurrence rule repeats.</li> <li>▪ until (0..1); <b>DateOptTimeType</b> (page 230); A date-time value which bounds the recurrence rule in an inclusive manner.</li> <li>▪ count (0..1); XML Schema positiveInteger; The number of occurrences at which to range-bound the recurrence.</li> <li>▪ bysecond (0..1); tokens of XML Schema nonNegativeInteger 0..59 ; The BYSECOND rule part specifies a space separated list of seconds within a minute.</li> <li>▪ byminute (0..1); tokens of XML Schema nonNegativeInteger 0..59; The BYMINUTE rule part specifies a space separated list of minutes within an hour.</li> <li>▪ byhour (0..1); tokens of XML Schema nonNegativeInteger 0..23; The BYHOUR rule part specifies space separated list of hours of the day.</li> <li>▪ byday (0..1); tokens of XML Schema string, regEx pattern = "(\\- \\+)?([0-9]){0,2}(MO TU WE TH FR SA SU)": ; The BYDAY rule part specifies a space separated list of days of the week.</li> <li>▪ bymonthday (0..1); tokens of XML Schema Integer -31..-1 and 1..31; The BYMONTHDAY rule part specifies a space separated list of days of the month.</li> <li>▪ bymonth (0..1); tokens of XML Schema nonNegativeInteger 1..12; The BYMONTH rule part specifies a space separated list of months of the year.</li> <li>▪ byyearday (0..1); tokens of XML Schema Integer -366..-1 and 1..366; The BYYEAR-DAY rule part specifies a space separated list of days of the year.</li> <li>▪ byweekno (0..1); tokens of XML Schema Integer -53..-1 and 1..53; The BYWEEKNO rule part specifies a space separated list of ordinals specifying weeks of the year.</li> <li>▪ bysetpos (0..1); tokens of XML Schema Integer -366..-1 and 1..366; The BYSET-POS rule part specifies a space separated list of values which corresponds to the nth occurrence within the set of events specified by the rule.</li> <li>▪ wkst (0..1); XML schema string, enumeration; The day on which the workweek starts.</li> </ul>
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.32 Related Concept Type

Table 211. Related Concept Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	RelatedConceptType		
Title	Related Concept Type		
Definition	An identifier of a related concept, where the relationship is different from elements <i>sameAs</i> , <i>broader</i> , or <i>narrower</i> .		
User Note(s)			
Implementation Note(s)			
XML Schema Spec	At: PCL		
Datatype	Extends <b>FlexPropType</b> (page 242)		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	<ul style="list-style-type: none"> <li>rel (0..1); <b>QCodeType</b> (page 252); The identifier of the relationship between the current concept and the target concept.</li> </ul>		
	<ul style="list-style-type: none"> <li>rank (0..1); XML Schema positiveInteger; The rank of the current concept among concepts having a relationship to the target concept.</li> </ul>		
	<ul style="list-style-type: none"> <li><b>timeValidityAttributes</b> (page 261)</li> </ul>	<b>Name</b>	<b>Data Type</b>
		validfrom (0..1)	DateOptTimeType
	validto (0..1)	DateOptTimeType	
Child Element(s)	<ul style="list-style-type: none"> <li><b>facet</b> (page 121) (0..unbounded)</li> </ul>		
XML Schema Note(s)			
Example(s)			



### 11.8.33 Rights Label Type

Table 212. Rights Label Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	RightsLabelType
Title	Rights Label Type
Definition	
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<b>BlockType</b> (page 226)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ href (0..1); <b>IRIType</b> (page 246); The locator of a remote expression of rights.
Child Element(s)	
XML Schema Note(s)	
Example(s)	





### 11.8.34 Truncated Date and Time Property Type

Table 213. Truncated Date and Time Property Type

(XML) Data Model	Type		
Namespace (prefix)	nar		
Name	TruncatedDateTimePropType		
Title	Truncated Date and Time Property Type		
Definition	An element with a calendar date as a value. The date has an optional time part: it is optionally possible to omit one to many less significant components, from right to left. "From right to left" means starting from the least significant component (i.e. fraction of a second) and to continue with the full time part, the day part and the month part. The year part must not be omitted.		
User Note(s)			
Implementation Note(s)	TruncatedDateTimePropType is used as a property datatype.		
XML Schema Spec	At: PCL		
Datatype	The union of a XML Schema dateTime, date, gYearMonth and gYear, and additionally supports provider-defined qualifiers.		
Internally Ctrl Values			
Externally Ctrl Values			
Attribute(s)	▪ <a href="#">editAttributes</a> (page 261)	<b>Name</b>	<b>Datatype</b>
		id (0..1)	XML Schema ID
		creator (0..1)	QCodeType
		modified (0..1)	DateOptTimeType
Child Element(s)			
XML Schema Note(s)			
Example(s)			



### 11.8.35 Truncated Date and Time Type

Table 214. *Truncated Date and Time Type*

(XML) Data Model	Type
Namespace (prefix)	nar
Name	TruncatedDateTimeType
Title	Truncated Date and Time Type
Definition	A calendar date with an optional time part: it is optionally possible to omit one to many less significant components, from right to left. "From right to left" means starting from the least significant component (i.e. fraction of a second) and to continue with the full time part, the day part and the month part. The year part must not be omitted.
User Note(s)	
Implementation Note(s)	TruncatedDateTimeType is used as a qualifier datatype.
XML Schema Spec	At: Both CCL and PCL
Datatype	The union of a XML Schema dateTime, date, gYearMonth and gYear.
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.36 Typed Qualified Property Type

Table 215. Typed Qualified Property Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	TypedQualPropType
Title	Typed Qualified Property Type
Definition	An element with a QCode value and an additional type for this value.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: Both CCL and PCL
Datatype	<b>QualPropType</b> (page 253)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ type (0..1); <b>QCodeType</b> (page 252); The type of the concept assigned as property value.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



### 11.8.37 Versioned String Type

Table 216. Versioned String Type

(XML) Data Model	Type
Namespace (prefix)	nar
Name	VersionedStringType
Title	Versioned String Type
Definition	The type extending IntlStringType by a version information.
User Note(s)	
Implementation Note(s)	
XML Schema Spec	At: PCL
Datatype	<a href="#">IntlStringType</a> (page 245)
Internally Ctrl Values	
Externally Ctrl Values	
Attribute(s)	▪ versioninfo (0..1); XML schema string; The version of a processing resource.
Child Element(s)	
XML Schema Note(s)	
Example(s)	



## 11.9 Attribute Group Definitions

### 11.9.1 Internationalization Attributes Group

Table 217. *i18nAttributes*

Title	Name	Card	Datatype	Definition
Language Indicator	xml:lang	0..1	XML Schema language	The language of textual content.
Direction	dir	0..1	XML Schema string: enumeration <i>ltr, rtl</i> .	The directionality of textual content.

#### Notes:

- ◆ *xml:lang* values MUST follow RFC 4646 and RFC 4647 (as both replace RFC 3066) or its successor. See also IETF BCP47.
- ◆ The *dir* qualifier specifies the directionality of scripted text: left-to-right (“ltr”, the default) or right-to-left (“rtl”). Its definition follows the XHTML 1.0 production. Directionality – left-to-right or right-to-left – is assigned to characters in Unicode, in order to allow the text to be rendered properly. For example, while English characters are presented left-to-right, Hebrew characters are presented right-to-left. Unicode defines a bidirectional algorithm that must be applied whenever a document contains right-to-left characters. While this algorithm usually gives the proper presentation, some situations leave directionally neutral text and require the *dir* attribute to specify the base directionality.

### 11.9.2 Editing Attributes Group

These attributes are used only at PCL.

Table 218. *editAttributes*

Title	Name	Card	Datatype	Definition
Local Identifier	id	0..1	XML Schema ID	The local identifier of the element.
Creator	creator	0..1	QCodeType	If the supporting property has no value, specifies which party (person, organisation or system) will edit the property. If the supporting property has a value, specifies which party (person, organisation or system) has edited the property.
Date Modified	modified	0..1	DateOptTimeType	The date (and, optionally, the time) when the property was last modified. The initial value is the date (and, optionally, the time) of creation of the property.

### 11.9.3 Time Validity Attributes Group

These attributes are used only at PCL.

Table 219. *timeValidityAttributes*

Title	Name	Card	Datatype	Definition
Valid From	validfrom	0..1	DateOptTimeType	The date (and optionally the time) <i>before</i> which a relationship is not valid.
Valid To	validto	0..1	DateOptTimeType	The date (and optionally the time) <i>after</i> which a relationship is not valid.



### 11.9.4 Ranking Attributes Group

These attributes are used only at PCL.

Table 220. *rankingAttributes*

Title	Name	Card	Datatype	Definition
Rank	rank	0..1	XML Schema nonNegativeInteger	Indicates the relative importance of properties in a list. It applies only to set of properties with the same name. See note on rules for ranking below..

**Note:** Currently there is only one attribute in this group by design; this group may be extended in the future.

Processing rules for the *rank* attribute:

Properties with a lower value of the rank attribute have a higher importance than properties with a higher value of this attribute. All properties with the same value of the rank attribute have the same importance. All properties without a rank attribute have the same importance, which is lower than the importance of all properties with this attribute.

If relative importance is being used to determine display order, then:

- Properties with a lower value of the rank attribute should be displayed before properties with a higher value of this attribute.
- Properties with the same value of the rank attribute should be ordered within this rank alphabetically by their names if these are available. If some or all of the names are available in multiple languages, the order of the properties will depend on the language chosen.
- All properties without a rank attribute should be displayed after all properties with this attribute.

Examples (using rank with the language property):

```

<!-- Rank as: all equal (implicit) -->
<language tag="en"/>
<language tag="fr"/>
<language tag="es"/>
<language tag="de"/>
<!-- Rank as: en, then any others -->
<language tag="en" rank="1"/>
<language tag="fr"/>
<language tag="es"/>
<language tag="de"/>
<!-- Rank as: en, then fr, then es, then de -->
<language tag="en" rank="1"/>
<language tag="fr" rank="2"/>
<language tag="es" rank="3"/>
<language tag="de" rank="4"/>
<!-- Rank as: en, then fr, then any others -->
<language tag="en" rank="1"/>
<language tag="fr" rank="2"/>
<language tag="es"/>
<language tag="de"/>
<!-- Rank as: en and fr, then any others -->
<language tag="en" rank="1"/>
<language tag="fr" rank="1"/>
<language tag="es"/>
<language tag="de"/>

```

### 11.9.5 Quantify Attributes Group

These attributes are used only at PCL.

Table 221. *quantifyAttributes*

Title	Name	Card	Datatype	Definition
Confidence	confidence	0..1	Int100Type	The confidence with which the metadata has been assigned.
Relevance	relevance	0..1	Int100Type	The relevance of the metadata to the news content to which it is attached.
Why	why	0..1	QCodeType	Why the metadata has been included.

#### Notes:

- ◆ An indication of confidence is usually obtained by automatic categorization means. 100 is the highest value.
- ◆ A high relevance indicates that this piece of metadata truly expresses what the piece of news is about, while a low relevance indicates a low correlation between the metadata and the essence of the piece of news.
- ◆ *why* indicates whether the metadata is directly extracted from the content by a tool and/or by a person, whether it is an ancestor of some other concept directly associated with the content (e.g. the concepts France and Europe are ancestors of the concept Paris), or whether it is derived by look-up in a thesaurus (e.g. the entity Merck may be associated with the concept Pharmaceutical Industry Sector).

### 11.9.6 News Content Attributes

Table 222. *newsContentAttributes*

Title	Name	Card	Datatype	Definition
Local Identifier	id	0..1	XML Schema ID	The local identifier of the element.
Rendition	rendition	0..1	QCodeType	The specific rendition of content this component represents. A specific value for rendition MUST NOT be used more than once for elements under contentSet of a NewsItem.
Generator tool	generator	0..1	XML Schema string	The name and version of the software tool used to generate the content.
Generated	generated	0..1	DateOptTimeType	The date (and, optionally, the time) when the content was generated.

#### Notes:

- ◆ *rendition* helps the processor choosing between alternative content components. Thus a picture may have pieces of content rendered as “thumbnail” or “preview”, a text Item may contain an “sms”, a “web” and a “print” rendition; values may be extended by individual providers.
- ◆ Note that *contentType* and *itemClass* of **Item Metadata** (page 145) are complementary. *itemClass* indicates the nature of the Item's content, but not the format of the components it contains: an Item can be of class “video” with a gif thumbnail and a mpeg2 main rendition.
- ◆ *format* is used if no precise content type exists (e.g. “application/xml” or “text/plain” are the only mime types available for a given format). In such a case the Content Type information is complement with Format information. For example the NSK variant of the TIFF format can be expressed as: Content Type = “image/tiff” plus Format = “fmt:NSK”.

### 11.9.7 Target Resource Attributes Group

Table 223. *targetResourceAttributes*

Title	Name	Card	Data Type	Definition
Hyperlink	href	0..1	IRIType	The locator of the target resource
Resource Identifier Reference	residref	0..1	XML Schema string	The provider's identifier of the target resource
Item Version	version	0..1	XML Schema positiveInteger	The version of the target resource
Content Type	contenttype	0..1	XML Schema string	The IANA (Internet Assigned Numbers Authority) MIME type of the target resource
Format	format	0..1	QCodeType	A refinement of a generic content type (i.e. IANA MIME type)
Size	size	0..1	XML Schema non NegativeInteger	The size in bytes of the target resource

### 11.9.8 News Content Characteristics

To be implemented as an attribute group.

Table 224. *newsContentCharacteristics*

Title	Name	Card	Datatype	Definition
Word Count	wordcount	0..1	XML Schema nonNegativeInteger	The count of words of textual content. Applies to textual content.
Image Width	width	0..1	XML Schema nonNegativeInteger	The Image Width for visual content.
Image Width Unit	widthunit	0..1	QCodeType	If present it defines the Width Unit for the Image Width.
Image Height	height	0..1	XML Schema nonNegativeInteger	The Image Height for visual content.
Image Height Unit	heightunit	0..1	QCodeType	If present it defines the Height Unit for the Image Height.
Image Orientation	orientation	0..1	XML Schema nonNegativeInteger	The orientation of the visual content of an image in regard to the standard rendition of the digital image data. Values in the range of 1 to 8 are compatible with the TIFF 6.0 and Exif 2.3 specifications. Applies to image content. Details about the values can be found in <a href="#">Table 226</a> .
Image Colour Space	colourspace	0..1	QCodeType	The colour space of an image. Applies to image content.
Resolution	resolution	0..1	XML Schema positiveInteger	The recommended printing resolution for an image in dots per inch. Applies to image content.
Duration	duration	0..1	XML Schema nonNegativeInteger	The clip duration in time units defined by durationUnit. The default time unit is seconds. Applies to audio-visual content.





Table 224. newsContentCharacteristics (Continued)

Title	Name	Card	Datatype	Definition
Unit of Duration	durationunit	0..1	QCodeType	If present it defines the time unit for the duration attribute. Only codes for integer value time units of the recommended CV (available at <a href="http://cv.iptc.org/newscodes/timeunit/">http://cv.iptc.org/newscodes/timeunit/</a> ) must be applied.
Audio Codec	audiocodec	0..1	QCodeType	The applicable codec for audio data. Applies to audio content.
Audio Bit Rate	audiobitrate	0..1	XML Schema positiveInteger	The audio bit rate in bps. Indicates the average variable bit rate if audiovbr is set to true.
Audio Variable Bit Rate flag	audiovbr	0..1	XML Schema boolean	An indication that the audio data is encoded with a variable bit rate. Applies to audio content.
Audio Sample Size	audiosamplesize	0..1	XML Schema positiveInteger	The number of bits per audio sample, e.g. 16. Applies to audio content. Aliases: audio bits per sample, audio resolution, audio encoding depth.
Audio Sample Rate	audiosamplerate	0..1	XML Schema positiveInteger	The number of audio samples per second, expressed as a sampling frequency in Hz, e.g. 44100. Applies to audio content.
Audio Channels	audiochannels	0..1	QCodeType	The audio sound system, e.g. <i>mono</i> , <i>stereo</i> , <i>surround</i> . Codes may represent e.g. <i>mono</i> , <i>stereo</i> , <i>surround</i> . Applies to audio content.
Video Codec	videocodec	0..1	QCodeType	The applicable codec for video data. Applies to video content.
Video Average Bit Rate	videoavgbitrate	0..1	XML Schema positiveInteger	The video bit rate in bps. Indicates the average variable bit rate if videovbr is set to true.
Video Variable Bit Rate flag	videovbr	0..1	XML Schema boolean	An indication that video data is encoded with a variable bit rate. Applies to video content.
Video Frame Rate	videoframerate	0..1	XML Schema positiveInteger	The number of video frames per second, i.e. the rate at which the material should be shown in order to achieve the intended visual effect. This is the rate at which the material should be shown in order to achieve the intended visual effect. Applies to video content.
Video Scan Technique	videoscan	0..1	enumeration progressive/interlaced	The video scan technique, progressive or interlaced. Applies to video content.
Video Aspect Ratio	videoaspectratio	0..1	XML Schema normalizedString	The video aspect ratio, e.g. 4:3 or 16:9. Applies to video content.
Video Sampling Method	videosampling	0..1	XML Schema normalizedString	The video sampling method, e.g. 4:1:1. Applies to video content.

**Table 225** defines the default units to be used for the Image Width and/or Image Height, if the corresponding Image Width Unit and/or Image Height Unit are not specified.

Table 225. Default Image Height/Width Unit Values

Content Type	Height Unit (default)	Width Unit (default)
Picture	Pixels	Pixels
Graphic: Still / Animated	Points	Points
Video (Analog)	Lines	Pixels
Video (Digital)	Pixels	Pixels

**Table 226** enumerates the allowed values for the **orientation** attribute. The values are integers from 1 to 8 and reflect the TIFF 6.0 and Exif 2.3 specification.

Remark on the Definition column: by the Exif specification the "0th row" is the first row which has been scanned for the digital image and the "0th column" the first column. The explanation describes how a picture having the orientation of value 1 has to be flipped and/or rotated to align with one of the values 2 through 8.

The column "Visual example" shows a picture of the character F having an orientation aligning with the value. For the viewer's convenience the visual top, bottom, left and right of an image are marked up with the initial character of the corresponding term.

Table 226. Orientation Values






Value	Definition and Explanation	Visual Example
1	The 0th row is at the visual top of the image, and the 0th column is the visual left-hand side. Explanation: upright, no flip, no rotation.	
2	The 0th row is at the visual top of the image, and the 0th column is the visual right-hand side. Explanation: upright, image flipped about the vertical axis.	
3	The 0th row is at the visual bottom of the image, and the 0th column is the visual right-hand side. Explanation: image rotated 180 degrees.	
4	The 0th row is at the visual bottom of the image, and the 0th column is the visual left-hand side. Explanation: image flipped about the vertical axis and rotated 180 degrees.	
5	The 0th row is the visual left-hand side of the image, and the 0th column is the visual top. Explanation: image flipped about the vertical axis and rotated 90 degrees counterclockwise.	



Table 226. Orientation Values (Continued)

Value	Definition and Explanation	Visual Example
6	<p>The 0th row is the visual right-hand side of the image, and the 0th column is the visual top.</p> <p>Explanation: image rotated 90 degrees counterclockwise.</p>	
7	<p>The 0th row is the visual right-hand side of the image, and the 0th column is the visual bottom.</p> <p>Explanation: image flipped about the vertical axis and rotated 90 degrees clockwise.</p>	
8	<p>The 0th row is the visual left-hand side of the image, and the 0th column is the visual bottom.</p> <p>Explanation: image rotated 90 degrees clockwise.</p>	

## 12 Glossary

Table 227. Glossary

Term	Definition
alias	See <b>scheme alias</b> .
anonymous controlled vocabulary	A <b>controlled vocabulary</b> that is not a <b>scheme</b> .
catalog	A file containing information about <b>scheme(s)</b> .
code	A character sequence which forms a member of a <b>controlled vocabulary</b> .
concept	Anything that one may wish to refer to, e.g. Diplomacy, Paris, the Euro, OECD, the Japanese language, the IMF, Oil, Madonna, Olympic Games. Thus concept here has a broader meaning than is usual. This is because we are dealing with the idea of Paris, rather than with Paris itself, the idea of Oil, rather than Oil itself, and so on. Concepts fall in two broad categories: <b>named entity</b> and generic (or abstract) concepts. A concept may be defined by a <b>ConceptItem</b> .
ConceptItem	A specialised data structure containing data representing a <b>concept</b> . An identifier for the concept is mandatory and it may, optionally, provide information such as name, definition, relationships, etc. A <b>concept</b> defined by a ConceptItem is identified by a <b>{scheme alias, code}</b> pair. The reverse relationship does not necessarily hold. In other words, there is no requirement that each {scheme alias, code} pair has a corresponding ConceptItem. See also: <b>representation of a ConceptItem</b> .
concept type	A concept type allows the logical grouping of all similar <b>concept(s)</b> , regardless of the <b>scheme(s)</b> the concepts belong to. Examples of concept type might be: Person, Organisation, Language, Business Sector, News Subject or Geography. A concept type is itself a concept and, as such, is represented by a code in a scheme.
concept URI	A URI which identifies a <b>concept</b> . A concept URI is obtained by appending the code representing this concept to the <b>scheme URI</b> corresponding to the scheme to which the code belongs. An abbreviated notation of a concept URI is a <b>Qualified code, QCode</b> .
conformance level	A layer of functionality defined by a standard. The <b>News Architecture</b> power conformance level is a superset of the <b>News Architecture</b> core conformance level, both in terms of structure and processing.
controlled vocabulary	A set of <b>code(s)</b> , managed by some authority (e.g. a person or an organisation), employing some mechanism (e.g. an XML Schema, a Web page, an RFC, or <b>KnowledgeItem</b> ) to maintain this set. A controlled vocabulary is either a <b>scheme</b> or is anonymous (i.e. an <b>anonymous controlled vocabulary</b> ). Each code in a controlled vocabulary represents a <b>concept</b> .
constrained metadata container	A <b>metadata container</b> which either accepts only <b>code(s)</b> of a specified <b>concept type</b> or accepts only codes from a specified <b>controlled vocabulary</b> (which may be an <b>anonymous controlled vocabulary</b> or a <b>scheme</b> ).
Definition	A human-readable string, held within a <b>ConceptItem</b> , which defines the <b>concept</b> which the item represents. Definitions will be implemented using <b>free-form text</b> .
formal metadata element	A metadata element designed to hold data that is not <b>free-form text</b> , e.g. <b>code(s)</b> , or <b>formal text</b> . Such data is usually consumed by software. An example of such an element with a code value is subject. An example value of <i>subject</i> is "nc:15062000".
free-form metadata element	A metadata element designed to hold <b>free-form text</b> . Such data is usually consumed by humans. An example of a free-form metadata element is title. An example value of title is "Ian Thorpe makes a splash". The <b>News Architecture</b> provides a couple of datatypes for free-form text, e.g. International String, Label or BlockText.

Table 227. Glossary (Continued)

Term	Definition
free-form text	Arbitrary text, i.e. text which does not consist of <b>code(s)</b> drawn from a <b>controlled vocabulary</b> . A headline or a description is an example of free-form text.
formal text	A set of one or more <b>metadata container(s)</b> for <b>free-form text</b> to express formal information about a specific <b>concept</b> , but without identifying it. Basic properties for formal text are literal, name, definition and note. An example for formal text is the Creator property with a value of name = "Alfred Hitchcock", definition = "Suspense movie director and producer, born 1899, died 1980".
globally unique identifier	An identifier that is unique, unambiguous, and persistent. Being unique and unambiguous means that there is a 1:1 relationship between the identifier and the identified object. Being persistent means that the identifier never changes as time passes, and that it is never reused as an identifier for another object even if the original object disappears. See also <b>persistent identifier</b> , <b>unambiguous identifier</b> , and <b>unique identifier</b> .
Identifier	A string used to identify a specific <b>resource</b> . See <b>persistent identifier</b> , <b>unambiguous identifier</b> , <b>unique identifier</b> , and <b>globally unique identifier</b> (GUID).
KnowledgeItem	A Knowledge Item is a set of <b>concept</b> definitions to form a consistent structure, which is managed, protected and published as a whole. It facilitates the management and exchange of <b>controlled vocabulary(ies)</b> .
Label	A generic term for datatypes designed to hold <b>free-form text</b> .
Metadata	Data which asserts something about some other data.
metadata container	A location (e.g. an element or an attribute) in a data structure, designed to hold <b>Meta-data</b> . In XML it may be implemented as a <b>metadata element</b> .
metadata element	An XML element, which is either a <b>formal metadata element</b> or a <b>free-form metadata element</b> , it implements the notion of a <b>metadata container</b> .
named entity	A named entity may be a person, place, event, organization, product name, object name or any other news-related real life entity.
News Architecture	A framework of specifications common to all IPTC news exchange standards of the G2 Family of Standards.
news provider	A provider of news content, the entity responsible for the management of news items. May be a news agency, a syndication company, a newspaper, a magazine ... or a blogger.
ontology	See <b>taxonomy</b> .
persistent identifier	An identifier which is associated with the same resource for all time. See also <b>unambiguous identifier</b> , <b>unique identifier</b> , and <b>globally unique identifier</b> (GUID).
processor	An application that supports the handling and processing of Items. Also known as a user agent.
property	A synonym term for a <b>metadata container</b> – may be implemented as XML element.
provider	See <b>news provider</b> .
publish	Make available to other parties involved in the news exchange process, according to the business practices of the provider.

Table 227. Glossary (Continued)

Term	Definition
Qualified code, QCode	A <b>concept URI</b> represented by a string of the form sss:ccc, where sss is a <b>scheme alias</b> and ccc is a <b>code</b> . Examples are iso4217:USD, rfc3066:zh-Hant, nc:15062000, nasdaq:msft and cusip:594918104. A QCode is not the same as a QName (qualified name) [W3C: Namespaces in XML ( <a href="http://www.w3.org/TR/REC-xml-names/">http://www.w3.org/TR/REC-xml-names/</a> )], though there are substantial similarities. The two main differences are: (i) the code does not have to be a valid XML name (e.g. can start with a digit), and (ii) the scheme alias does not have to be declared using a namespace declaration.
representation	The physical form of something.
representation of a ConceptItem	A manifestation of a given <b>ConceptItem</b> that is suited for some particular purpose. The various representations of a given ConceptItem may differ, for example, in whether they are verbose or concise, or in which language(s) they use for name and definition.
resource	A resource is a set of data that has identity.
scheme	A <b>controlled vocabulary</b> which is identified by a scheme URI. A scheme is not an anonymous controlled vocabulary.
scheme alias	A character sequence which is used as an abbreviation for a <b>scheme URI</b> . A scheme alias is similar but not identical to an XML Namespace prefix.
scheme URI	The URI which identifies the <b>scheme</b> . It is recommended to make this URI a URL and resolving it should result in retrieving information about the scheme.
synonym	Synonyms are <b>concept URI(s)</b> that refer from one <b>concept</b> to another concept with equivalent semantics. Synonymy is a symmetric relationship, which means that if A is synonymous with B, then B is also synonymous with A. An example of synonyms is “cemetery” and “graveyard”. In the <b>News Architecture</b> synonyms are expressed by the <b>sameAs</b> (page 202) property.
target	The data being described by the metadata. The IPTC has chosen to use the term target rather than subject (the term used by RDF [ <a href="http://www.w3.org/RDF/">http://www.w3.org/RDF/</a> ]), as subject has a special meaning in the context of News.
taxonomy	In a broad sense, taxonomy is the science of classification, but is often taken to mean a particular classification. In the context of the <b>News Architecture</b> , a taxonomy is a collection of <b>concept(s)</b> , with associated <b>code(s)</b> . A taxonomy may support typed relationships between concepts. Such a taxonomy is sometimes known as an <b>ontology</b> or <b>thesaurus</b> .
thesaurus	See <b>taxonomy</b> .
tuple	A set of values. The word tuple is a generalisation of the sequence: couple, triple, quadruple, quintuple, sextuple, etc. Tuples are conventionally written as a comma-separated list of items, enclosed within braces, e.g. { <b>scheme alias, code</b> }.
type	See <b>concept type</b> .
unambiguous identifier	An identifier is unambiguous if it identifies one and only one object (but an object may have several different unambiguous identifiers). See also <b>globally unique identifier</b> .
unconstrained metadata container	A <b>metadata container</b> that accepts <b>code(s)</b> from any <b>controlled vocabulary</b> and of any <b>concept type</b> .
unique identifier	The only identifier of a resource. See also <b>persistent identifier</b> , <b>unambiguous identifier</b> , and <b>globally unique identifier</b> (GUID)
Web resource	The data content that can be retrieved from a Web server using a Web-compliant transport protocol. See also <b>resource</b> .



## 13 References

Table 228. References

Subject	Description
<b>IPTC Documents</b>	
NML-BR	IPTC NewsML 2 Business Requirements: <a href="http://www.newsml.org/dl.php?fn=NewsML/2.0/specification/NewsML_2.0-spec-BusinessRequirements_1.pdf">http://www.newsml.org/dl.php?fn=NewsML/2.0/specification/NewsML_2.0-spec-BusinessRequirements_1.pdf</a>
EventsML-G2	Specifications for EventsML-G2: <a href="http://www.iptc.org/std/EventsML-G2/1.0/specification/">http://www.iptc.org/std/EventsML-G2/1.0/specification/</a>
NewsML-G2	Specifications for NewsML-G2: <a href="http://www.iptc.org/std/NewsML-G2/2.0/specification">http://www.iptc.org/std/NewsML-G2/2.0/specification</a>
IPTC NewsCodes	All IPTC codes to categorise content or to express functional features can be obtained as NewsCodes from: <a href="http://www.newscodes.org">http://www.newscodes.org</a>
<b>Other References</b>	
XMLSCHEMA-1.0	W3C XML Schema 1.0 specifications at: <a href="http://www.w3.org/TR/xmlschema-1/">http://www.w3.org/TR/xmlschema-1/</a> , <a href="http://www.w3.org/TR/xmlschema-2/">http://www.w3.org/TR/xmlschema-2/</a>
XSD	W3C XML schema: <a href="http://www.w3.org/XML/Schema">http://www.w3.org/XML/Schema</a>
XMLDSIG	XML-Signature Syntax and Processing: <a href="http://www.w3.org/TR/xmlsig-core/">http://www.w3.org/TR/xmlsig-core/</a>
RDF	Resource Description Framework (RDF): <a href="http://www.w3.org/RDF/">http://www.w3.org/RDF/</a>
BCP47	Tags for Identifying Languages, IETF: <a href="http://rfc.net/bcp47.html">http://rfc.net/bcp47.html</a>
iCalendar	iCalendar as specified by RFC 2445: <a href="http://www.ietf.org/rfc/rfc2445.txt">http://www.ietf.org/rfc/rfc2445.txt</a>



## 14 Index

### 14.1 Elements

#### A

a ... 59  
access ... 51  
accessStatus ... 52  
accountable ... 53  
address ... 180  
affiliation ... 55  
altId ... 56  
altLoc ... 57  
altRep ... 58  
area ... 91  
assert ... 60  
assignedTo ... 61  
audience ... 62

#### B

bag ... 63  
bit ... 64  
born ... 99  
br ... 152  
broader ... 65  
by ... 66

#### C

capacity ... 67  
catalog ... 68  
catalogRef ... 190  
channel ... 71  
channel (NewsML-G2) ... 69  
concept ... 72  
conceptID ... 74  
conceptItem ... 75  
conceptSet ... 77  
confirmation ... 78  
contactInfo ... 79  
contentCreated ... 94  
contentMeta (Concept Items) ... 80  
contentMeta (Knowledge Items) ... 81  
contentMeta (News Items) ... 82  
contentMeta (Package Items) ... 83  
contentModified ... 95  
contentSet ... 86  
contributor ... 87  
copyrightHolder ... 88  
copyrightNotice ... 89  
country ... 90  
created ... 106  
creator ... 92

creditline ... 93

#### D

dateline ... 104  
dates ... 105  
definition ... 73  
description ... 107  
destinaion ... 108  
details ... 157  
died ... 100  
dissolved ... 101  
duration ... 109

#### E

edNote ... 110  
email ... 112  
embargoed ... 96  
end ... 113  
event ... 114  
eventDetails ... 115  
events ... 117  
exclAudience ... 118  
exDate ... 119  
exRule ... 120

#### F

facet ... 121  
fax ... 122  
filename ... 123  
firstCreated ... 97  
founded ... 102

#### G

g2contentType ... 124  
generator ... 126  
genre ... 127  
geoAreaDetails ... 129  
group ... 130  
groupRef ... 131  
groupSet ... 132

#### H

header ... 159  
headline ... 133

#### I

icon ... 134  
im ... 142  
infoSource ... 143  
inline ... 135





inlineData (NewsML-G2) ... 136  
 inlineRef ... 138  
 inlineXML (NewsML-G2) ... 139  
 instanceOf ... 141  
 itemClass ... 125, ... 144  
 itemMeta ... 145  
 itemRef ... 146  
 itemSet ... 147

**K**

keyword ... 149  
 knowledgeItem ... 150

**L**

language ... 151  
 line ... 54  
 link ... 153  
 locality ... 154  
 located ... 155  
 location ... 156  
 location (EventsML-G2) ... 116

**M**

memberOf ... 158

**N**

name (Concept Name) ... 76  
 name (Property Value Name) ... 184  
 narrower ... 160  
 newsCoverage ... 161  
 newsCoverageStatus ... 162  
 newsItem (NewsML-G2) ... 163  
 newsMessage ... 164  
 note ... 165

**O**

objectDetails ... 166  
 occurStatus ... 167  
 openHours ... 168  
 organisationDetails ... 170  
 organiser ... 171  
 origin ... 169

**P**

packageItem ... 172  
 participant ... 173  
 participationRequirement ... 174  
 partMetadata ... 175  
 personDetails ... 177  
 phone ... 178  
 POIDetails ... 179  
 position ... 128  
 postalCode ... 181  
 priority ... 182

profile ... 183  
 provider ... 85  
 pubStatus ... 185

**R**

rb ... 199  
 rDate ... 186  
 regionDelim ... 218  
 registration ... 188  
 related ... 189  
 remoteContent (NewsML-G2) ... 191  
 rightsInfo ... 195  
 role ... 196, ... 197  
 rp ... 200  
 rRule ... 187  
 rt ... 201  
 ruby ... 198

**S**

sameAs ... 202  
 scheme ... 204  
 sender ... 205  
 sent ... 103  
 service ... 111  
 signal ... 206  
 slugline ... 207  
 span ... 208  
 start ... 209  
 subject ... 210

**T**

timeDelim ... 211  
 timestamp ... 213  
 title (Item Title) ... 148  
 transmitId ... 214  
 type ... 215

**U**

urgency ... 216  
 usageTerms ... 217

**V**

versionCreated ... 98

**W**

web ... 219



## 14.2 Datatypes

### A

AnyltemType ... 223  
ApproximateDateTimePropType ... 224  
AudienceType ... 225

### B

BlockType ... 226

### C

ConceptIdType ... 227  
ContentMetadataType ... 228

### D

DateOptTimePropType ... 229  
DateOptTimeType ... 230  
DateTimeOrNullPropType ... 231  
DateTimePropType ... 232

### E

ElectronicAddressTechType ... 234  
ElectronicAddressType ... 233

### F

Flex1ConceptPropType ... 235  
Flex1PartyPropType ... 236  
Flex1PropType ... 237  
FlexLocationPropType ... 238  
FlexOrganisationPropType ... 239  
FlexPartyPropType ... 240  
FlexPersonPropType ... 241  
FlexPropType ... 242

### I

Int100Type ... 243  
Int1To9Type ... 244  
IntIStringType ... 245  
IRIType ... 246

### L

Label1Type ... 247  
Link1Type ... 248

### Q

QCodeListType ... 250  
QCodePropType ... 251  
QCodeType ... 252  
QualPropType ... 253

### R

RecurrenceRuleType ... 254  
RelatedConceptType ... 255  
remoteInfo ... 194  
RightsLabelType ... 256

### T

TruncatedDateTimePropType ... 257  
TruncatedDateTimeType ... 258  
TypedQualPropType ... 259

### V

VersionedStringType ... 260



## Contact Information

Contact the IPTC by:

Postal mail:  
20 Garrick Street  
London WC2E 9BT  
United Kingdom

Web:

[www.iptc.org](http://www.iptc.org)

Email:

[office@iptc.org](mailto:office@iptc.org)